


SATA to eSATA Transition Cable (7Pin/7Pin), 18-in.

MODEL NUMBER: **P952-18I**

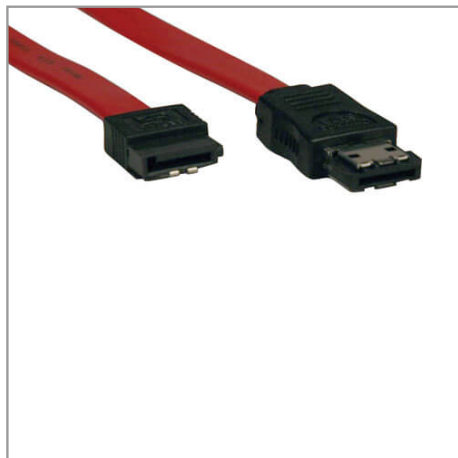

Highlights

- SATA Internal "L" to External eSATA "I" Cable - 18 in.
- Supports data transfer rates of up to 6.0 Gbps
- Cable is shielded to protect against EMI/RFI line noise

Package Includes

- SATA to eSATA Transition Cable - 18 in.

Description

Tripp Lite's SATA to eSATA Transition Cable allows new eSATA devices to be connected to older style SATA ports. Cable is optimized for data storage with up to 6Gbps transfer rate.

Features

- SATA Internal "L" to External eSATA "I" Data Cable - 18 in.
- Supports data transfer rates up to 6Gbps
- Fully shielded cable to protect against EMI/RFI line noise

Specifications

INPUT	
Cable Length (ft.)	2
Cable Length (m)	1
Cable Length (in.)	18
Cable Length (cm)	46
PHYSICAL	
Shipping Dimensions (hwd / in.)	5.300 x 3.900 x 0.500
Shipping Dimensions (hwd / cm)	13.46 x 9.91 x 1.27
Shipping Weight (lbs.)	0.1400
Shipping Weight (kg)	0.06
Color	Red



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

ENVIRONMENTAL	
Operating Temperature Range	0 ~ 40C (32F ~ 104F)
Storage Temperature Range	-20 ~ 65C (-4F ~ 149F)
Operating Humidity Range	20 to 80%
Storage Humidity Range	10 to 90%
CONNECTIONS	
Side A - Connector 1	7 PIN SATA (MALE)
Side B - Connector 1	7 PIN ESATA (MALE)
CERTIFICATIONS	
Certifications	ROHS
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>