

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:

HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED
PER MIL-G-45204 B TYPE 1
0.00001" [0.000254] THK MINIMUM.


SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE

MAXIMUM CURRENT: 1.0 AMPS
MAXIMUM VOLTAGE: 600 W.V.D.C.
MAXIMUM TEMPERATURE: 200°F (93°C)


3. FEATURES:

HOOK FITS COMPONENTS UP TO Ø0.025" [0.64].
PIN PERMITS CONNECTION TO 0.025" [0.64] SQ.
OR Ø0.030" [0.76] SOCKETS.



ACTUAL SIZE

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

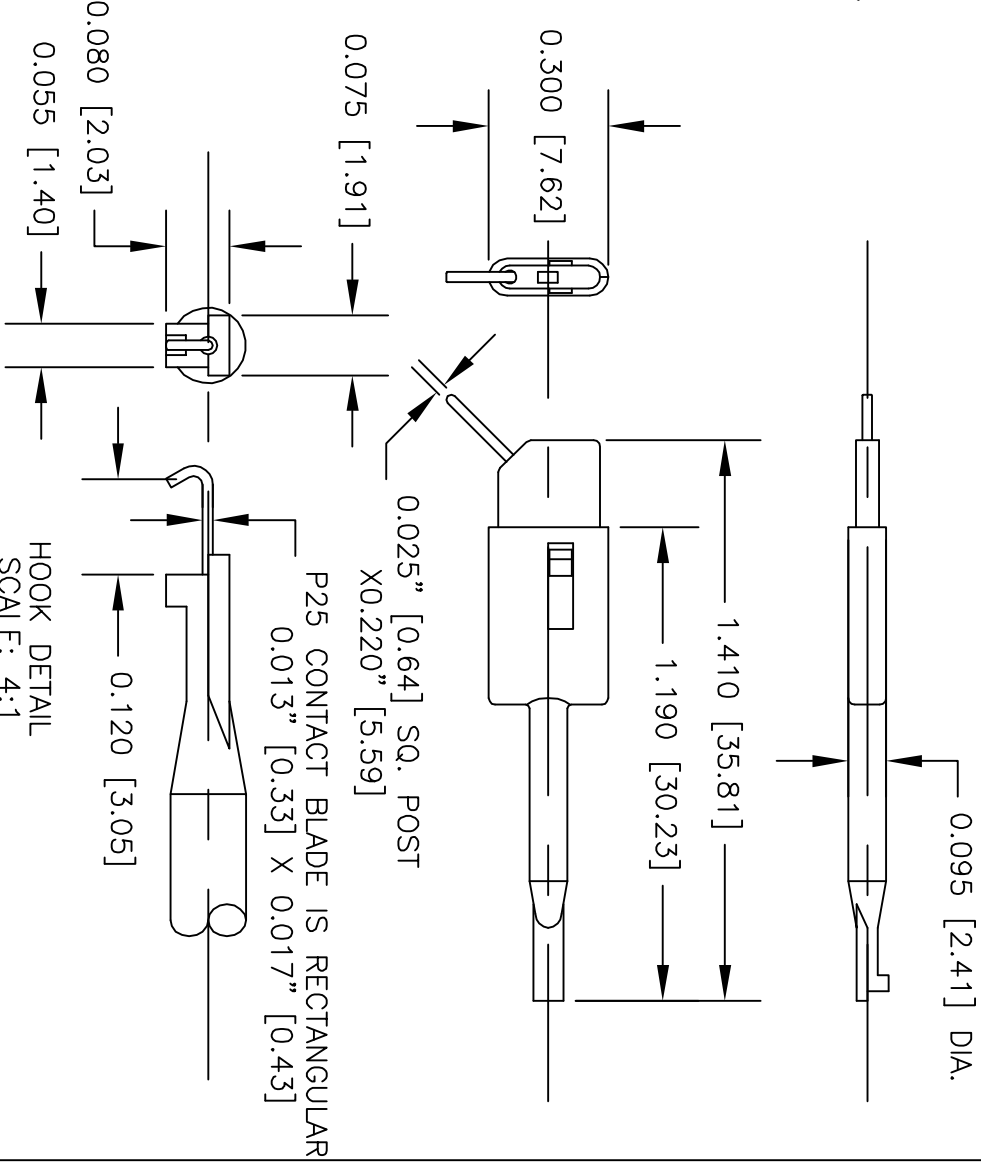

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		DESCRIPTION E-Z-HOOK [®] DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
		MATERIAL SEE NOTE.	DRAWN	R.L.	6/09	[6.35] PICO HOOK WITH 0.25 POST GOLD PLATED		
			APPROVED BY					
		FINISH SEE NOTE.				SIZE CODE IDENT NO. DRAWING NO. REV.		
NEXT ASSY	USED ON					A 08505 P25COLOR		
APPLICATION	DO NOT SCALE DRAWING					SCALE 2:1	SHEET 1 OF 1	