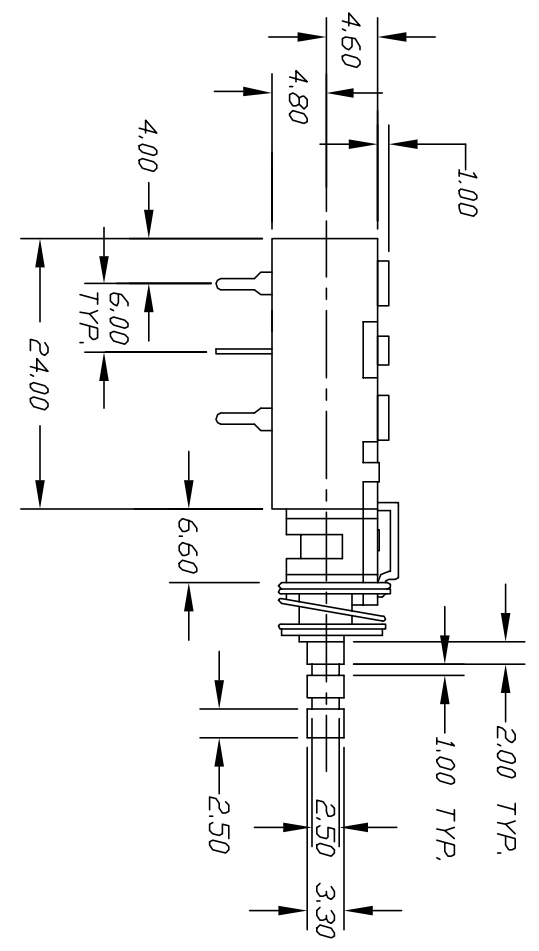
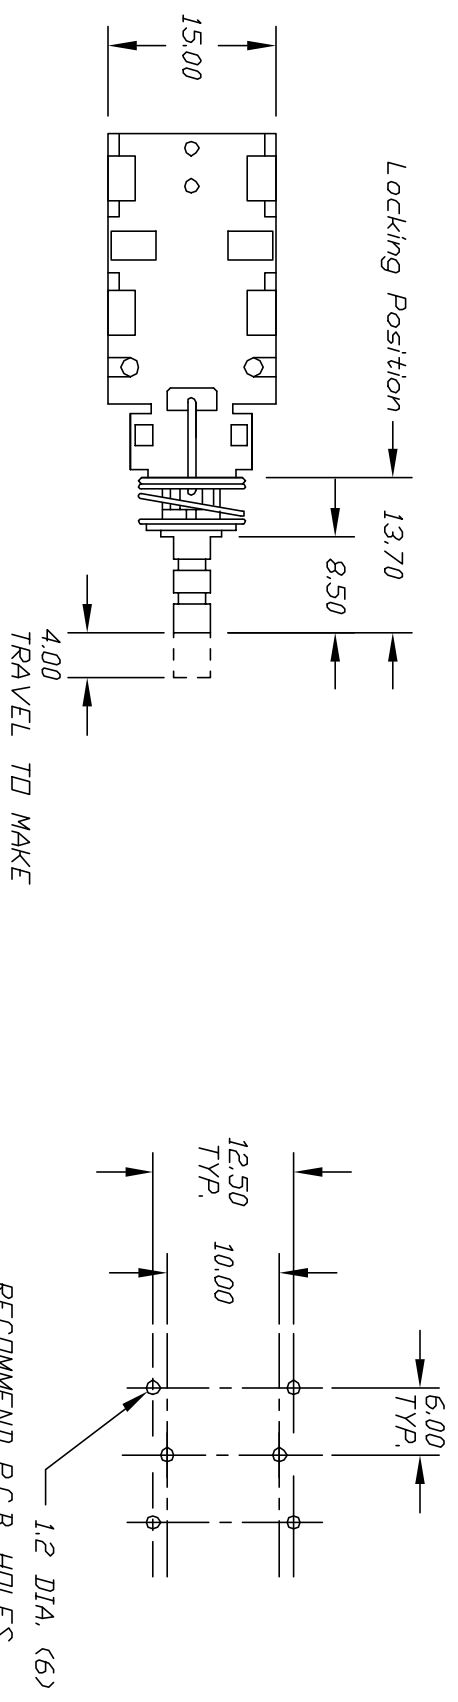


NOTES:

1. ALL DIMENSIONS IN MM [IN]
2. RATING: AC 125V 7A, AC 250V 4A
3. CONTACT RESISTANCE: 20mΩ Ohms Max. at 5V DC 1A
4. DIELECTRIC STRENGTH: AC 1500V RMS
5. OPERATING FORCE: 550±150gf

TOLERANCES			TITLE		
0.0	±0.4		P227 EE 2 D XC		
0.00	±0.25				
E-SWITCH®			P227 EE 2 D XC		
RELEASED FOR PRODUCTION			P227 EE 2 D XC		
DESCRIPTION			P227 EE 2 D XC		
DATE			P227 EE 2 D XC		
CHKD			P227 EE 2 D XC		
RJC			P227 EE 2 D XC		
REV.			P227 EE 2 D XC		
THE INFORMATION CONTAINED IN THIS DOCUMENT			P227 EE 2 D XC		
IS PROPRIETARY TO E-SWITCH AND IS			P227 EE 2 D XC		
NOT TO BE COPIED OR TRANSFERRED			P227 EE 2 D XC		
SCALE			P227 EE 2 D XC		
1.5:1			P227 EE 2 D XC		
DATE			P227 EE 2 D XC		
03/07/01			P227 EE 2 D XC		
DR			P227 EE 2 D XC		
RJC			P227 EE 2 D XC		
DWG			P227 EE 2 D XC		
P030120			P227 EE 2 D XC		
REV			P227 EE 2 D XC		
A			P227 EE 2 D XC		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[P227EE2DXA](#) [P227EE2B18A](#) [P227EE2B20B](#) [P227EE1B18C](#) [P227EE2A20A](#) [P227EE2B20A](#) [P227EE2DXC](#)
[P227EE1DXA](#) [P227EE1CCTAMBLK](#) [P227EE2B18B](#) [P227EE2B18C](#) [P227OA2B20C](#) [P227EE1CXCTADWHT](#)
[P227EE1B20BTADWHT](#) [P227EE1B18A](#) [P227EE2B18CTAGBLK](#)