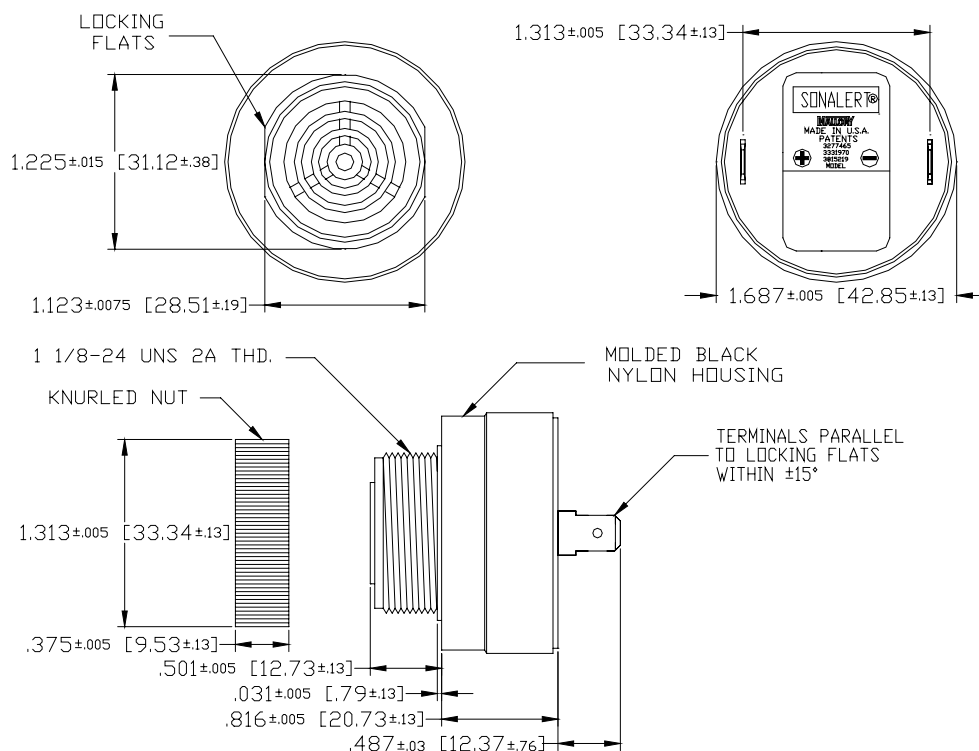


**Specifications:**

|                         |                                   |
|-------------------------|-----------------------------------|
| Sound level Category    | Medium Sound Level                |
| Mode of Operation       | Continuous tone                   |
| Mounting                | Panel (see note)                  |
| Voltage Rating          | 6 to 28 Vdc                       |
| Frequency               | 1900 Hz $\pm$ 500 Hz              |
| Loudness (Min. Voltage) | 60 dB(A) min. @ 2 FT and 6 Vdc    |
| Loudness (Max Voltage)  | 75 dB(A) min. @ 2FT and 28 Vdc    |
| Current Draw            | 5 mA Max @ 6 Vdc                  |
| Current Draw            | 18 mA Max @ 28 Vdc                |
| Storage Temperature     | -40°C to +85°C                    |
| Operating Temperature   | -30°C to +65°C                    |
| Weight (Typical)        | 1.6 oz (42 g)                     |
| Housing                 | 6/6 Nylon, Color Black            |
| Options                 | For other options contact factory |

**Dimensions:** Inches (mm)

NOTE: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.