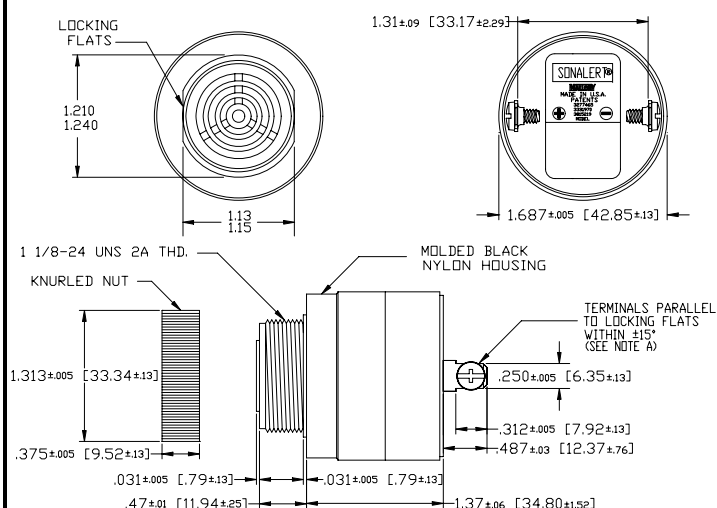


**Specifications:**


|                         |                                   |
|-------------------------|-----------------------------------|
| Sound level Category    | Medium Sound Level                |
| Mode of Operation       | High Frequency - Slow Pulse       |
| Mounting                | Panel (see note B)                |
| Voltage Rating          | 6 to 28 Vdc                       |
| Frequency               | 4500 Hz $\pm$ 500 Hz              |
| Loudness (Min. Voltage) | 68 dB(A) min. @ 2 FT and 6 Vdc    |
| Loudness (Max Voltage)  | 80 dB(A) min. @ 2 FT and 28 Vdc   |
| Current Draw            | 4 mA Max @ 6 Vdc                  |
| Current Draw            | 20 mA Max @ 28 Vdc                |
| Min. Pulse Rate         | 0.5 @ 6 VDC                       |
| Max. Pulse Rate         | 2.0 @ 28 VDC                      |
| Duty Cycle %            | 50 (Approx)                       |
| Storage Temperature     | -40°C to +85°C                    |
| Operating Temperature   | -30°C to +65°C                    |
| Weight (Typical)        | 1.6 oz (45 g)                     |
| Housing                 | 6/6 Nylon, Color Black            |
| Options                 | For other options contact factory |

**Dimensions:** Inches (mm)

**UL Recognized**
**RoHS Compliant**
**PART DIMENSIONS BEFORE CODE DATE 0824 5**


NOTE A: TERMINALS-.032 BRASS TIN PLATED, TAPPED FOR #6-32 SCREW. TWO #6-32 NICKEL PLATED BRASS SCREWS INCLUDED. WILL ACCEPT 1/4" QUICK CONNECT.

NOTE B: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.

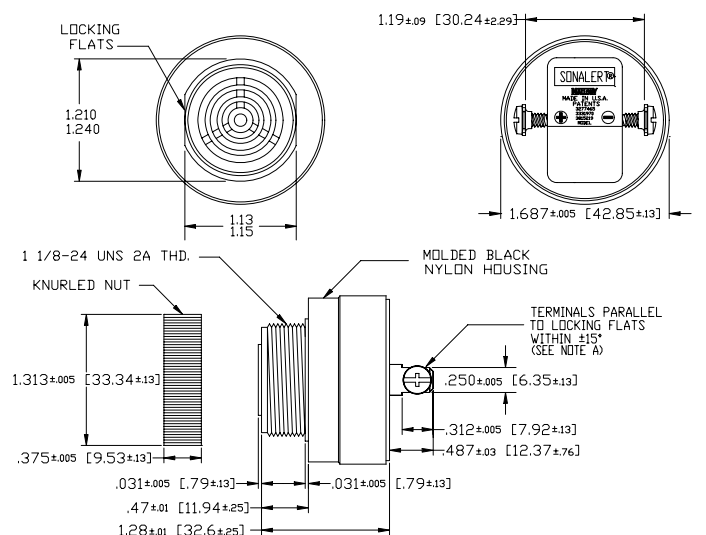**PART DIMENSIONS AFTER CODE DATE 0825 1**


NOTE A: TERMINALS-.032 BRASS TIN PLATED, TAPPED FOR #6-32 SCREW. TWO #6-32 NICKEL PLATED BRASS SCREWS INCLUDED. WILL ACCEPT 1/4" QUICK CONNECT.

NOTE B: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.