FO-50360-L

CW-B8952

REV	DOCUMENT	CHANGED BY	CHECK
2	202161	DLT 18JAN01	SAV
3	207439	TSM 13FEB03	SAV

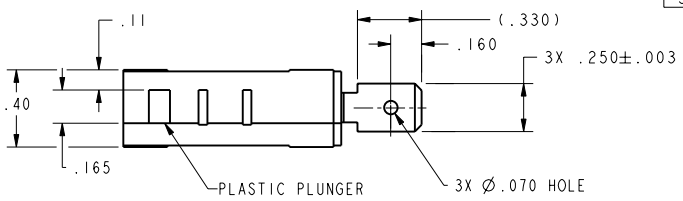

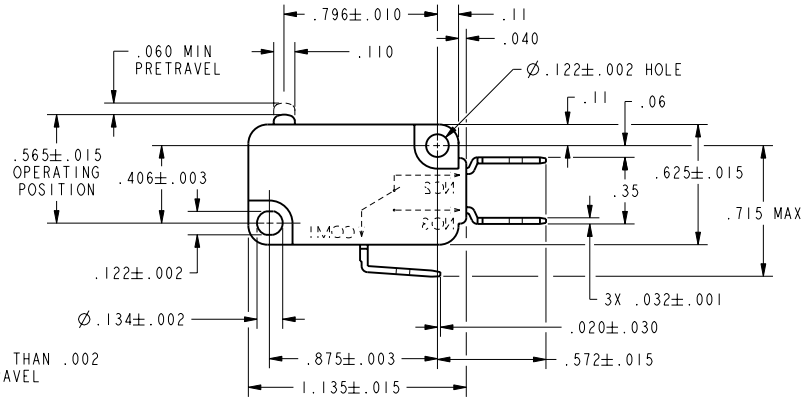

NOTE
1 - PLUNGER MUST NOT PROTRUDE MORE THAN .002 ABOVE CASE WHEN AT FULL OVERTRAVEL
2 - RESTRICTED LLISTING
3 - TERMINALS ARE SILVER PLATED

CHARACTERISTICS	
OPERATING FORCE	160 GRAMS MAX
RELEASE FORCE	20 GRAMS MIN
DIFFERENTIAL TRAVEL	.002-.010
OVERTRAVEL	.037 MIN
FREE POSITION	.625 MAX
RELEASE TRAVEL	.010 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT
S P D T
21A 1HP 125, 250, 277 VAC
2HP 250, 277 VAC

16 (4) ~ 250 T85 1E5 ⚡⚡

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

		US(inch)	SI(mm)
NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0.4
TWO PLACE	.XX	±.015	±0.15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	DLT	18JAN01
CHECK	SAV	18JAN01

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-1V10E9-000-2	3

SCALE 2:1 | WEIGHT | SHEET 1 OF 1

Downloaded from Elcodis.com electronic components distributor