


FIXED CHIP RESISTOR NETWORKS; RECTANGULAR TYPE

KAMAYA OHM

RAC168U

●Features

- 1. Highly suitable for the purposes of pull-up and pull-down.
- 2. Easy to handle because of no specified direction for mounting due to the symmetrical position of common terminals.
- 3. Please contact KAMAYA for Halogen free product of RAC168U series.
- 4. Stability Class : 5%

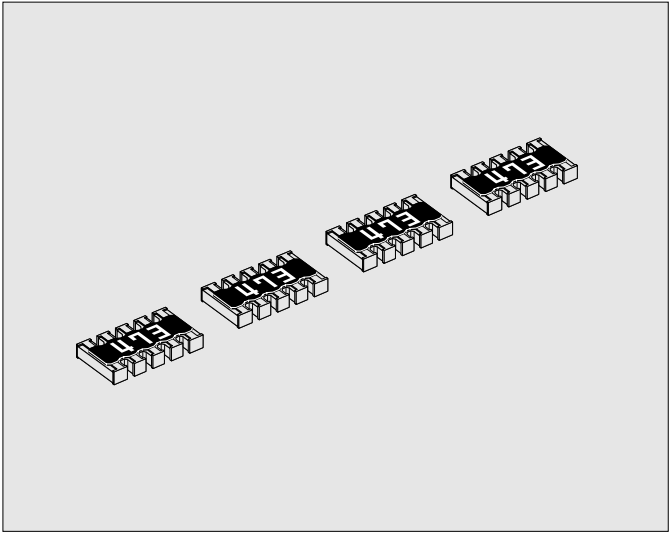

●Dimensions and Circuits

Circuits


Rated resistance is marked with 3-digit on the over coating.

| Style | Terminal Style | L | W | H | D | Q ₁ | *Q ₂ | a | b | *P | *Unit weight/pc. |
|---------|----------------|---------|---------|---------|-----------|----------------|-----------------|----------|----------|------|------------------|
| RAC168U | C | 3.2±0.2 | 1.6±0.1 | 0.5±0.1 | 0.32±0.10 | 0.32±0.10 | 0.53 | 0.3 ±0.2 | 0.3±0.15 | 0.64 | 7.6mg |

Unit : mm

*Values for reference

●Application Examples



- Making the parallel 8-Elements resistor for pull-up / pull-down into one chip.
- Ideal for high density SMT applications as direct mounting on the bus line is possible.

●Part Number Description

Example

RAC

16

8

U

103

J

C

TP

Product Type

No. of Elements
8 8-Elements

Rated Resistance
E24 Series
e.g. : 103=10k ohm

Terminal Style
C Convex Type With corner

Size
16 W:1.6mm

Circuits
U Common Electrode 2: Same Type

Tolerance on Rated Resistance
J ±5%

* Packaging & Standard Qty. (Min.)
B Bulk (Loose Package) 1,000pcs.
TP Paper Tape 5,000pcs.

*Refer to Tape and Packaging information on pages 56 and 57.

FIXED CHIP RESISTOR NETWORKS; RECTANGULAR TYPE

RAC168U

●Ratings

| Style | Rated Dissipation at 70°C W | Rated Resistance Range | Tolerance on Rated Resistance | Temperature Coefficient of Resistance 10 ⁻⁶ /°C | Limiting Element Voltage V | Preferred Number Series for Resistors | Isolation Voltage V | Category Temperature Range °C |
|---------|-----------------------------------|---------------------------|----------------------------------|--|----------------------------------|---|---------------------------|-------------------------------------|
| RAC168U | 0.063 | 10Ω~18Ω | J(±5%) | ±250 | 25 | E24 | 100 | -55~+125 |
| | | 20Ω~1MΩ | | ±200 | | | | |


Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Derating Curve

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the following Curve.

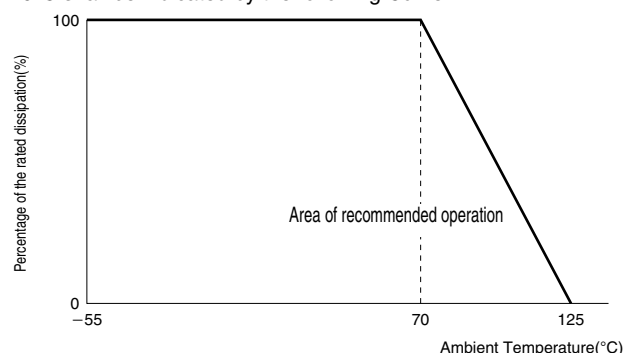

●Climatic Category

55/125/56

Lower Category Temperature -55°C
 Upper Category Temperature +125°C
 Duration of the Damp heat, Steady-State Test 56 days

●Performance Characteristics JIS C 5201-1 : 1998

| Description | Requirements | Test Methods |
|---|---|---|
| Voltage proof | No breakdown or flashover $R \geq 1G \text{ ohm}$ | Clause 4.7 100Va.c., 60s |
| Variation of resistance with temperature | See Ratings Table | Clause 4.8 Measuring temperature : +20°C/-55°C/ +20°C/+125°C/+20°C |
| Overload | $\Delta R \leq \pm(1\%+0.05 \text{ ohm})$ No visible damage, legible marking | Clause 4.13 The applied voltage shall be 2.5 times of the rated voltage or twice of the limiting element voltage, whichever is the less severe, 2s. |
| Solderability | In accordance with Clause 4.17.4.5 | Clause 4.17 235°C, 2s |
| Resistance to soldering heat | $\Delta R \leq \pm(1\%+0.05 \text{ ohm})$ | Clause 4.18 After immersion into the flux, the immersion into solder shall be carried out in Solder bath at 260°C for 5s. |
| Rapid change of temperature | $\Delta R \leq \pm(1\%+0.05 \text{ ohm})$ No visible damage | Clause 4.19 5 cycles between -55°C and +125°C. |
| Climatic sequence | $\Delta R \leq \pm(5\%+0.1 \text{ ohm})$ No visible damage | Clause 4.23 Dry/Damp heat(12+12h cycle), first cycle./ Cold/Damp heat(12+12h cycle), remaining cycle./ D.C.Load. |
| Damp test, steady state | $\Delta R \leq \pm(5\%+0.1 \text{ ohm})$ No visible damage, legible marking | Clause 4.24 40°C, 95%R.H., 56 days, test a) of Clause 4.24.2.1 |
| Endurance at 70°C | $\Delta R \leq \pm(5\%+0.1 \text{ ohm})$ No visible damage | Clause 4.25.1 Rated voltage, 1.5h"ON", 0.5h"OFF", 70°C, 1,000h. |
| Endurance at the upper category temperature | $\Delta R \leq \pm(5\%+0.1 \text{ ohm})$ No visible damage | Clause 4.25.3 125°C, no-load, 1,000h. |
| Adhesion | No visible damage | Clause 4.32 5N, 10s |
| Bend strength of the face plating | $\Delta R \leq \pm(1\%+0.05 \text{ ohm})$ | Clause 4.33 Amount of bend : 3 mm |