
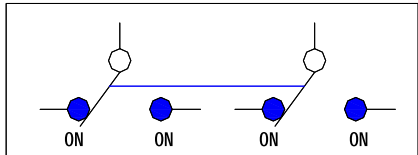
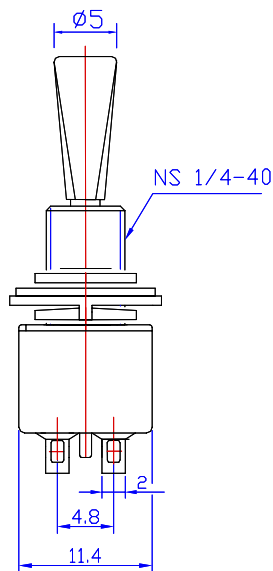
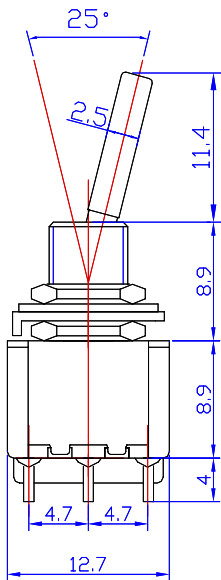


Date	Rev.	Description

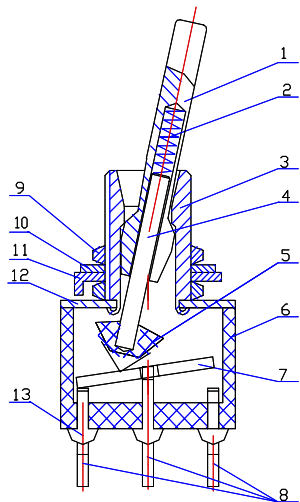

Circuit Diagram

Specification
Rating: 2A 250V AC ; 5A 125V AC
Contact R: 20 mΩ Max
Insulation R: DC500V 1000MΩ min
Dielectric strength: 1500V AC, 1 minute
Electrical life: 10,000 Cycles

DCC. NO.
A4 DRAWING NO.

MATERIAL		GOLDSUN ELECTRONICS CO., LTD.			
		JAMECO NO. 22859		GOLDSUN NO. MS-202-F1	
DRAWN: Colin		Description MINI TOGGLE SWITCH DPDT ON-ON 6P SOLDER LUGS			Rev. 1
VERIFY PEOPLE: Penny		UNIT: mm	SCALE:	SHEET 1 OF 1	CAS No: ERN No: