

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 695199



■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Ultra-miniature size, light weight
- Cooling by free air convection
- UL60601-1/IEC60601-1/EN60601-1 medical safety approved
- No load power consumption<0.75W
- 100% full load burn-in test
- Optional on-board type version available
- Fixed switching frequency at 90KHz
- High reliability
- 3 years warranty




SPECIFICATION

MODEL		NFM-20-3.3	NFM-20-5	NFM-20-12	NFM-20-15	NFM-20-24
OUTPUT	DC VOLTAGE	3.3V	5V	12V	15V	24V
	RATED CURRENT	4.5A	4.4A	1.8A	1.4A	0.92A
	CURRENT RANGE	0 ~ 4.5A	0 ~ 4.4A	0 ~ 1.8A	0 ~ 1.4A	0 ~ 0.92A
	RATED POWER	14.85W	22W	21.6W	21W	22.08W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	80mVp-p	150mVp-p	150mVp-p	240mVp-p
	VOLTAGE ADJ. RANGE	3.1 ~ 3.6V	4.5 ~ 5.4V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	500ms, 20ms/230VAC 500ms, 20ms/115VAC at full load				
	HOLD UP TIME (Typ.)	50ms/230VAC 16ms/115VAC at full load				
INPUT	VOLTAGE RANGE	85 ~ 264VAC 120 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 440Hz				
	EFFICIENCY (Typ.)	71%	75%	81%	83%	84%
	AC CURRENT (Typ.)	0.6A/115VAC 0.4A/230VAC				
	INRUSH CURRENT (Typ.)	COLD START 30A/115VAC 65A/230VAC				
	LEAKAGE CURRENT	<200uA / 240VAC				
PROTECTION	OVERLOAD	Above 105% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	3.8 ~ 4.46V	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	27.6 ~ 32.4V
	OVER TEMPERATURE Note.5	Tj 160°C typically (U1) detect on main control IC Protection type : Shut down o/p voltage, recovers automatically after temperature goes down				
ENVIRONMENT	WORKING TEMP.	-20 ~ +60°C (Refer to output load derating curve)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60601-1, TUV EN60601-1, IEC60601-1 approved				
	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC I/P-FG: 1.5KVAC O/P-FG: 1.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC				
	EMI CONDUCTION & RADIATION	Compliance to EN55011(CISPR11), EN55022 (CISPR22) Class B				
	HARMONIC CURRENT	Compliance to EN61000-3-2, -3				
	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, EN55024, EN60601-1-2, EN61204-3, medical level, criteria A				
OTHERS	MTBF	487.8Khrs min. MIL-HDBK-217F (25°C)				
	DIMENSION	89*51*19.3mm (L*W*H)				
	PACKING	0.09Kg; 105pcs/10.5Kg/0.97CUFT				
NOTE		1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. The over temperature protection (OTP) is the built-in function of the control IC (U1). The activating level described above is based on the specification provided by the IC manufacturer.				

Mechanical Specification

Unit: inch(mm)

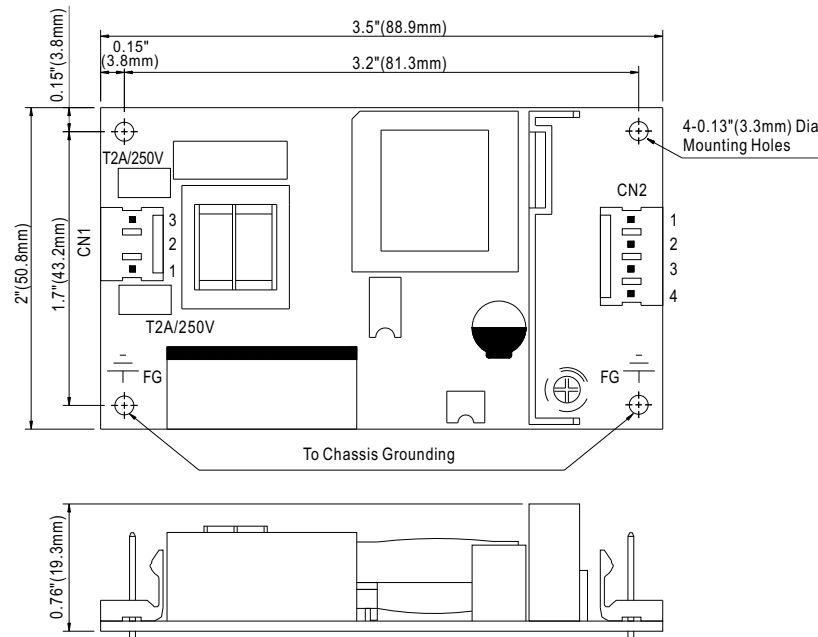

AC Input Connector (CN1) : Molex 41791-03 or equivalent


Pin No.	Assignment	Mating Housing	Terminal
1	AC/N	Molex 2139 or equivalent	Molex 2478 or equivalent
2	No Pin		
3	AC/L		

DC Output Connector (CN2) : Molex 41791-04 or equivalent


Pin No.	Assignment	Mating Housing	Terminal
1,2	+V	Molex 2139 or equivalent	Molex 2478 or equivalent
3,4	-V		

Block Diagram


fosc : 90KHz

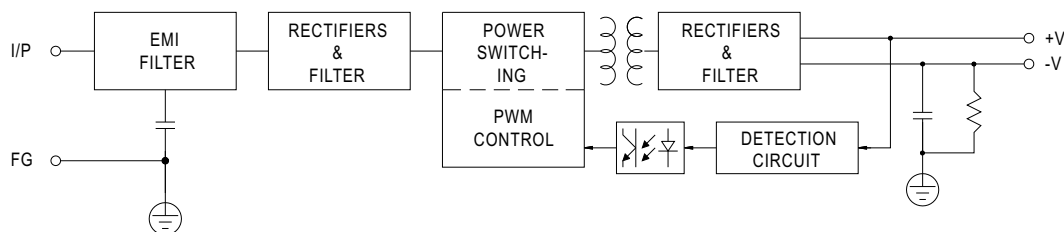

Derating Curve

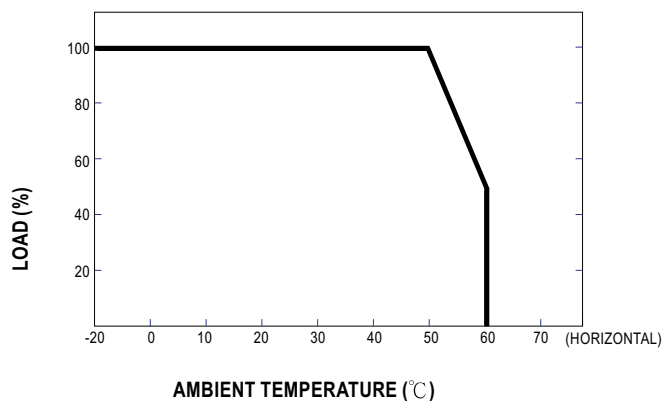

Output Derating VS Input Voltage

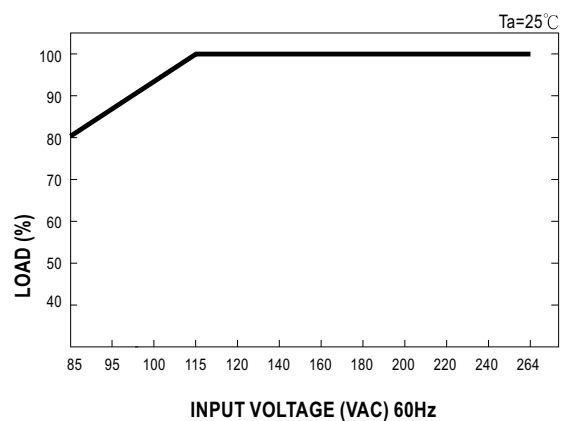

MODEL : NFM-20-5

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1: 80 mVp-p (Max)	I/P: 230VAC O/P:FULL LOAD Ta:25°C	V1: 12 mVp-p (Max)	P
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 4.5V~ 5.4 V	I/P: 230 VAC I/P: 115 VAC O/P:MIN LOAD Ta:25°C	4.34 V~ 6.26 V/ 230 VAC 4.34 V~ 6.26 V/ 115 VAC	P
3	OUTPUT VOLTAGE TOLERANCE	V1: 2 %~ -2 % (Max)	I/P:115 VAC / 264 VAC O/P:FULL/ MIN LOAD Ta:25°C	V1: 0.6 %~ -0.6 %	P
4	LINE REGULATION	V1: 1 %~ -1 % (Max)	I/P:115 VAC ~ 264 VAC O/P:FULL LOAD Ta:25°C	V1: 0 %~ 0 %	P
5	LOAD REGULATION	V1: 1.5 %~ -1.5 % (Max)	I/P: 230 VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.5 %~ -0.5 %	P
6	SET UP TIME	230VAC: 500 ms (Max) 115 VAC: 500 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 165 ms 115VAC/ 158 ms	P
7	RISE TIME	230VAC: 20 ms (Max) 115VAC: 20 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 1.3 ms 115VAC/ 1.2 ms	P
8	HOLD UP TIME	230VAC: 50 ms (TYP) 115VAC: 16 ms (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 82 ms 115VAC/ 16.1 ms	P
9	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST: <5 %	P
10	DYNAMIC LOAD	V1: 1000 mVp-p	I/P: 230 VAC O/P:FULL /Min LOAD 90%DUTY/1KHZ Ta:25°C	681 mVp-p	P

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	85VAC~264 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	58 V~264V	P
			I/P: LOW-LINE-3V= 82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK	
2	INPUT FREQUENCY RANGE	47HZ ~440 HZ NO DAMAGE OSC	I/P: 85 VAC ~ 264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK	P
3	EFFICIENCY	75 % (TYP)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	77.1 %	P
4	INPUT CURRENT	230V/ 0.4 A (TYP) 115V/ 0.6 A (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 0.33 A/ 230 VAC I = 0.48 A/ 115 VAC	P
5	INRUSH CURRENT	230V/ 65 A (TYP) 115V/ 30 A(TYP) COLD START	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 53 A/ 230 VAC I = 26 A/ 115 VAC	P
6	LEAKAGE CURRENT	< 200uA / 240 VAC	I/P: 254 VAC O/P:Min LOAD Ta:25°C	L-FG: 32 uA N-FG: 32 uA	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	Above 105 %	I/P: 230 VAC I/P: 115 VAC O/P:TESTING Ta:25°C	331 %/ 230 VAC 238 %/ 115 VAC Hiccup Mode	P
2	OVER VOLTAGE PROTECTION	CH1: 5.75V~ 6.75V	O/P:MIN LOAD Ta:25°C	6.3V/ 70mA Shut off	P
3	OVER TEMPERATURE PROTECTION	SPEC: Tj 160°C typically (U1) Detect on main control IC	I/P: 230 VAC O/P:FULL LOAD	O.T.P. Active Shut down o/p voltage , recovers automatically after temperature goes down	P
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264 VAC O/P:FULL LOAD Ta:25°C	NO DAMAGE Hiccup Mode	p

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	No load power consumption	<0.75W	I/P: 240 VAC O/P:NO LOAD	0.61W/ 240 VAC	p

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT																																																												
1	TEMPERATURE RISE TEST	MODEL : NFM-20-5 1. ROOM AMBIENT BURN-IN : 1 HRS I/P: 230VAC O/P: FULL LOAD Ta= 32 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 53.5°C <table><tr><th>NO</th><th>Position</th><th>P/N</th><th>ROOM AMBIENT Ta= 32 °C</th><th>HIGH AMBIENT Ta= 53.5°C</th></tr><tr><td>1</td><td>LF1</td><td>LF-179 LS</td><td>50.7°C</td><td>70.4°C</td></tr><tr><td>2</td><td>BD1</td><td>D2SB20 1.5A/500V SHI</td><td>53.3°C</td><td>72.3°C</td></tr><tr><td>3</td><td>C5</td><td>47U/400V NI 105°C PT</td><td>52.0°C</td><td>70.8°C</td></tr><tr><td>4</td><td>C36</td><td>47U/50V RUB 105°C YXF</td><td>61.2°C</td><td>80.3°C</td></tr><tr><td>5</td><td>ZD1</td><td>P6KE200A PAN</td><td>69.1°C</td><td>88.4°C</td></tr><tr><td>6</td><td>D1</td><td>IN4007 1A/1KV LT</td><td>70.1°C</td><td>89.5°C</td></tr><tr><td>7</td><td>D4</td><td>1N4002 1A/100V LT</td><td>61.2°C</td><td>82.6°C</td></tr><tr><td>8</td><td>T1coil</td><td>TF-1403 JSI</td><td>68.3°C</td><td>88.1°C</td></tr><tr><td>9</td><td>U1</td><td>VIPER53 ST</td><td>77.9°C</td><td>98.3°C</td></tr><tr><td>10</td><td>D100</td><td>MBR1545CT 15A/45VON</td><td>94.4°C</td><td>112.5°C</td></tr><tr><td>11</td><td>C105</td><td>470U/16V NCC 105°C KY</td><td>64.8°C</td><td>85.2°C</td></tr></table>			NO	Position	P/N	ROOM AMBIENT Ta= 32 °C	HIGH AMBIENT Ta= 53.5°C	1	LF1	LF-179 LS	50.7°C	70.4°C	2	BD1	D2SB20 1.5A/500V SHI	53.3°C	72.3°C	3	C5	47U/400V NI 105°C PT	52.0°C	70.8°C	4	C36	47U/50V RUB 105°C YXF	61.2°C	80.3°C	5	ZD1	P6KE200A PAN	69.1°C	88.4°C	6	D1	IN4007 1A/1KV LT	70.1°C	89.5°C	7	D4	1N4002 1A/100V LT	61.2°C	82.6°C	8	T1coil	TF-1403 JSI	68.3°C	88.1°C	9	U1	VIPER53 ST	77.9°C	98.3°C	10	D100	MBR1545CT 15A/45VON	94.4°C	112.5°C	11	C105	470U/16V NCC 105°C KY	64.8°C	85.2°C	P
NO	Position	P/N	ROOM AMBIENT Ta= 32 °C	HIGH AMBIENT Ta= 53.5°C																																																													
1	LF1	LF-179 LS	50.7°C	70.4°C																																																													
2	BD1	D2SB20 1.5A/500V SHI	53.3°C	72.3°C																																																													
3	C5	47U/400V NI 105°C PT	52.0°C	70.8°C																																																													
4	C36	47U/50V RUB 105°C YXF	61.2°C	80.3°C																																																													
5	ZD1	P6KE200A PAN	69.1°C	88.4°C																																																													
6	D1	IN4007 1A/1KV LT	70.1°C	89.5°C																																																													
7	D4	1N4002 1A/100V LT	61.2°C	82.6°C																																																													
8	T1coil	TF-1403 JSI	68.3°C	88.1°C																																																													
9	U1	VIPER53 ST	77.9°C	98.3°C																																																													
10	D100	MBR1545CT 15A/45VON	94.4°C	112.5°C																																																													
11	C105	470U/16V NCC 105°C KY	64.8°C	85.2°C																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 200% LOAD Ta:25°C	TEST : OK	P																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 230 VAC O/P: 100% LOAD Ta= -20 °C	TEST : OK	P																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P: 272 VAC O/P:FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK	P																																																												
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~50°C)	I/P: 230 VAC O/P:FULL LOAD	± 0.01 %(0~50°C)	P																																																												
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency:10~500Hz (3) Sweep Time:10min/sweep cycle (4) Acceleration:2G (5) Test Time:1 hour in each axis (X.Y.Z) (6) Ta:25°C		TEST : OK	P																																																												

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 4 KVAC/min I/P-FG: 1.5 KVAC/min O/P-FG: 1.5 KVAC/min	I/P-O/P: 4.2 KVAC/min I/P-FG: 1.8 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 0.82 mA I/P-FG: 0.06 mA O/P-FG: 0.06 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 30 GΩ I/P-FG: 30 GΩ O/P-FG: 29 GΩ NO DAMAGE	P
3	APPROVAL	TUV: Certificate NO : TA50083713 UL: File NO : E227340			P

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS	P
2	CONDUCTION	EN55022 EN55011 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab	P
3	RADIATION	EN55022 EN55011 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab	P
4	E.S.D	EN61000-4-2 MEDICAL AIR:8KV / Contact:6KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
5	E.F.T	EN61000-4-4 MEDICAL INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
6	SURGE	IEC61000-4-5 MEDICAL L-N :2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
7	Test by certified Lab & Test Report Prepare				

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT I/P: 230VAC O/P:FULL LOAD Ta= 25 °C LIFE TIME= 166373 HRS I/P: 230VAC O/P:FULL LOAD Ta= 50 °C LIFE TIME= 31759 HRS			P
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE: 487.8KHRS			P

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage	U1 Rated VIPER53 : 620 V 2.3A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25°C	(1) 586 V (2) 530 V (3) 612 V	P
2	Diode Peak Voltage	D100 Rated MBR1545CT : 45V 15 A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25°C	(1) 40 V (2) 33.4 V (3) 33.8 V	P
3	Clamp Diode Peak Voltage	D1 Rated IN4007 : 1KV 1 A	I/P:High-Line +3V = 267 V O/P: (1)Full Load (2) Dynamic Load 90%Duty/1KHz Ta:25°C	(1) 502 V (2) 530 V	P
4	Input Capacitor Voltage	C5 Rated :47u / 400V/ 105°C	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change (4)Burn in 1hour Ta:25°C	(1) 377 V (2) 383 V (3) 383 V (4) 377 V	P
5	Control IC Voltage Test	U1 Rated VIPER53 : 19V	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta:25°C	(1) 13.4 V (2) 10.5 V (3) 13.4 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2006/4/3	RD SAMPLE	PASS	VINCENT TSENG	MAX LIN
2006/6/29	PRODUCT SAMPLE W0604C12	PASS	VINCENT TSENG	MAX LIN

2003/12/12 A50-F023