

4

3

2

1

LOC	DIST	REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD
		REVISED PER ECO-11-004587			11MAR11	RK	HMR




MATERIALS:
HOUSING: POLYAMIDE, UL94V-0, BLACK.
TERMINALS: COPPER ALLOY, TIN PLATED.
SCREWS: STEEL, ZINC PLATED, UNLESS OTHERWISE STATED.

ELECTRICAL:
RATING: 20A, UL & CSA.


MECHANICAL:
WIRE RANGE: 12-22 AWG.
MAXIMUM TIGHTENING TORQUE: 7 IN-LBS.

ENVIRONMENTAL:
CONTINUOUS OPERATING TEMP.: -40°C TO +105°C

- 1 PRELIMINARY PART NUMBER.
- 2 SCREWS ARE NICKEL PLATED BRASS.

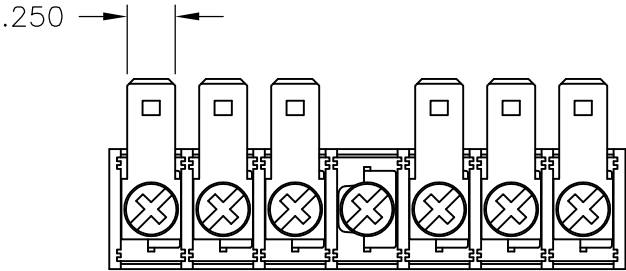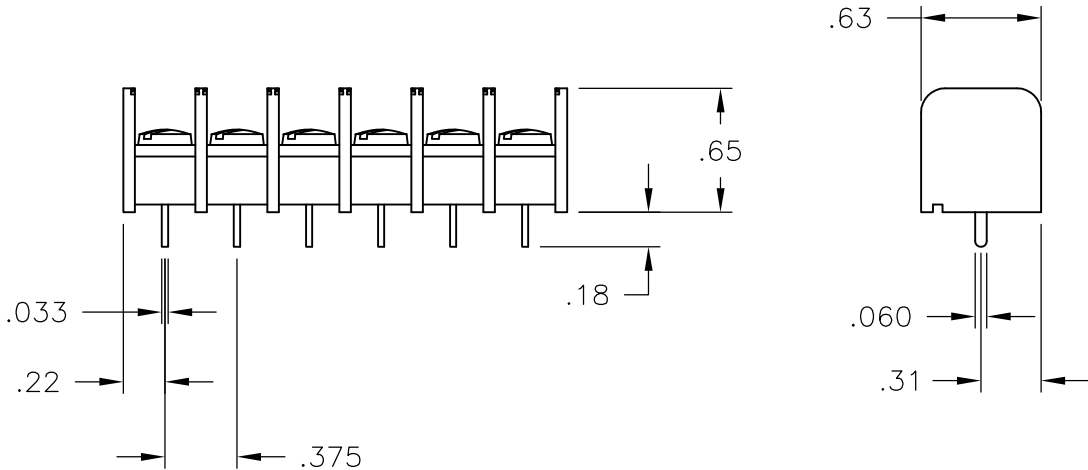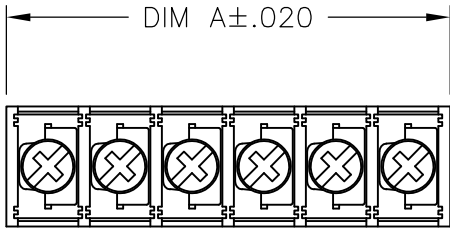

1546834-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 8/17/04	 TE Connectivity				
		CHK S YODER 8/17/04					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S YODER 8/17/04	NAME NC6-P107-XX ASSEMBLY				
	0 PLC ± -	PRODUCT SPEC					
	1 PLC ± -	-					
	2 PLC ± .02	APPLICATION SPEC					
	3 PLC ± .010	-					
	4 PLC ± -	-					
ANGLES ± -		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-1437664-4	RESTRICTED TO -	
MATERIAL -	FINISH -	CUSTOMER DRAWING					
			SCALE NTS	SHEET 1 OF 1	REV B1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[NC6-P107-08](#)