

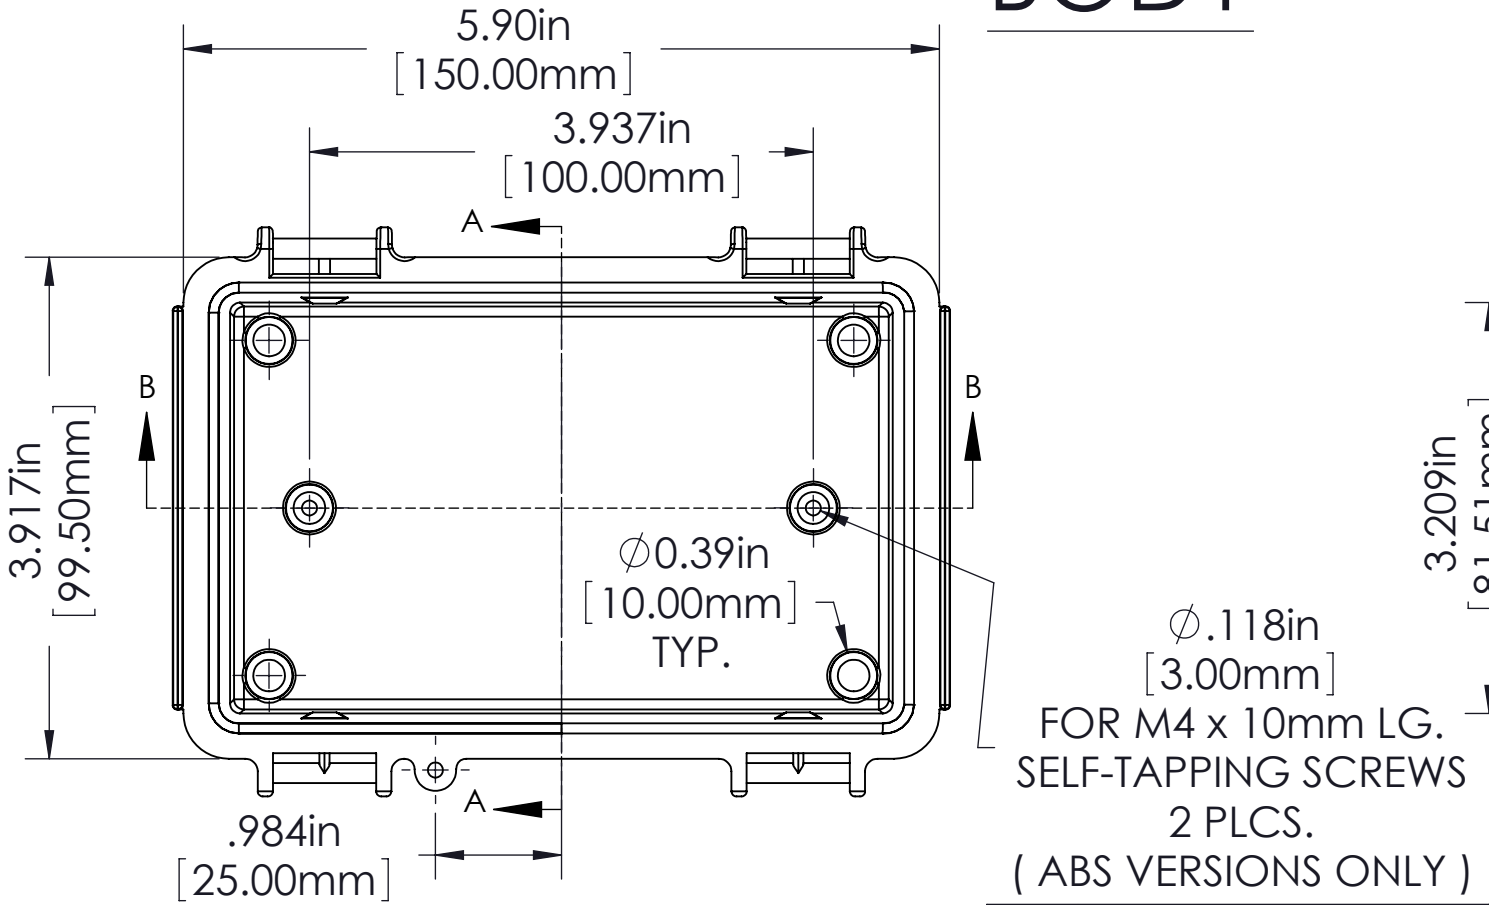


PART NAME	NBF SERIES PLASTIC NEMA BOX			PART No.	NBF-32004 & NBF-32104 & NBF-32204 & NBF-32304 & NBF-32404		REVISION DATE	9/1/2010
MATERIAL	FLAMMABILITY RATING	CONTINUOUS OPERATING TEMP.	FINISH: BODY_____ LIGHT GRAY COVER_____ LIGHT GRAY OR CLEAR LATCHES & HINGES_____ PLASTIC WALL MOUNTING BRACKETS__ STAINLESS STEEL & HARDWARE					
ABS	UL94-HB	-40°C ~ +60°C / -40°F ~ 140°F						
CLEAR PC	UL94-V0 UV STABILIZED	-40°C ~ +130°C / -40°F ~ 266°F						
ABS / PC BLEND	UL94-5VA	-40°C ~ +85°C / -40°F ~ 185°F						
PBT / PC BLEND	UL94-5VA + UV (f1)	-40°C ~ +75°C / -40°F ~ 167°F						


BODY

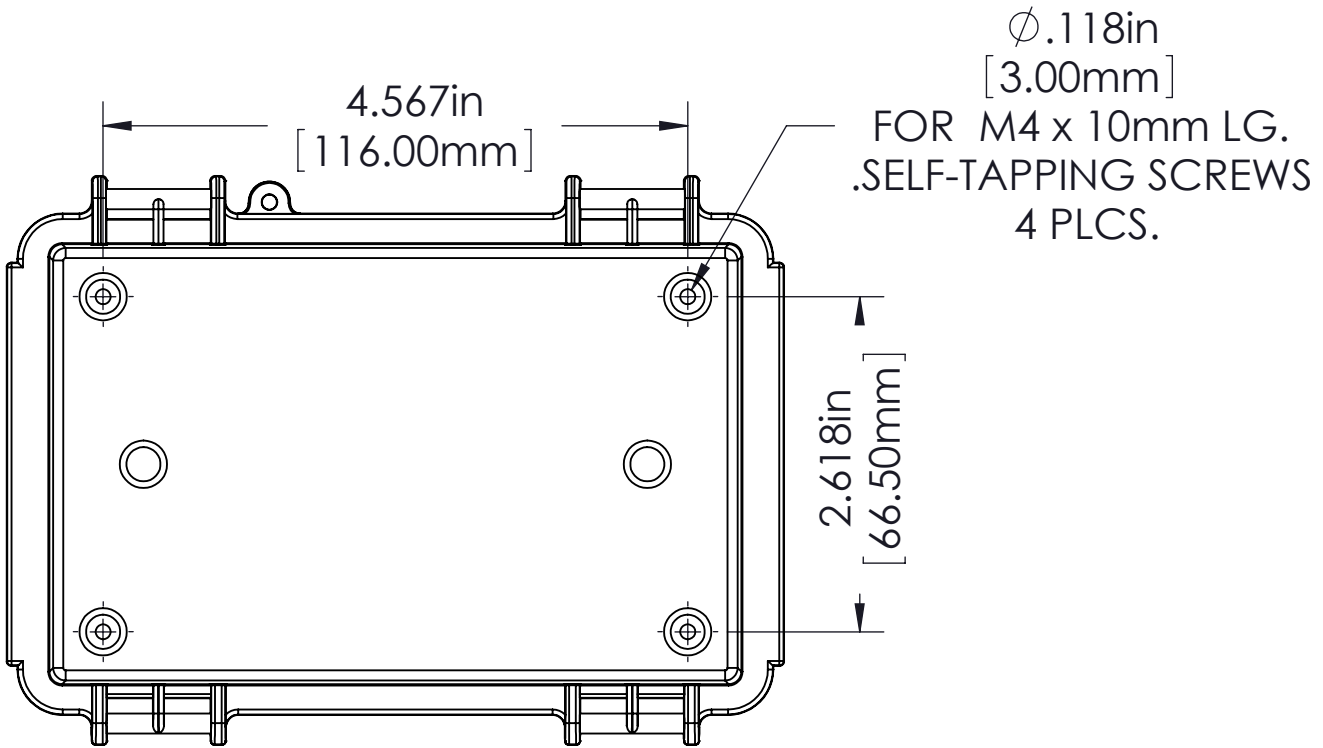



Ø.118in [3.00mm]
FOR M4 x 10mm LG. SELF-TAPPING SCREWS 2 PLCS.
(ABS VERSIONS ONLY)
M4 THREADED INSERTS ON ALL OTHER VERSIONS USE M4 x 8mm LG. MACHINE SCREWS. 2 PLCS.

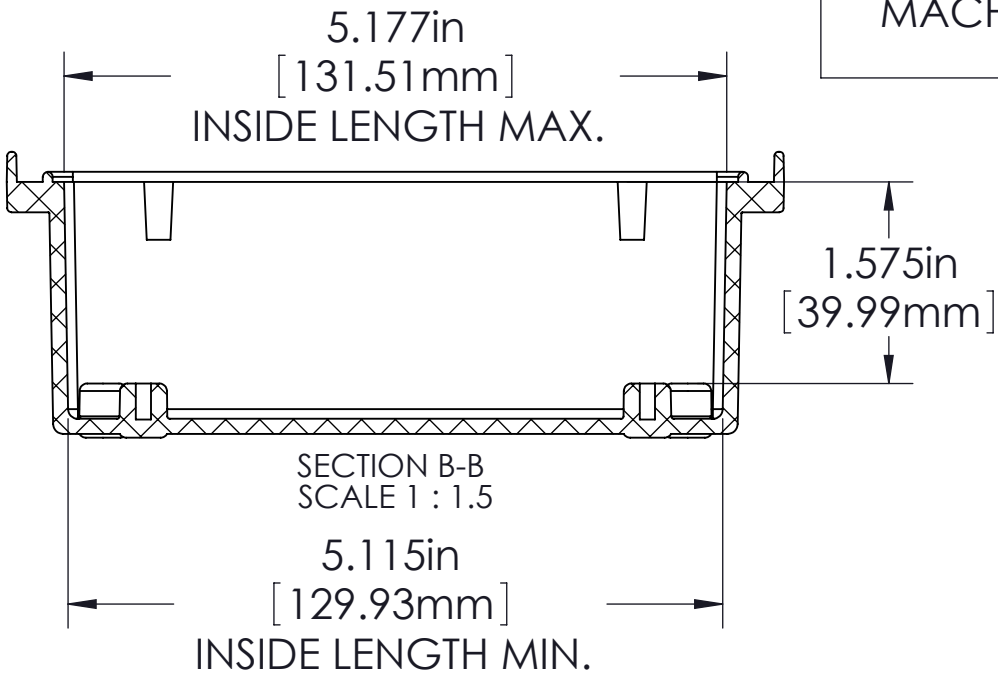


Ø.118in [3.00mm]
FOR M4 x 10mm LG. SELF-TAPPING SCREWS 4 PLCS.

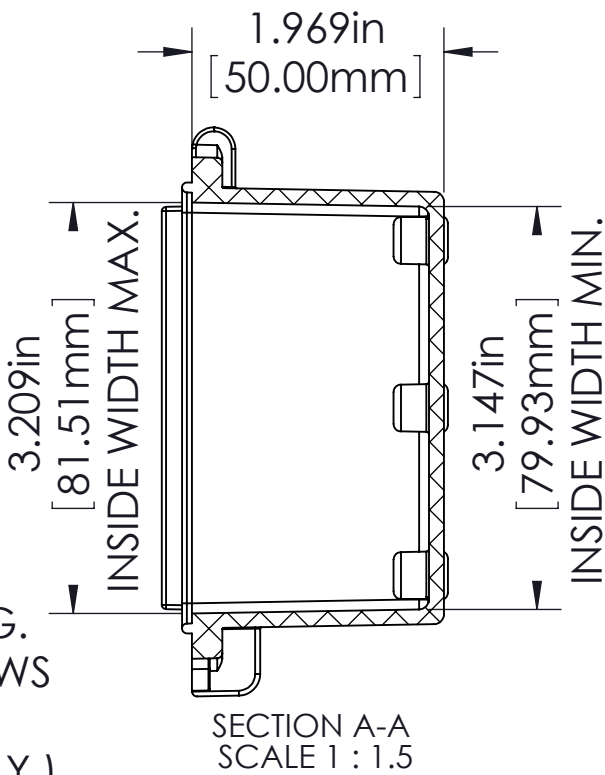

ASSEMBLY

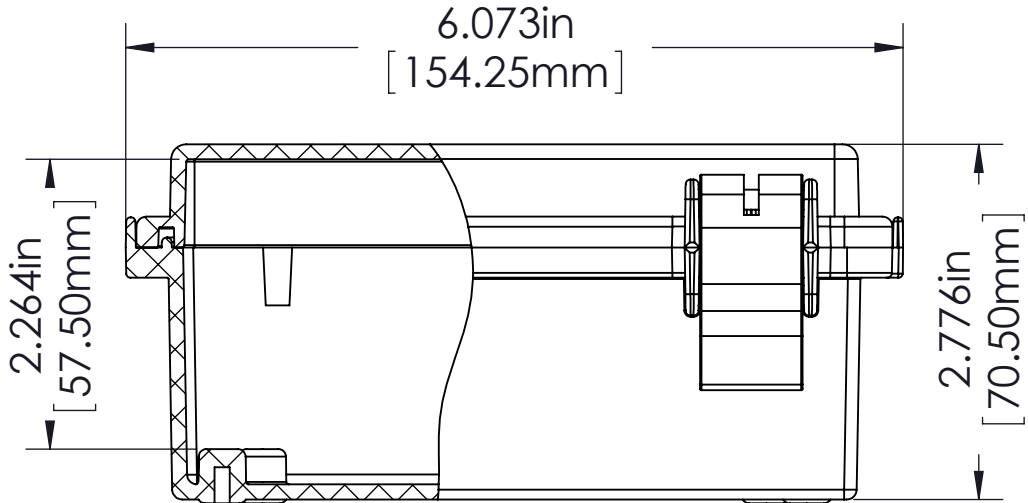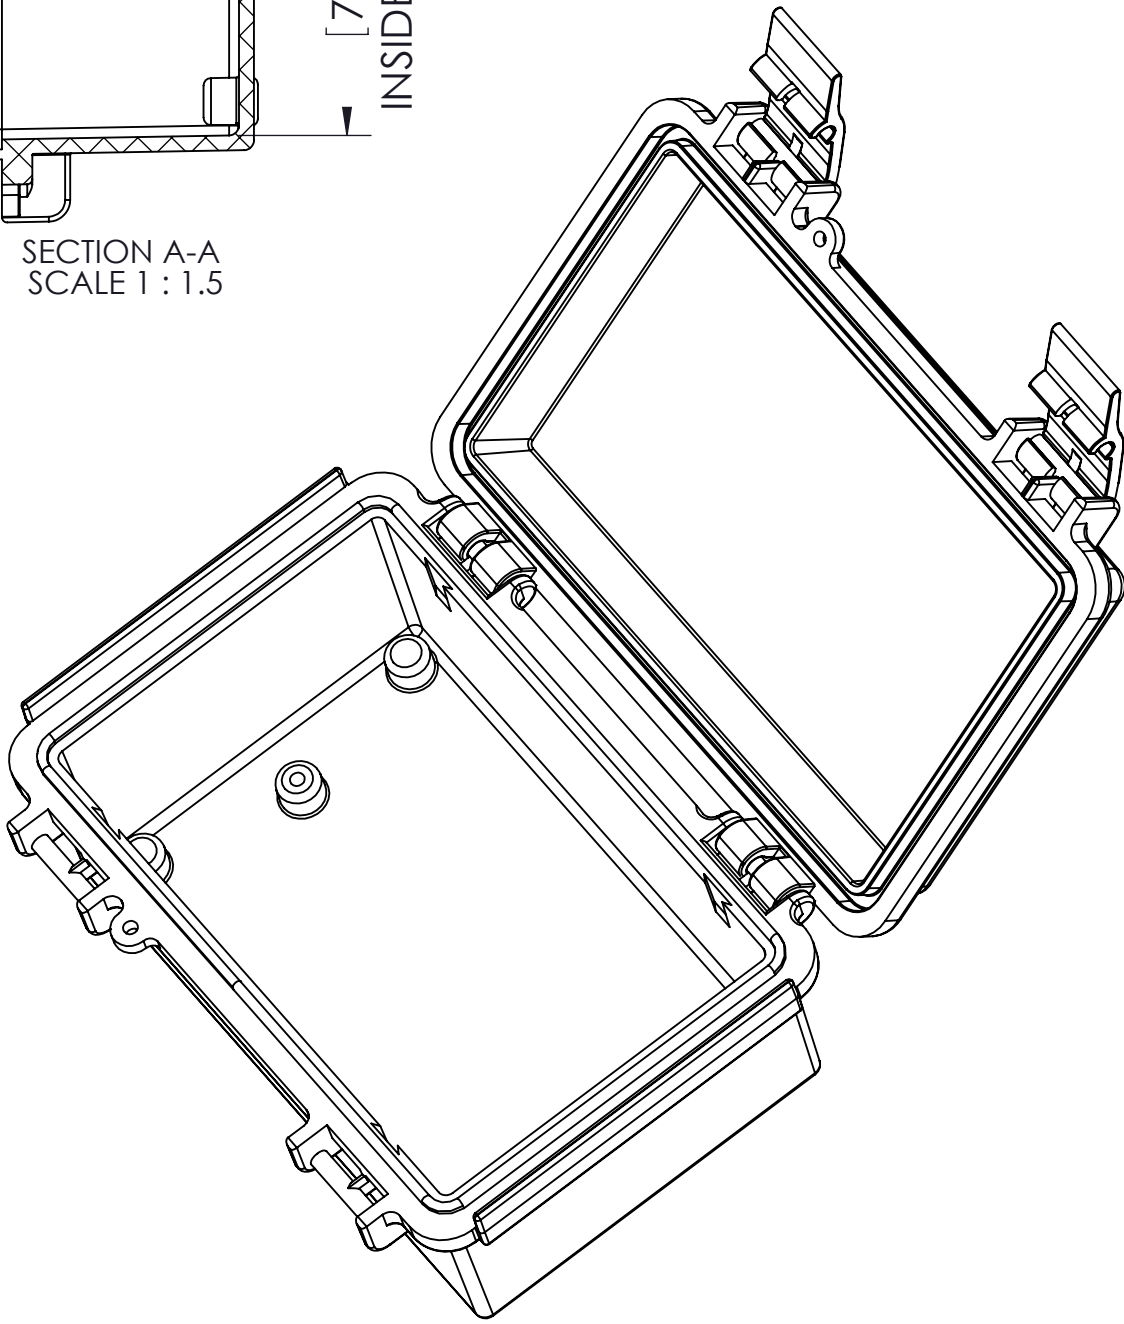

COVER

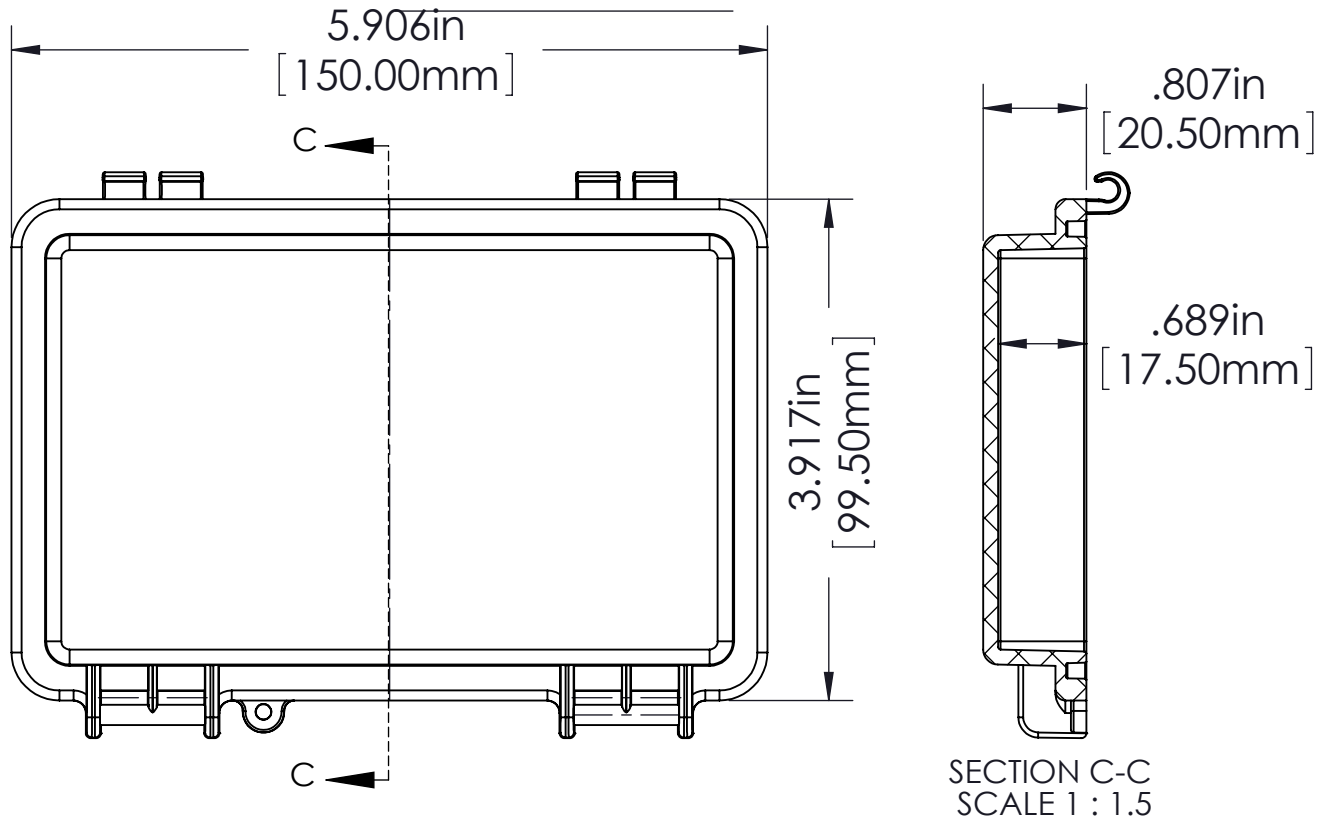

- NOTES:
- 1) UNIT COMES COMPLETE WITH (4) WALL MOUNTING BRACKETS & (4) M4 x 10mm LG. SELF-TAPPING SCREWS. (NOT SHOWN)
 - 2) BOXES DESIGNED TO MEET FOLLOWING STANDARDS: NEMA 1,2,4,4X AND IEC529-IP65 REQUIREMENTS.
- TOLERANCES:
- ALL DIMENSIONS HAVE ±0.039in. [±1mm] TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NO.	MATERIAL		USE
	BODY	COVER	
NBF-32004	ABS	ABS	INDOOR
NBF-32104	ABS / PC	ABS / PC	INDOOR
NBF-32204	ABS / PC	CLEAR PC	INDOOR
NBF-32304	PBT / PC	PBT / PC	OUTDOOR
NBF-32404	PBT / PC	CLEAR PC	OUTDOOR