
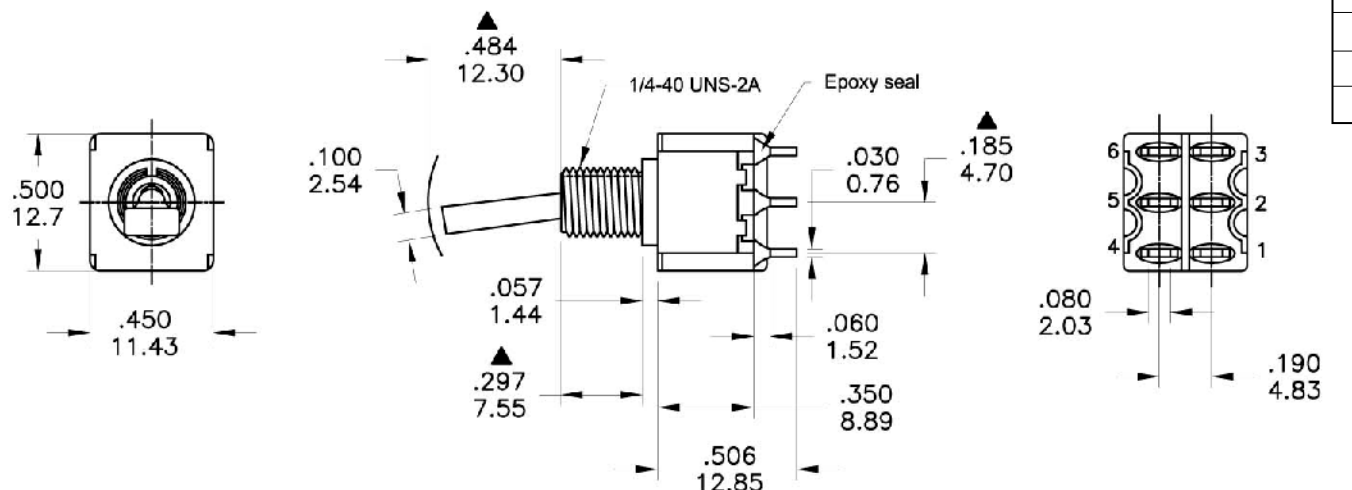


PANEL MOUNTING

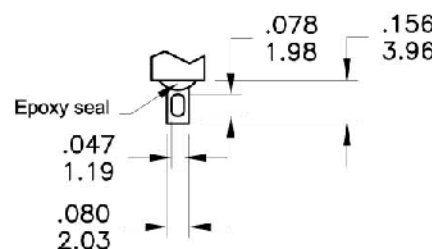

SOLDER LUG

Date	Rev.	Description

Model No.	POS.1	POS.2	POS.3
1MD4	MOM	OFF	MOM
Term. Comm.	2-3,5-6	OPEN	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

SCALE 3 : 2

TOLERANCE

0.00 mm ± 0.25mm

0.0 mm ± 0.40mm

ANGULAR : ± 2.54 mm

FILE NAME : 1MDP0131

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)

Q : 2Amps @250VAC

5Amps @120 VAC or 28 VDC

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000MΩ min.

DIELECTRIC STRENGTH: 1,000 V RMS@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).

ACTUATOR: Brass,chrome plated.

BUSHING: Brass,nickel plated.

HOUSING: Stainless Steel.

TERMINAL/CONTACT: Silver or gold plated.

SWITCH SUPPORT : Brass , Tin plated.

DCC. NO.
A4 DRAWING NO.

MATERIAL		GOLDSUN ELECTRONICS CO., LTD.	
JAMECO NO. 317498		GOLDSUN NO. 1MD4T6B11M1QE	
DRWN: Kiki Chen		Description MINIATURE TOGGLE SWITCHES	
VERIFY PEOPLE: Ada Zheng , Ivy Lan		Rev. 1	
UNIT: mm	SCALE: 3:2	SHEET 1 OF 1	CAS No: ERN No: