

**Inolux Technologies 0.67" 5x7 Dot Matrix Display
HDMT5767 Series**

Official Product	HDMT5767 Series	Customer Part No.		Data Sheet No.
	*****	*****		HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0	Page 1/17

DISCLAIMER.....	3
ORDERABLE INFORMATION.....	4
FEATURES.....	5
SCHEMATIC DRAWING	6
PRODUCT CHARACTERISTIC	7
ABSOLUTE MAXIMUM RATING.....	7
ELECTRICAL AND OPTICAL CHARACTERISTIC.....	8
CHARACTERISTIC CURVES FOR UB	9
CHARACTERISTIC CURVES FOR UTG	10
CHARACTERISTIC CURVES FOR UYG	11
CHARACTERISTIC CURVES FOR UY	12
CHARACTERISTIC CURVES FOR UA.....	13
CHARACTERISTIC CURVES FOR UR.....	14
CHARACTERISTIC CURVES FOR USR	15
REFLOW SOLDERING	16
SOLDERING IRON	16
REWORK	16
REVISION HISTORY.....	17

Official Product	HDMT5767 Series	Customer Part No.		Data Sheet No.
	*****	*****		HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0	Page 2/17

DISCLAIMER

- The information contained herein is presented only as a guide for the applications of our products.

No responsibility is assumed by INOLUX for any infringements of intellectual property or other rights of the third parties which may result from its use.

- Inolux is continually effort to improve the quality of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing INOLUX products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such INOLUX products cause loss of human life, bodily injury or damage to property.
- The INOLUX products listed in this document are intended for usage in general electronics (computer, personal equipment, office equipment, industrial robotics, domestic, etc...) These products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury.
- In developing your designs, please ensure that INOLUX products are used within specified operating ranges as set forth in the most recent INOLUX products specifications.
- Also, please keep in mind the precautions listed in this document.

Official Product	HDMT5767 Series	Customer Part No.		Data Sheet No.
	*****	*****		HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0	Page 3/17

Orderable Information


H D M T 5 7 6 7 X X X - X X X X

Series Name	Matrix Type	Matrix Height	Color Code	Polarity	Customer Code
HDMT H: Inolux Technologies DMT: Dot Matrix	57: 5x7 Dot Matrix Display	67: 0.67" Matrix Height	UB: 470nm InGaN Blue UTG: 525nm InGaN True Green UYG: 570nm AlInGaP Yellow Green UY: 590nm AlInGaP Yellow UA: 606nm AlInGaP Amber UR: 625nm AlInGaP Hyper Red USR: 639nm AlInGaP Super Red	A: Anode Column Cathode Row C: Cathode Column Anode Row	XXXX: Customer specific code

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0
			Page 4/17

Features



- 0.67" (17.14mm) Matrix Height
- 5x7 Array Type
- Gray Face , White Segment
- RoHS Compliant, Pb Free

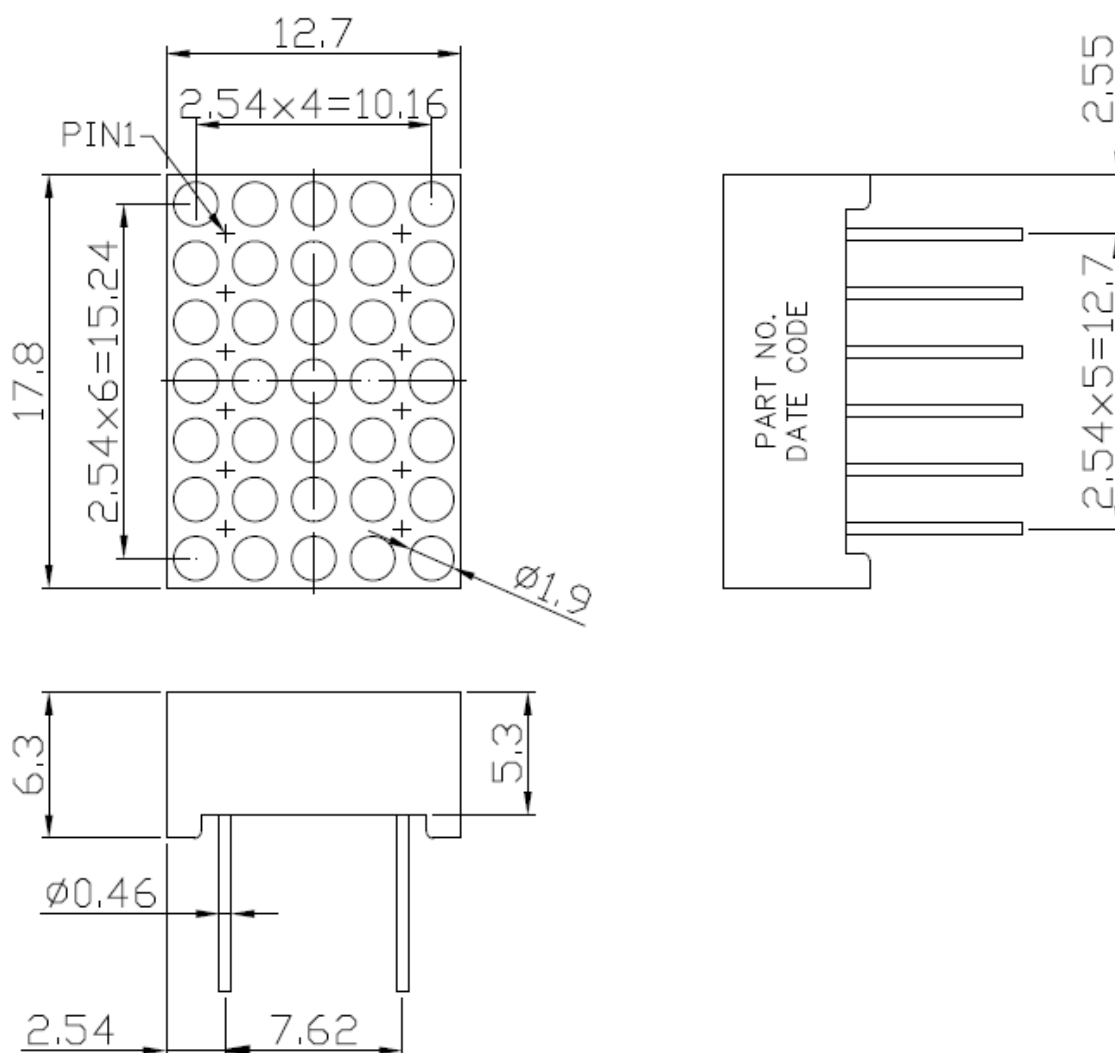

Note: Dimension is in millimeters. Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted.

Official Product	HDMT5767 Series	Customer Part No.		Data Sheet No.
	*****	*****		HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0	Page 5/17

Schematic Drawing

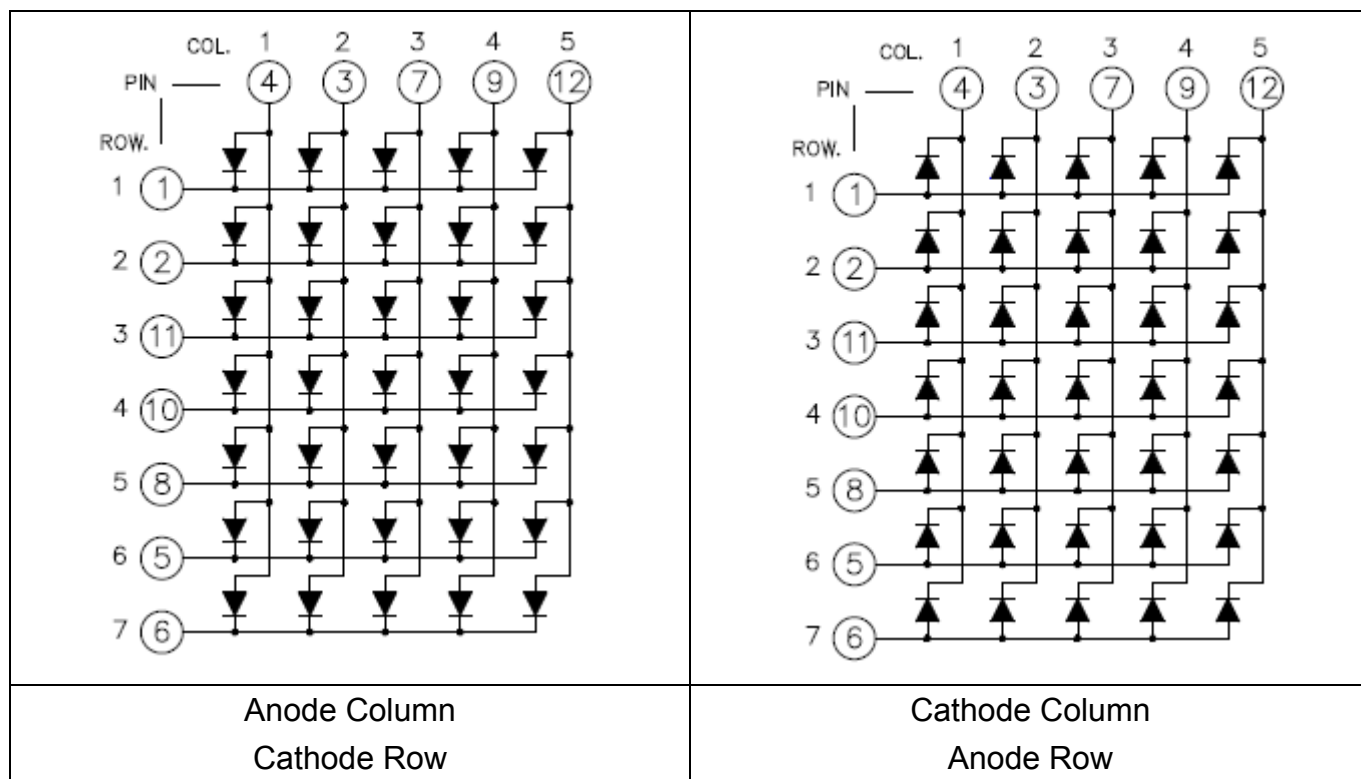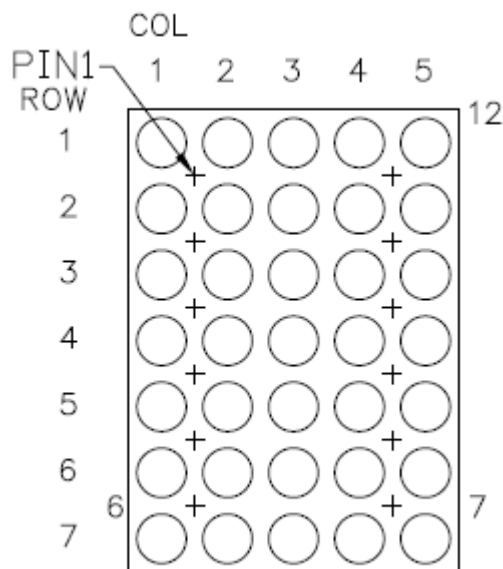

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0
			Page 6/17

Product Characteristic

Absolute Maximum Rating

(T_a = 25°C)

Product	Emission Color	P _{AD} (mW)	I _{AF} (mA)	I _{PF} (mA)	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	Derate From 25°C (mA/°C)
HDMT5767UBA/ HDMT5767UBC	Blue	120	30	100	5	-25 ~ +85	-25 ~ +85	0.4
HDMT5767UTGA/ HDMT5767UTGC	True Green	120	30	100	5	-25 ~ +85	-25 ~ +85	0.3
HDMT5767UYGA/ HDMT5767UYGC	Yellow Green	85	30	120	5	-25 ~ +85	-25 ~ +85	0.42
HDMT5767UYA/ HDMT5767UYC	Yellow	70	25	90	5	-25 ~ +85	-25 ~ +85	0.28
HDMT5767UAA/ HDMT5767UAC	Amber	70	25	90	5	-25 ~ +85	+25 ~ +85	0.33
HDMT5767URA/ HDMT5767URC	Hyper Red	70	25	90	5	-25 ~ +85	-25 ~ +85	0.33
HDMT5767USRA/ HDMT5767USRC	Super Red	70	25	90	5	-25 ~ +85	-25 ~ +85	0.33

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0
			Page 7/17

Electrical and Optical Characteristic
 $(T_a = 25^{\circ}\text{C})$

Product	Emission Color	I _F (mA)	V _F (V)		λ (nm)		I _V (mcd)	I _R (μA)
			Typ.	Max.	λ _d	Δλ	Typ.	Max
HDMT5767UBA/ HDMT5767UBC	Blue	20	3.2	4.0	470	30	60	10 (V _R =8V)
HDMT5767UTGA/ HDMT5767UTGC	True Green	20	3.2	4.0	525	30	140	10 (V _R =8V)
HDMT5767UYGA/ HDMT5767UYGC	Yellow Green	20	2.1	2.6	571	20	20	10 (V _R =5V)
HDMT5767UYA/ HDMT5767UYC	Yellow	20	2.0	2.6	590	20	40	10 (V _R =5V)
HDMT5767UAA/ HDMT5767UAC	Amber	20	2.0	2.6	606	35	40	10 (V _R =5V)
HDMT5767URA/ HDMT5767URC	Hyper Red	20	2.0	2.6	625	20	40	10 (V _R =5V)
HDMT5767USRA/ HDMT5767USRC	Super Red	20	2.0	2.6	639	20	30	10 (V _R =5V)

Luminous Intensity tolerance = +/- 15%

Official Product	HDMT5767 Series	Customer Part No.		Data Sheet No.
	*****	*****		HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0	Page 8/17

Characteristic Curves for UB

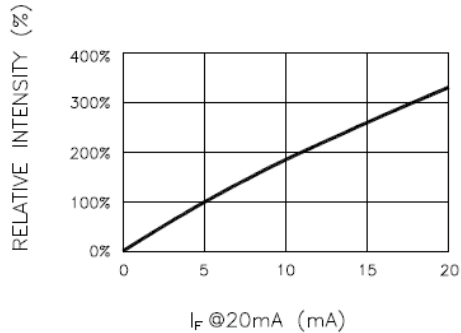


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

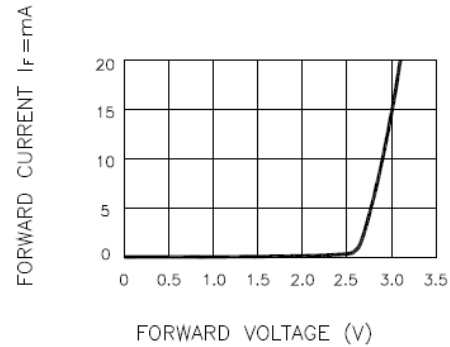


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

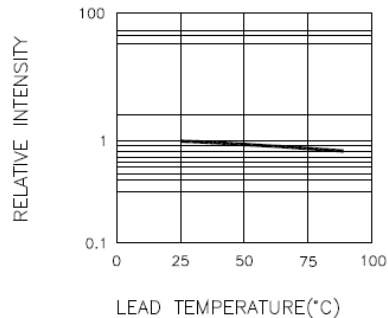


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

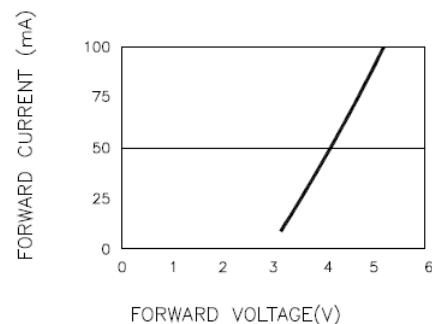


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD
(100us TEST PULSE, 1% DUTY CYCLE)

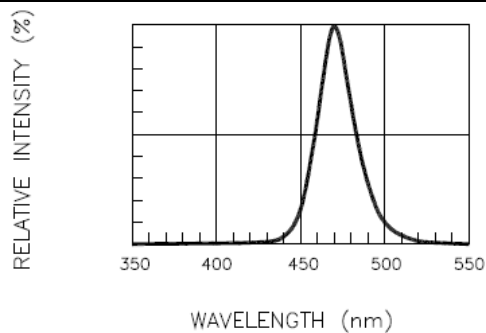


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

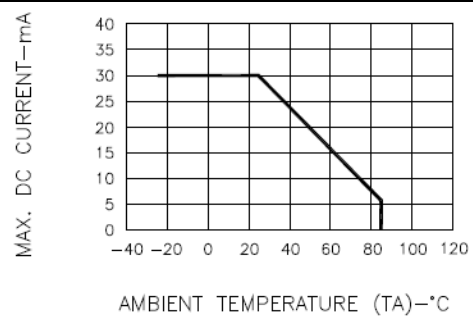


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0
			Page 9/17

Characteristic Curves for UTG

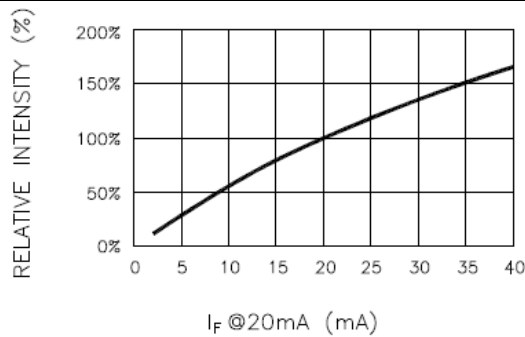


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

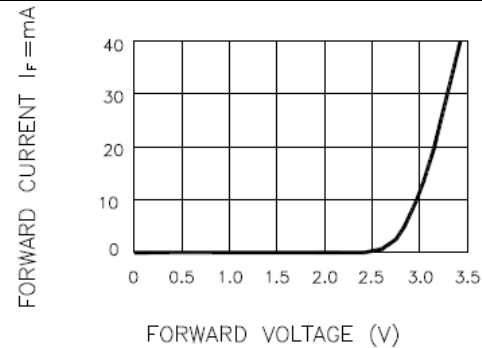


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

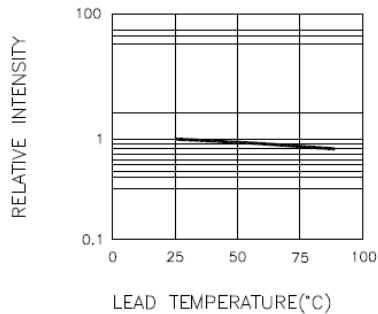


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

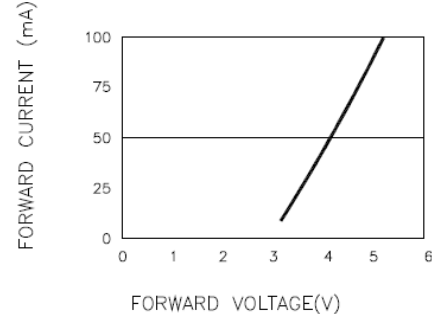


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD CURRENT
(100us TEST PULSE, 1% DUTY CYCLE)

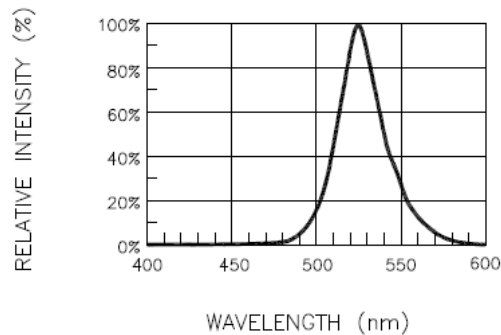


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

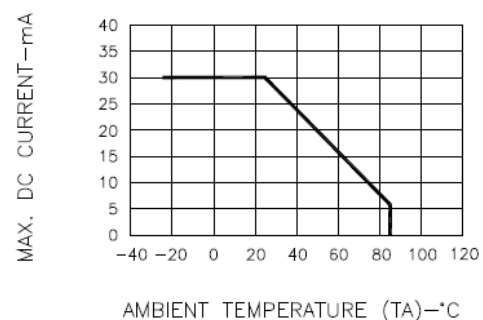


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Page 10/17

Characteristic Curves for UYG

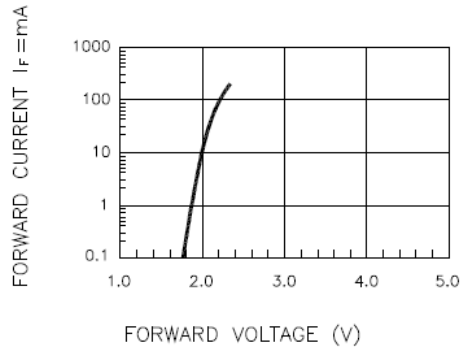


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

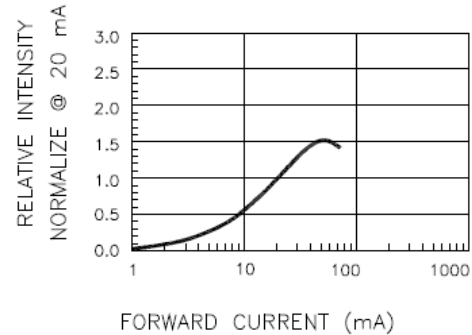


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

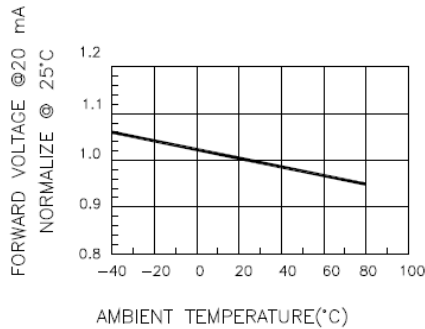


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

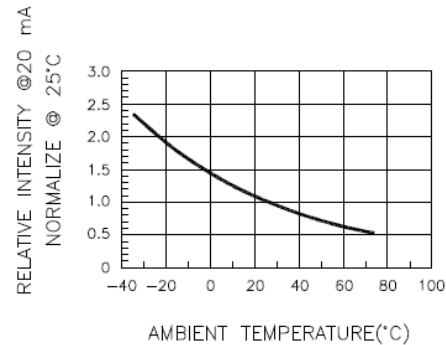


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

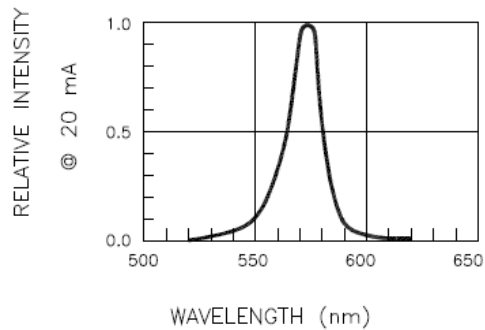


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

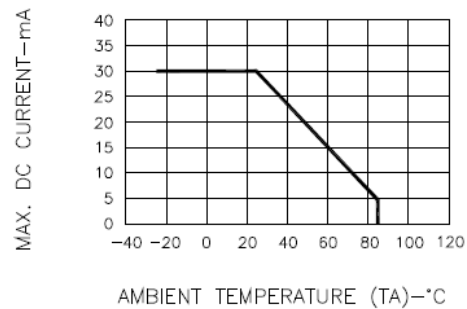


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Page 11/17

Characteristic Curves for UY

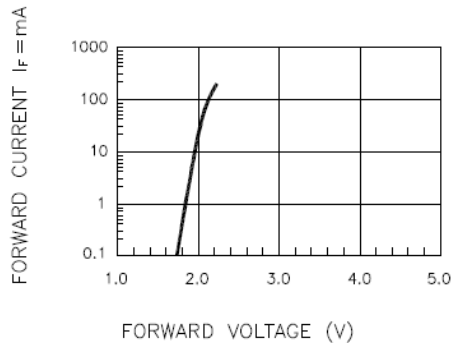


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

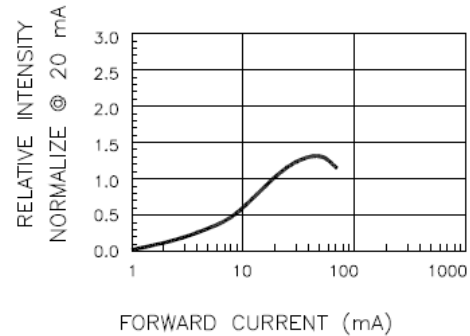


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

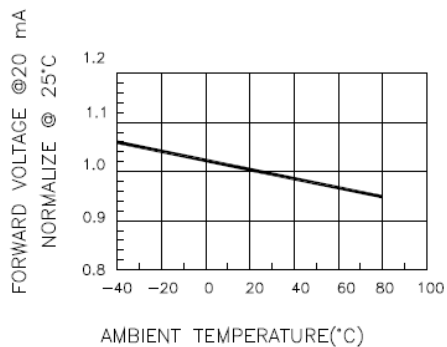


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

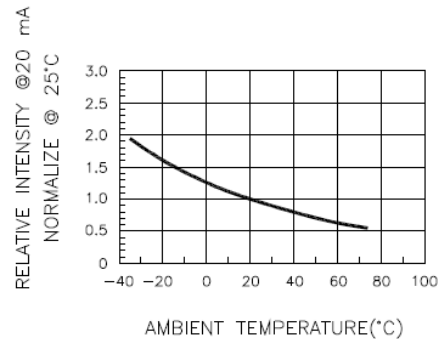


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

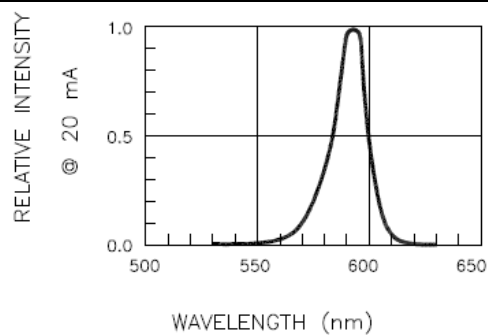


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

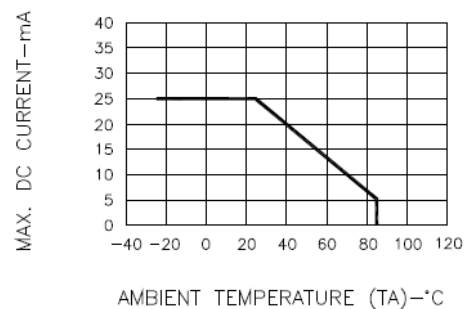


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0
			Page 12/17

Characteristic Curves for UA

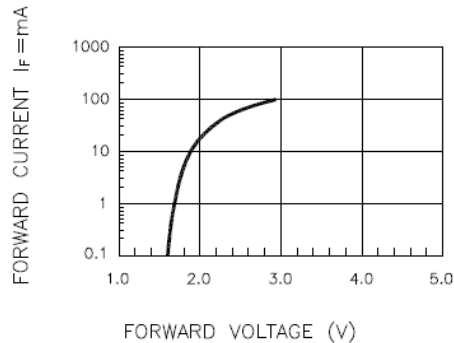


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

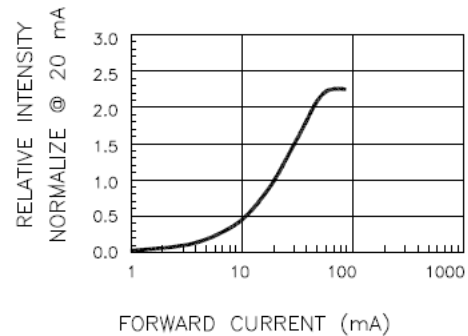


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

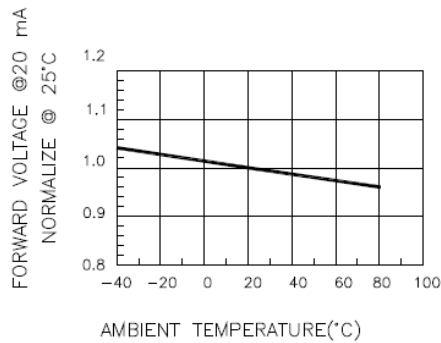


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

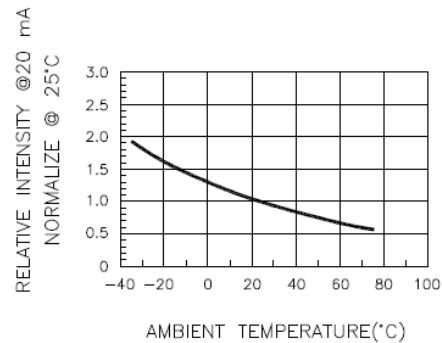


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

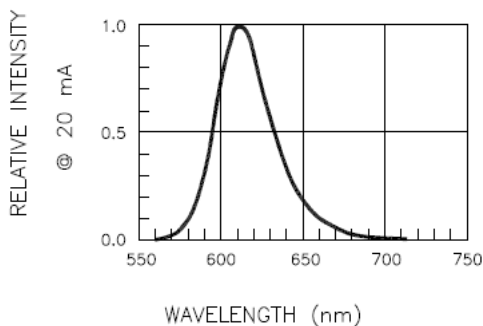


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

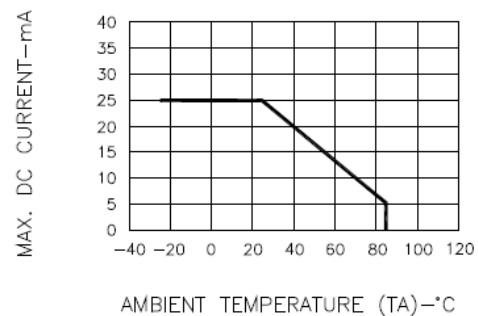


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Page 13/17

Characteristic Curves for UR

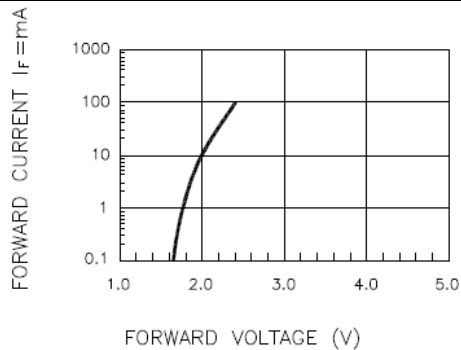


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

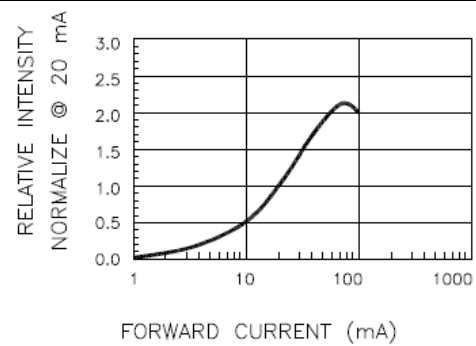


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

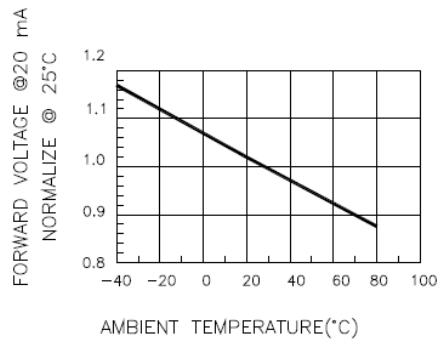


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

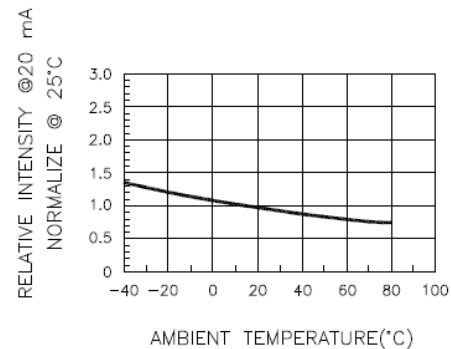


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

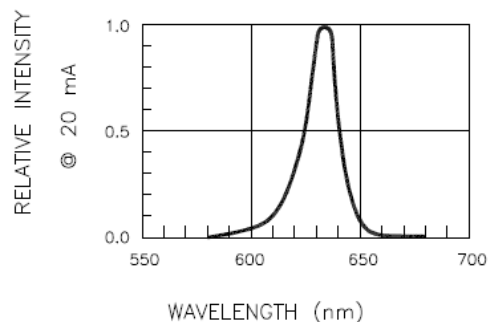


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

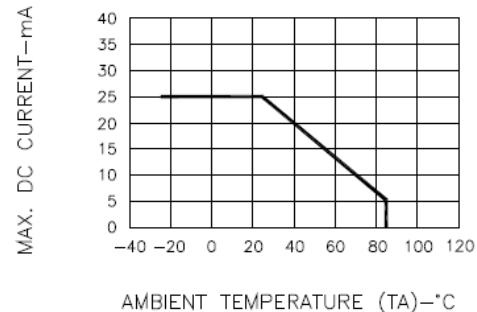


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Page 14/17

Characteristic Curves for USR

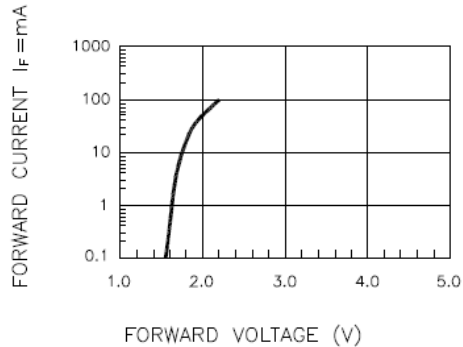


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

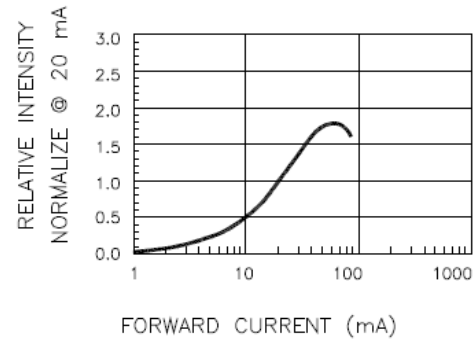


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

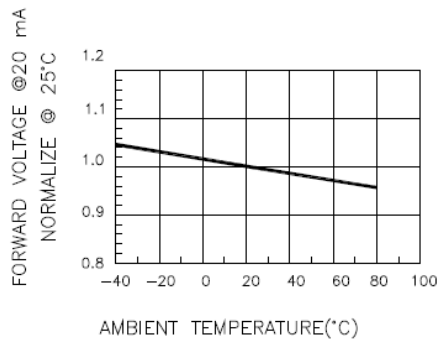


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

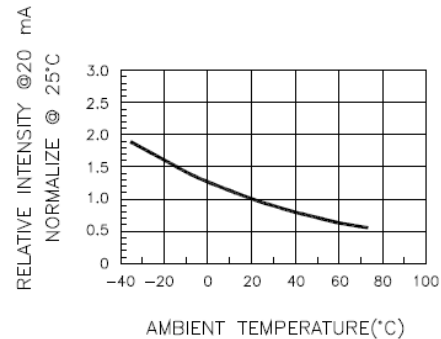


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

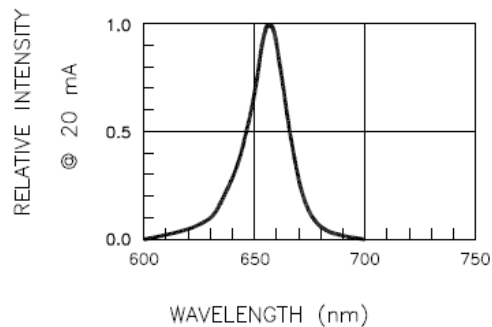


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


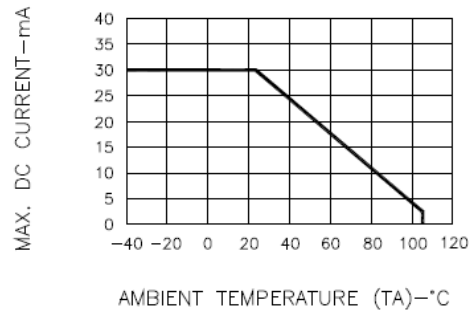


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Page 15/17

Reflow Soldering

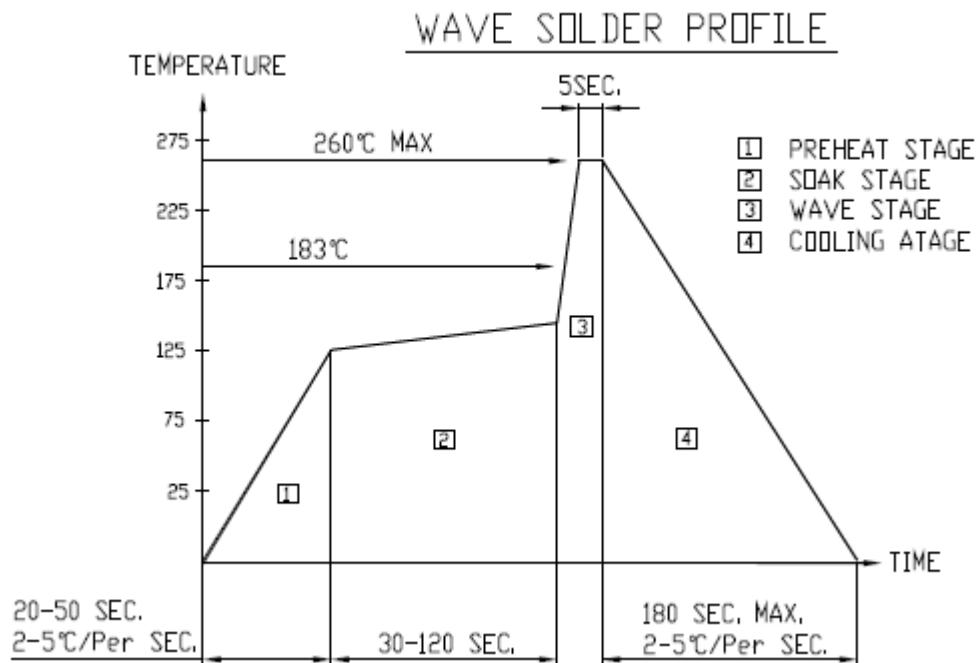

Soldering Iron

Basic Spec is ≤ 4 sec. when 260°C (+10°C $\rightarrow$ -1 second). Power dissipation of Iron should be less than 15W. Surface temperature should be under 230°C

Rework

Rework should be completed within 4 second under 245°C

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0
			Page 16/17

Revision History

Changes since last revision	Page	Version No.	Revision Date
Initial Release for HDMT5767		1.0	05-08-2013

Official Product	HDMT5767 Series	Customer Part No.	Data Sheet No.
	*****	*****	HDMT5767 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 08, 2013	Version of 1.0
			Page 17/17