

Overview

KEMET's M550 and M551 Modular Series are manufactured by placing T550 or T551 Polymer Hermetic Sealed Capacitors (PHS) in parallel. The T550 and T551 Series are manufactured utilizing KEMET's exclusive F-TECH Process and are 100% tested per KEMET's patented Simulated Breakdown Screening Process. This configuration provides high and stable capacitance (up to 8,200 μF), extremely low ESR (down to 15m Ω) and extremely low and stable leakage current, all in a mechanically robust package.

The M55 Modules are available in two temperature offerings: 105°C (M550 Series) and 125°C (M551 Series). With reduced ESR and enhanced capacitance retention at higher frequencies and low temperatures, KEMET modules provide the highest total capacitance and the lowest total cost of ownership for high power applications.

Benefits

- Extremely low and stable ESR (as low as 15 m Ω)
- High frequency capacitance retention
- Low temperature capacitance stability
- High ripple current capability (17,500 mA_{rms})
- High inrush current capability
- Excellent power dissipation capability
- Stackable packaging
- Mechanically robust assembly and epoxy housing
- Operates at up to 80% rated voltage
- Customized solutions available
- RoHS compliant terminations available



Applications

Designed for Defense and Aerospace applications requiring high power, filtering, hold-up and current pulse generation.

Ordering Information

M	550	B	108	M	060	A	A
Capacitor Class	Series	Case Size	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage (VDC)	Product Level	Termination Finish
M = Module	550= Capacitor Series (PHS 105°C) 551= Capacitor Series (PHS 125°C)	B	First two digits represent significant figures. Third digit specifies number of zeros.	K = $\pm 10\%$ M = $\pm 20\%$	006 = 6 008 = 8 010 = 10 015 = 15 025 = 25 030 = 30 040 = 40 050 = 50 060 = 60 075 = 75 100 = 100	A = N/A B* = DLA 13030 Standard reliability T* = DLA 13030 High reliability	A=100% Silver(Ag) T = 100% tin (Sn) plated H = Tin/lead (SnPb) solder coated (5% Pb minimum) S = Solder-coated (60% Sn, 40%Pb) G=100% Gold (Au)

* Only available on DLA discrete part numbers. Refer to part number table for details.

Performance Characteristics


Item	Performance Characteristics
Operating Temperature	-55°C to 105°C/125°C *
Rated Capacitance Range	250 μ F to 8,200 μ F at 120 Hz/25°C
Capacitance Tolerance	K Tolerance (10%), M Tolerance (20%)
Rated Voltage Range	6 – 100 V
DF (120 Hz at 25°C)	Refer to Part Number Electrical Specification Table
ESR (100 kHz at 25°C)	Refer to Part Number Electrical Specification Table
Leakage Current	≤ 0.0075 CV (μ A) at rated voltage after 5 minutes

* Refer to the part number specification table

Qualification

Test Performed	Method Reference	Test Conditions
Reliability and Environmental Tests		
AC Ripple Life at 85°C, 0.67 V _r	MIL-PRF-39006	85°C, 40 kHz ripple current, 2,000 hours
Thermal Shock	MIL-PRF-39006	Condition A, -55°C to +105°C 5 cycles
Temperature Stability	MIL-PRF-39006	Extreme temperature exposure at a succession of continuous steps at +25°C, -55°C, +25°C, +85°C, +105, +25°C
Physical, Mechanical and Process Tests		
Mechanical Shock	KEMET Custom Test	Condition I
Vibration High Frequency	MIL-PRF-39006	Method 204, Test condition D, 20 g peak

Dimensions – Millimeters (Inches)

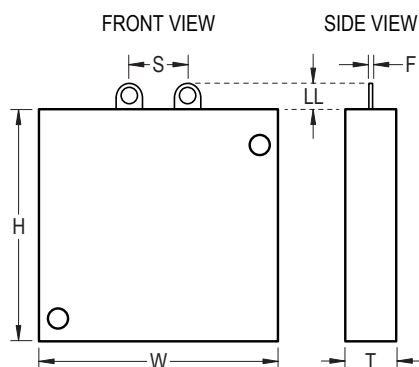

Dimensions							Weight
Module Frame Size	H ±0.38 (0.015)	T ±0.20 (0.008)	W ±0.38 (0.015)	LL	S	F ref	per module (g)
1	50.6 (1.99)	11.1 (0.44)	52.1 (2.05)	5.6 (0.22)	12.71 (0.50)	0.81	80

Table 1 – Ratings & Part Number Reference

Rated Voltage	Rated Capacitance	KEMET Module Part Number	DC Leakage	DF	Maximum ESR	Ripple Current	Maximum Operating Temperature
VDC at 85°C	µF	(See below for part options)	µA at 25°C Maximum/5 Minutes	% at 25°C 120 Hz Max	mΩ at 25°C 100 kHz	mArms at 85°C/40 kHz	°C
6	8200	M550B828(1)006A(3)	369	5	15	17500	105
6	8200	M551B828(1)006A(3)	369	5	15	17500	125
8	6800	M550B688(1)008A(3)	408	5	15	17500	105
8	6800	M551B688(1)008A(3)	408	5	15	17500	125
10	5600	M550B568(1)010A(3)	420	5	15	17500	105
10	5600	M551B568(1)010A(3)	420	5	15	17500	125
15	3900	M550B398(1)015A(3)	439	5	15	17500	105
15	3900	M551B398(1)015A(3)	439	5	15	17500	125
25	1000	M550B108(1)025(2)(3)*	188	5	30	12000	105
25	1000	M551B108(1)025A(3)	188	5	30	12000	125
30	680	M550B687(1)030A(3)	153	5	25	14000	105
30	680	M551B687(1)030A(3)	153	5	25	14000	125
40	1000	M550B108(1)040(2)(3)*	300	5	25	13500	105
40	1000	M551B108(1)040A(3)	300	5	25	13500	125
40	1200	M550B128(1)040(2)(3)*	360	5	20	15100	105
40	1200	M551B128(1)040A(3)	360	5	20	15100	125
50	1000	M550B108(1)050(2)(3)*	375	5	20	14500	105
50	1000	M551B108(1)050A(3)	375	5	20	14500	125
50	1200	M550B128(1)050(2)(3)*	450	5	15	17500	105
50	1200	M551B128(1)050A(3)	450	5	15	17500	125
60	1000	M550B108(1)060(2)(3)*	450	5	25	16600	105
60	1000	M551B108(1)060A(3)	450	5	25	16600	125
75	750	M550B757(1)075(2)(3)*	422	5	20	15800	105
100	250	M550B257(1)100(2)(3)*	188	5	30	12750	105

Additional values available please contact your KEMET sales representative

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.


(2) To complete KEMET part number, insert B = standard reliability, or T = high reliability. See Ordering Information table for details.

(3) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, H = Standard Solder coated (SnPb 5% Pb minimum), S = 60% Tin (Sn) 40% Lead (Pb), G = 100% Gold (Au), A = 100% Silver (Ag). Designates termination finish.

* Screened discrete component DLA qualified.

Recommended Voltage Derating Guidelines

	-55°C to 105°C	105°C to 125°C
% Change in Working DC Voltage with Temperature	78% of V_R	66% of V_R
Recommended Maximum Application Voltage (As % of Rated Voltage)	63% of V_R	54% of V_R

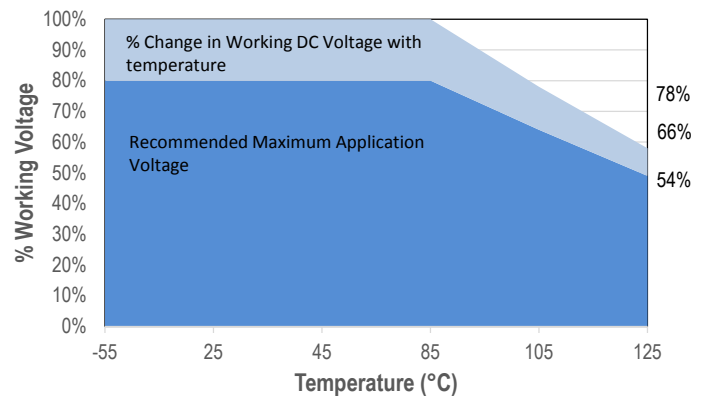

Ripple Current/Ripple Voltage

Permissible AC ripple voltage and current are related to equivalent series resistance (ESR) and the power dissipation capabilities of the device. Permissible AC ripple voltage that may be applied is limited by two criteria:

1. The positive peak AC voltage plus the DC bias voltage, if any, must not exceed the DC voltage rating of the capacitor.
2. The negative peak AC voltage in combination with bias voltage, if any, must not exceed the allowable limits specified for reverse voltage.

The maximum power dissipation by case size can be determined using the below left table. The maximum power dissipation rating stated in the table must be reduced with increasing environmental operating temperatures. Refer to the below right table for temperature compensation requirements.

Case Code		Maximum Power Dissipation (P_{max}) mWatts at 25°C with +60°C Rise
KEMET	MIL-PRF-39006/22/ 25/30/31 Case Size	
B	T2	715

Temperature Compensation Multipliers for Maximum Power Dissipation (P_{max})		
$T \leq 45^\circ\text{C}$	$45^\circ\text{C} < T \leq 85^\circ\text{C}$	$85^\circ\text{C} < T \leq 125^\circ\text{C}$
1.00	0.50	0.10

T = Environmental Temperature

Using the P_{max} of the device, the maximum allowable rms ripple current or voltage may be determined.

$$I(max) = \sqrt{P_{max}/R}$$

$$E(max) = Z \sqrt{P_{max}/R}$$

I = rms ripple current (amperes)

E = rms ripple voltage (volts)

P_{max} = maximum power dissipation (watts)

R = ESR at specified frequency (ohms)

Z = Impedance at specified frequency (ohms)

The maximum power dissipation rating must be reduced with increasing environmental operating temperatures. Refer to the Temperature Compensation Multiplier table for details.

Reverse Voltage

Solid tantalum polymer capacitors are polar devices and may be permanently damaged or destroyed if connected with the wrong polarity. A small reverse voltage is permissible for time periods per the below table. KEMET can offer lower capacitance in this voltage with higher reverse voltage capability. In addition, we continue to improve our capability for this characteristic.


Temperature	Permissible Reverse Voltage
25°C	1 V for 8 hours Maximum
70°C	1 V for 2 hours Maximum

Mounting

The Modules Series M550 and M551 are suitable for stacking to the board. The use of a heat sink is recommended.

Modules Series are not suitable for reflow soldering. For manual-soldering process with soldering iron, the maximum recommended temperature is 350°C for no more than 3 seconds. Care should be taken to avoid contact of the soldering iron to the epoxy housing. The iron should be used to heat the solder pad, applying solder between the pad and the terminal of the module, until reflow occurs.

Capacitor Marking

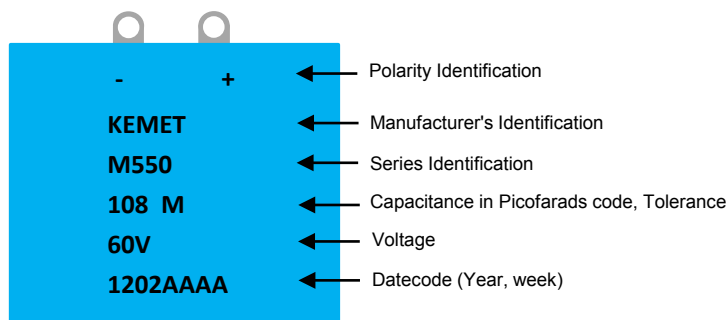

Storage

Polymer Hermetic Seal Modules should be stored in normal working environments. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 90% RH. For optimal solderability, module stock should be used promptly, preferably within three years of receipt.

Packaging

Modules shall be packaged in carton boxes. Packaging methods and materials used shall prevent degradation of physical and mechanical characteristics. MSL 1

Series	Carton Box Qty
M55	10 max

KEMET Corporation World Headquarters

2835 KEMET Way
Simpsonville, SC 29681

Mailing Address:
P.O. Box 5928
Greenville, SC 29606

www.kemet.com
Tel: 864-963-6300
Fax: 864-963-6521

Corporate Offices
Fort Lauderdale, FL
Tel: 954-766-2800

North America

Southeast

Lake Mary, FL
Tel: 407-855-8886

Northeast

Wilmington, MA
Tel: 978-658-1663

Central

Novi, MI
Tel: 248-994-1030

West

Milpitas, CA
Tel: 408-433-9950

Mexico

Guadalajara, Jalisco
Tel: 52-33-3123-2141

Europe

Southern Europe

Sasso Marconi, Italy
Tel: 39-051-939111

Skopje, Macedonia
Tel: 389-2-55-14-623

Central Europe

Landsberg, Germany
Tel: 49-8191-3350800

Kamen, Germany
Tel: 49-2307-438110

Northern Europe

Wyboston, United Kingdom
Tel: 44-1480-273082

Espoo, Finland
Tel: 358-9-5406-5000

Asia

Northeast Asia

Hong Kong
Tel: 852-2305-1168

Shenzhen, China
Tel: 86-755-2518-1306

Beijing, China
Tel: 86-10-5877-1075

Shanghai, China
Tel: 86-21-6447-0707

Seoul, South Korea
Tel: 82-2-6294-0550

Taipei, Taiwan
Tel: 886-2-27528585

Southeast Asia

Singapore
Tel: 65-6701-8033

Penang, Malaysia
Tel: 60-4-6430200

Bangalore, India
Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kemet:

M550B757K075AH	M550B828K006AS	M550B128M050AA	M550B108M060AG	M550B108K050AS
M550B108M050AG	M550B757K075AG	M550B757K075AA	M550B128M040AG	M550B828M006AS
M550B108K050AA	M550B687K030AS	M550B688K008AH	M550B108K025AT	M550B398M015AG
M550B687K030AH	M550B108K025AH	M550B128K050AH	M550B128M040AA	M550B687K030AA
M550B128M040AH	M550B398K015AH	M550B257M100AS	M550B257M100AG	M550B108M025AH
M550B108M040AS	M550B568K010AS	M550B398M015AS	M550B108K060AH	M550B757M075AT
M550B688M008AH	M550B108M025AS	M550B687M030AA	M550B128K050AG	M550B398K015AS
M550B568K010AT	M550B828M006AG	M550B687K030AT	M550B128K050AS	M550B128K050AT
M550B257M100AA	M550B108M040AG	M550B687M030AT	M550B687M030AS	M550B108K060AS
M550B828M006AA	M550B687M030AH	M550B257M100AT	M550B108M060AH	M550B108K025AG
M550B128M050AG	M550B108K060AA	M550B828M006AH	M550B568K010AG	M550B257K100AS
M550B128K050AA	M550B108K050AG	M550B688M008AG	M550B108K050AH	M550B568M010AH
M550B128K040AS	M550B688K008AS	M550B687K030AG	M550B398K015AA	M550B828K006AG
M550B108K060AT	M550B688K008AG	M550B108M025AG	M550B398M015AT	M550B568M010AG
M550B688M008AT	M550B398K015AT	M550B108K025AA	M550B257K100AG	M550B257K100AH
M550B108M025AA	M550B128M050AS	M550B568M010AT	M550B108K025AS	M550B108K040AT
M550B257K100AA	M550B128K040AG	M550B128M050AT	M550B688M008AS	M550B688M008AA
M550B108M040AA	M550B128M040AS	M550B108M060AA	M550B757M075AH	M550B757M075AG
M550B688K008AA	M550B108M050AH	M550B108M060AT	M550B828K006AH	M550B108K040AH
M550B828M006AT	M550B108K050AT	M550B108M050AS	M550B128M050AH	M550B757M075AS