


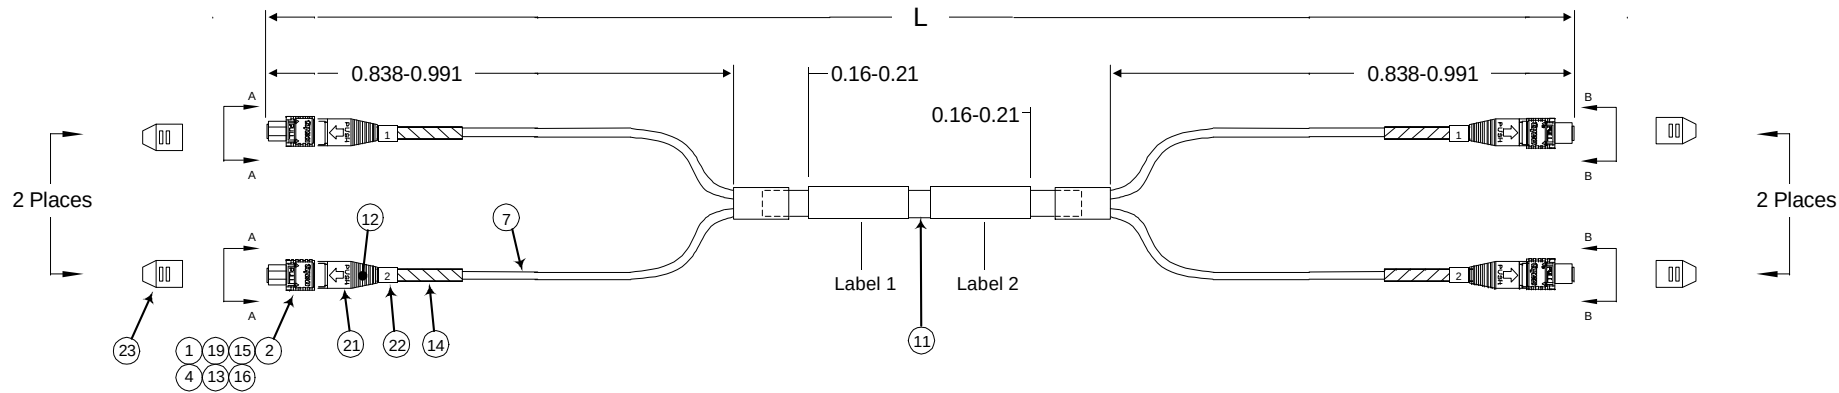

Left Side

Connector(s): MPO SECURE (No Pins)

Mode: MM

Housing Color: Slate

Geom. Spec: N/A

Right Side

Connector(s): MPO SECURE (No Pins)

Mode: MM

Housing Color: Slate

Geom. Spec: N/A


Notes:

- 1 IL tested at 1300nm.
- 2 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
- 3 A copy of test data will be placed inside or with the unit package.
- 4 Label 2 will not be present on any cable assembly less than 5 meters long.
- 5 The cable meets or exceeds the requirements of GR-409-CORE for both RISER and PLENUM applications.
- 6 The cable meets or exceeds the UL requirements for both RISER and PLENUM applications.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. IT IS NOT TO BE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

CAC Customer Layout Rev: D



DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
meters	
1 P.L.C.	± .
2 P.L.C.	± .
3 P.L.C.	± .
4 P.L.C.	± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	HEAT TREAT
OK	Joe Davis		
APVD	Joe Davis		
NAME	FO C/A - 24 fiber, 50/125, OFNR-OFNP, MPO SECURE (No Pins) to MPO SECURE (No Pins)		
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 1918764	1 of 5
			REV
			A


AMP Tyco Electronics, Inc.
Harrisburg, PA 17105-3608

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT MAY NOT BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.


LOC
CE
DIST
16

CAC Customer Layout Rev: D

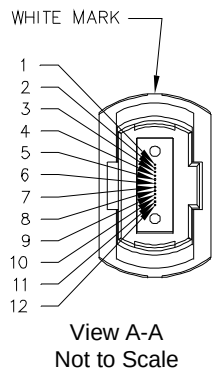


Pairs Flipped

A-A Fiber Color	Connector Position #	B-B Fiber Color
Blue	1	Orange
Orange	2	Blue
Green	3	Brown
Brown	4	Green
Slate	5	White
White	6	Slate
Red	7	Black
Black	8	Red
Yellow	9	Violet
Violet	10	Yellow
Rose	11	Aqua
Aqua	12	Rose

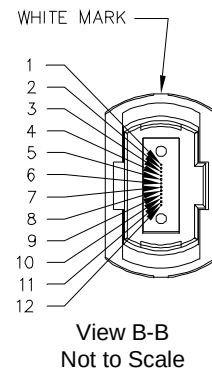

Lightray Connector Fiber Path

Leg 1 ——— 1 Leg
Leg 2 ——— 2 Leg



DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
millimeters	
9 P.L.C.	± .
1 P.L.C.	± .
2 P.L.C.	± .
3 P.L.C.	± .
4 P.L.C.	± .

Restricted To:

DIN Cable Assy Configurator		MATERIAL -	HEAT TREAT -	
CHK Joe Davis	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD Joe Davis				
NAME FO C/A - 24 fiber, 50/125, OFNR-OFNP, MPO SECURE (No Pins) to MPO SECURE (No Pins)				
SCALE NTS	SIZE A2	DRAWING NO C- 1918764	SHEET 2 of 5	REV A

ON 5/10/02

THIS DRAWING IS A CONTROLLED DOCUMENT.

LOC
CE
DIST
16

CAC Customer Layout Rev: D

Part #	L (meters)	L (feet)	MPO SECURE (No Pins), Slate		MPO SECURE (No Pins), Slate	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1918764-1	3.048 - 3.353	10.00 - 11.00	0.75	-	0.75	-
0-1918764-2	6.096 - 6.706	20.00 - 22.00	0.76	-	0.76	-
0-1918764-3	9.144 - 9.754	30.00 - 32.00	0.76	-	0.76	-
0-1918764-4	12.192 - 12.802	40.00 - 42.00	0.77	-	0.77	-
0-1918764-5	15.240 - 15.850	50.00 - 52.00	0.77	-	0.77	-
0-1918764-6	18.288 - 18.898	60.00 - 62.00	0.78	-	0.78	-
0-1918764-7	21.336 - 21.946	70.00 - 72.00	0.78	-	0.78	-
0-1918764-8	24.384 - 24.994	80.00 - 82.00	0.79	-	0.79	-
0-1918764-9	27.432 - 28.042	90.00 - 92.00	0.79	-	0.79	-
1-1918764-0	30.480 - 31.394	100.00 - 103.00	0.8	-	0.8	-
1-1918764-1	33.528 - 34.442	110.00 - 113.00	0.8	-	0.8	-
1-1918764-2	36.576 - 37.490	120.00 - 123.00	0.8	-	0.8	-
1-1918764-3	39.624 - 40.538	130.00 - 133.00	0.81	-	0.81	-
1-1918764-4	42.672 - 43.586	140.00 - 143.00	0.81	-	0.81	-
1-1918764-5	45.720 - 46.634	150.00 - 153.00	0.82	-	0.82	-
1-1918764-6	48.768 - 49.682	160.00 - 163.00	0.82	-	0.82	-
1-1918764-7	51.816 - 52.730	170.00 - 173.00	0.83	-	0.83	-
1-1918764-8	54.864 - 55.778	180.00 - 183.00	0.83	-	0.83	-
1-1918764-9	57.912 - 58.826	190.00 - 193.00	0.84	-	0.84	-
2-1918764-0	60.960 - 62.179	200.00 - 204.00	0.84	-	0.84	-
2-1918764-1	64.008 - 65.227	210.00 - 214.00	0.85	-	0.85	-
2-1918764-2	67.056 - 68.275	220.00 - 224.00	0.85	-	0.85	-
2-1918764-3	70.104 - 71.323	230.00 - 234.00	0.86	-	0.86	-
2-1918764-4	73.152 - 74.371	240.00 - 244.00	0.86	-	0.86	-
2-1918764-5	76.200 - 77.419	250.00 - 254.00	0.86	-	0.86	-
2-1918764-6	79.248 - 80.467	260.00 - 264.00	0.87	-	0.87	-
2-1918764-7	82.296 - 83.515	270.00 - 274.00	0.87	-	0.87	-
2-1918764-8	85.344 - 86.563	280.00 - 284.00	0.88	-	0.88	-
2-1918764-9	88.392 - 89.611	290.00 - 294.00	0.88	-	0.88	-
3-1918764-0	91.440 - 93.269	300.00 - 306.00	0.89	-	0.89	-
3-1918764-1	94.488 - 96.378	310.00 - 316.20	0.89	-	0.89	-
3-1918764-2	97.536 - 99.487	320.00 - 326.40	0.9	-	0.9	-
3-1918764-3	100.584 - 102.596	330.00 - 336.60	0.9	-	0.9	-
3-1918764-4	103.632 - 105.705	340.00 - 346.80	0.91	-	0.91	-
3-1918764-5	106.680 - 108.814	350.00 - 357.00	0.91	-	0.91	-
3-1918764-6	109.728 - 111.923	360.00 - 367.20	0.91	-	0.91	-
3-1918764-7	112.776 - 115.032	370.00 - 377.40	0.92	-	0.92	-
3-1918764-8	115.824 - 118.140	380.00 - 387.60	0.92	-	0.92	-
3-1918764-9	118.872 - 121.249	390.00 - 397.80	0.93	-	0.93	-
4-1918764-0	121.920 - 124.358	400.00 - 408.00	0.93	-	0.93	-
4-1918764-1	124.968 - 127.467	410.00 - 418.20	0.94	-	0.94	-
4-1918764-2	128.016 - 130.576	420.00 - 428.40	0.94	-	0.94	-
4-1918764-3	131.064 - 133.685	430.00 - 438.60	0.95	-	0.95	-
4-1918764-4	134.112 - 136.794	440.00 - 448.80	0.95	-	0.95	-

Qty	U of M	Description	Item No.
4	piece	Dust Cover	23
0.167	piece	Label, 1 & 2	22
4	piece	Boot, MPO - Gray	21
1	piece	Caution Label	20
4	piece	Mini boot, 12 fiber	19
1	piece	Heat Shrink Tubing	18
1	piece	Pulling Sock	17
4	piece	Crimp Ring	16
4	piece	Pin Holder w/out Pins	15
4	piece	Spirap 5.5"	14
4	piece	Spring Retainer	13
4	piece	Construction tape	12
AR	meter	24 Fiber, 50/125, 7.8mm, CLT, Orange, OFNR/OFNP	11
2	piece	Heat Shrink Tubing	10
1	piece	Braided Sleeve	9
3	piece	Trace Label	8
4.06	meters	Oval Tube, Orange	7
0.2	RL	Electrical Tape	6
0.5	piece	Foam Cap	5
4	piece	Spring	4
2	piece	VACUUM HOSE, SPIRAFLEX 1 FOOT	3
4	piece	Connector Housing	2
4	piece	Ferrule, MT, MM, 12 Fiber	1

[illegible]

DIMENSIONS;
meters

TOLERANCES UNLESS OTHERWISE SPECIFIED		
0 PLC	±	—
1 PLC	±	—
2 PLC	±	—
3 PLC	±	—
4 PLC	±	—

Restricted To:

QW Cable Assy Configurator		MATERIAL -		HEAT TREAT -	
CHK Joe Davis		 Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD Joe Davis					
NAME FO C/A - 24 fiber, 50/125, OFNR-OFNP, MPO SECURE (No Pins) to MPO SECURE (No Pins)					
SCALE NTS	SIZE A2	DRAWING NO C- 1918764		SHEET 3 of 5	REV A

D

C

B

A

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16


CAC Customer Layout Rev: D

THIS DRAWING IS A CONTROLLED DOCUMENT.

REV NO

Part #	L (meters)	L (feet)	MPO SECURE (No Pins), Slate		MPO SECURE (No Pins), Slate	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1918764-5	137.160 - 139.903	450.00 - 459.00	0.96	-	0.96	-
4-1918764-6	140.208 - 143.012	460.00 - 469.20	0.96	-	0.96	-
4-1918764-7	143.256 - 146.121	470.00 - 479.40	0.96	-	0.96	-
4-1918764-8	146.304 - 149.230	480.00 - 489.60	0.97	-	0.97	-
4-1918764-9	149.352 - 152.339	490.00 - 499.80	0.97	-	0.97	-
5-1918764-0	152.400 - 155.448	500.00 - 510.00	0.98	-	0.98	-
5-1918764-1	160.020 - 163.220	525.00 - 535.50	0.99	-	0.99	-
5-1918764-2	167.640 - 170.993	550.00 - 561.00	1	-	1	-
5-1918764-3	175.260 - 178.765	575.00 - 586.50	1.01	-	1.01	-
5-1918764-4	182.880 - 186.538	600.00 - 612.00	1.02	-	1.02	-
5-1918764-5	190.500 - 194.310	625.00 - 637.50	1.04	-	1.04	-
5-1918764-6	198.120 - 202.082	650.00 - 663.00	1.05	-	1.05	-
5-1918764-7	205.740 - 209.855	675.00 - 688.50	1.06	-	1.06	-
5-1918764-8	213.360 - 217.627	700.00 - 714.00	1.07	-	1.07	-
5-1918764-9	220.980 - 225.400	725.00 - 739.50	1.08	-	1.08	-
6-1918764-0	228.600 - 233.172	750.00 - 765.00	1.09	-	1.09	-
6-1918764-1	236.220 - 240.944	775.00 - 790.50	1.1	-	1.1	-
6-1918764-2	243.840 - 248.717	800.00 - 816.00	1.12	-	1.12	-
6-1918764-3	251.460 - 256.489	825.00 - 841.50	1.13	-	1.13	-
6-1918764-4	259.080 - 264.262	850.00 - 867.00	1.14	-	1.14	-
6-1918764-5	266.700 - 272.034	875.00 - 892.50	1.15	-	1.15	-
6-1918764-6	274.320 - 279.806	900.00 - 918.00	1.16	-	1.16	-
6-1918764-7	281.940 - 287.579	925.00 - 943.50	1.17	-	1.17	-
6-1918764-8	289.560 - 295.351	950.00 - 969.00	1.18	-	1.18	-
6-1918764-9	297.180 - 303.124	975.00 - 994.50	1.2	-	1.2	-
7-1918764-0	304.800 - 310.896	1000.00 - 1020.00	1.21	-	1.21	-

	A	Rev Per EC#	RELEASE	7/28/2008	-	JD			
P	LTR	REVISION RECORD		DATE	DIN	APVD			



TOLERANCES UNLESS OTHERWISE SPECIFIED:	
9 P/LC	± .
1 P/LC	± .
2 P/LC	± .
3 P/LC	± .
4 P/LC	± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	HEAT TREAT
OK	Joe Davis		
APVD	Joe Davis	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME: FO C/A - 24 fiber, 50/125, OFNR-OFNP, MPO SECURE (No Pins) to MPO SECURE (No Pins)			
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 1918764	4 of 5
			REV A

8 7 6 5 4 3 2 1

D
C
B
A

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

CAC Customer Layout Rev: D

8 7 6 5 4 3 2 1

Label 1

Per specification 107-1645-1



Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.


Label 2

Per specification 107-1645-1




Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

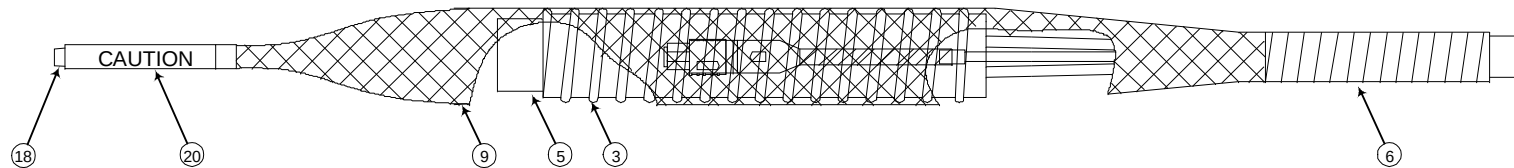

Protective Cover
Bottom End

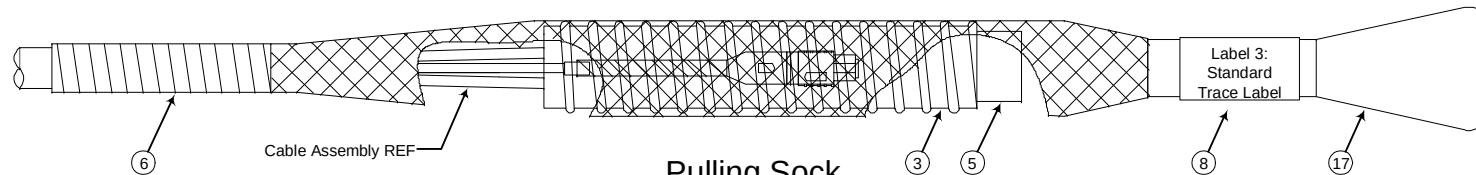

Pulling Sock
Top End

DIMENSIONS:	
meters	

TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 P.L.C.	± .
1 P.L.C.	± .
2 P.L.C.	± .
3 P.L.C.	± .
4 P.L.C.	± .

DIN Cable Assy Configurator		MATERIAL	HEAT TREAT	
CHK	Joe Davis	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608		
APVD	Joe Davis			
NAME FO C/A - 24 fiber, 50/125, OFNR-OFNP, MPO SECURE (No Pins) to MPO SECURE (No Pins)				
SCALE	SIZE	DRAWING NO	SHEET	REV
NTS	A2	C- 1918764	5 of 5	A

Restricted To: