

Right Angle Panel DIP Switches

Features

Optimized Mechanical Features

- Designed for panel applications
Saves cost of right angle socket
- Multiple circuit configurations available
- Standard 2.54mm (.100") x 2.54mm (.100") centers, uses minimum PCB real estate
- Sealed version optional: assures contaminant-free switch operation after wave soldering and cleaning
- Available with low profile, standard, or extended actuators for SPST circuitry

Optimized Contact System

- Contact wiping action on make and break
- Integral terminal and contact locked into high temperature plastic base
- Electrostatic discharge shield rated to 22 KV

Materials

- Series 206RA, gold plated contacts for long-term contact corrosion resistance
- Series 208RA, tin plated contacts
- UL 94V-0 plastics
- RoHS compliant



Series 206RA – Premium Gold Plated Contacts
Series 208RA – Economical Tin Plated Contacts

Electrical and Mechanical Specifications

Switch Function

- SPST - 2 through 10 and 12 positions
- SPDT&DPST- 1 through 6 positions
- 3PST - 1 through 4 positions

Switch Contact Resistance

Switch Series	Initial, max.	End of life , max.
206RA	50 milliohms	100 milliohms
208RA	100 milliohms	500 milliohms

Insulation Resistance

- 1,000 megohms minimum between insulated terminals

Dielectric Strength

- 500 VAC for 1 minute between adjacent switches

Nonswitching Rating

- 100 mA or 50 VDC maximum

Switch Capacitance

- 5.0 pF maximum between adjacent closed switches

Operating Temperature

- 55°C to +85°C

Actuation Life

- Series 206RA: 10,000 cycles switching 50 mA @ 24 VDC
- Series 208RA: 2,000 cycles switching 50 mA @ 24 VDC

Allowable Solder Time

- Wave soldering up to 5 seconds at 260°C

Vibration

- Per MIL-STD-202F, method 204D, condition B (.06" or 15 G's between 10 HZ to 2K HZ) with no contact inconsistencies greater than 1 microsecond

Shock

- Per MIL-STD-202F, method 213B, condition A (50 G's) with no contact inconsistencies greater than 1 microsecond

Sealing

- Bottom epoxy seal optional
- Top tape seal optional


Marking

- Special side or top marking available-consult CTS

Packaging


- Standard : Anti-Static tube packaging

SPST Series 206RA/208RA

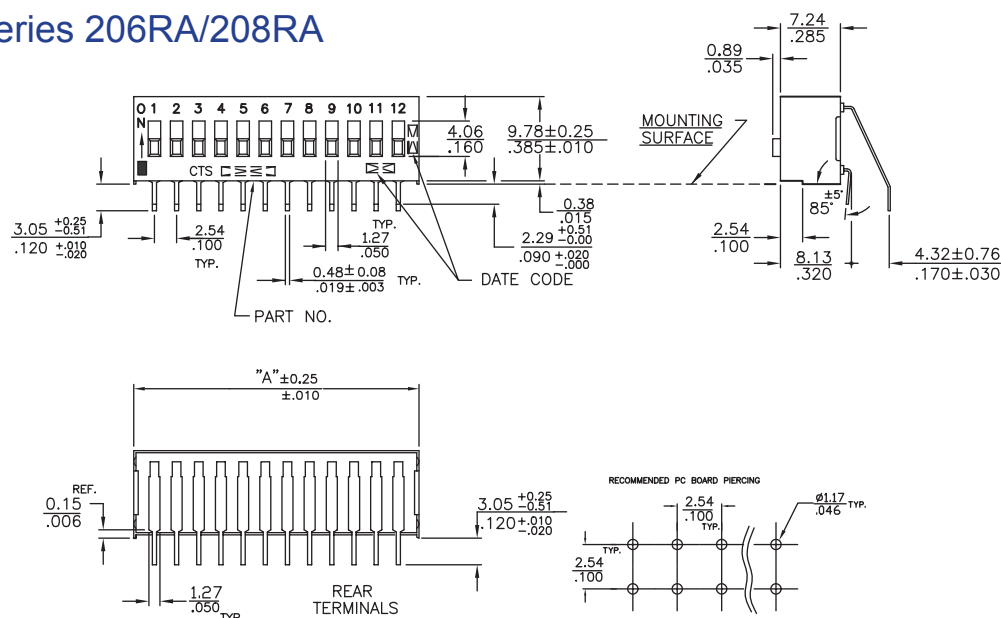

Please find panel drawing of 206/208 RA DIP switches with SPDT,DPST,3PST circuitry from 206/208 series data sheet

Ordering Information

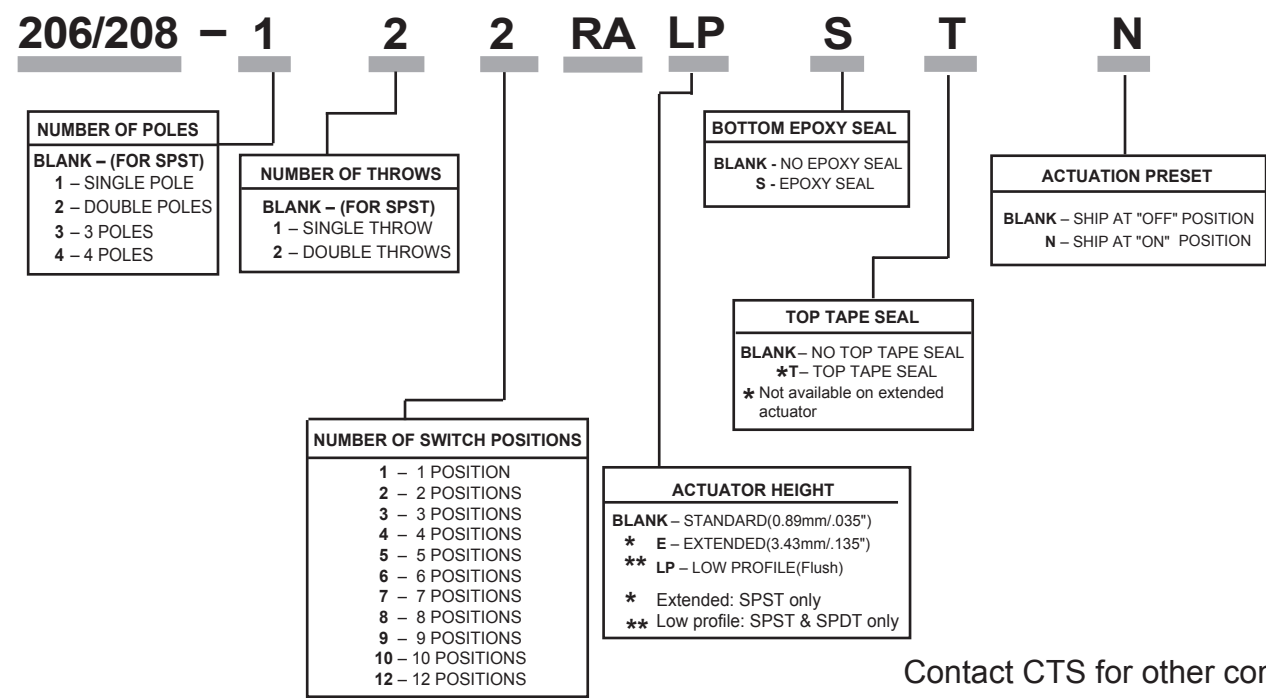

Contact CTS for other common features not listed.

Standard Part #							
Dimensions		SPST Switches		SPDT&DPST Switches		3PST Switches	
"A" Overall (mm/inch)	No of SW positions	SPST P/N		No of SW positions	SPDT P/N	DPST P/N	3PST P/N
7.26 / .286	2	206/208- 2 RA		1	206/208-121RA	206/208-211RA	—
9.80 / .386	3	206/208- 3 RA		—	—	—	1 206/208-311RA
12.34 / .486	4	206/208- 4 RA		2	206/208-122RA	206/208-212RA	—
14.88 / .586	5	206/208- 5 RA		—	—	—	—
17.42 / .686	6	206/208- 6 RA		3	206/208-123RA	206/208-213RA	2 206/208-312RA
19.96 / .786	7	206/208- 7 RA		—	—	—	—
22.50 / .886	8	206/208- 8 RA		4	206/208-124RA	206/208-214RA	—
25.04 / .986	9	206/208- 9 RA		—	—	—	3 206/208-313RA
27.58 / 1.086	10	206/208-10 RA		5	206/208-125RA	206/208-215RA	—
32.66 / 1.286	12	206/208-12 RA		6	206/208-126RA	206/208-216RA	4 206/208-314RA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CTS:](#)

[206-221RAST](#) [206-222RAST](#) [206-223RAST](#) [206-411RAST](#) [206-412RAST](#) [206-413RAST](#) [206-221RAS](#) [206-221RA](#) [206-222RAS](#) [206-222RA](#) [206-223RAS](#) [206-223RA](#) [206-411RAS](#) [206-411RA](#) [206-412RAS](#) [206-412RA](#) [206-413RAS](#) [206-413RA](#)