

General Specifications

B Electrical Capacity (Resistive Load)

Power Level (silver): 6A @ 125V AC & 3A @ 250V AC
4A @ 30V DC for On-None-On; 3A @ 30V DC for all other circuits

Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Logic/Power Level (gold over silver): Combines silver & gold ratings
Note: Find additional explanation of dual rating & operating range in Supplement section.

Other Ratings

Contact Resistance: 10 milliohms maximum for silver; 20 milliohms maximum for gold

Insulation Resistance: 1,000 megohms minimum @ 500V DC

Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
1,500V AC minimum between contacts and case for 1 minute minimum

Mechanical Life: 50,000 operations minimum

Electrical Life: 25,000 operations minimum for silver; 50,000 operations minimum for gold;
50,000 operations minimum for silver at 3A @ 125V AC

Angle of Throw: 25°

Materials & Finishes

Actuator Clip & Mounting Frame: Stainless Steel

Body Frame: Stainless steel

Case: Diallyl phthalate resin (UL94V-0)

Movable Contactor: Phosphor bronze with silver or gold plating

Movable Contacts: Silver alloy (code W); copper with gold plating (code G); or silver alloy with gold plating (code A)

Stationary Contacts: Silver with silver plating (code W); copper or brass with gold plating (code G);
or silver with gold plating (code A)

Terminals: Copper or brass with silver plating; or copper or brass with gold plating

Environmental Data

Operating Temp Range: -30°C through +85°C (-22°F through +185°F)

Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)

Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours

Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Processing

Soldering: Wave Soldering (PC version) for Gold: See Profile A in Supplement section.

Manual Soldering for Gold: See Profile A in Supplement section.

Wave Soldering (PC version) for Silver: See Profile B in Supplement section.

Manual Soldering for Silver: See Profile B in Supplement section.

Note: Actuator must be in OFF (center) position while soldering.

Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

Flammability Standards: UL94V-0 for case

UL: File No. E44145 - Recognized only when ordered with marking on switch.

Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.

All models recognized at 6A @ 125V AC, 3A @ 250V AC or 0.4VA maximum @ 28V DC maximum.

CSA: File No. 023535_0_000 - Certified only when ordered with marking on switch.

Add "/C" before first dash in part number to order CSA certified switch.

All models certified at 6A @ 125V AC or 3A @ 250V AC or 0.4VA maximum @ 28V maximum.

Distinctive Characteristics

Three methods of panel mounting: flat frame for flush with face or subpanel, snap-in, and PCB.

High insulating barriers increase isolation of circuits in multipole devices and provide added protection to contact points.


The molded diallyl phthalate case has a UL 94V-0 flammability rating.

Epoxy sealed terminals prevent entry of solder flux and other contaminants.



Prominent external insulating barriers increase insulation resistance and dielectric strength.

Bias guard prevents misalignment of contacts; interlocking of actuator block with rocker and internal guide does not allow transmission of diagonal force on rocker to reach contact mechanism.

Clinching of the frame to the case well above the base and terminals provides 1,500V dielectric strength.

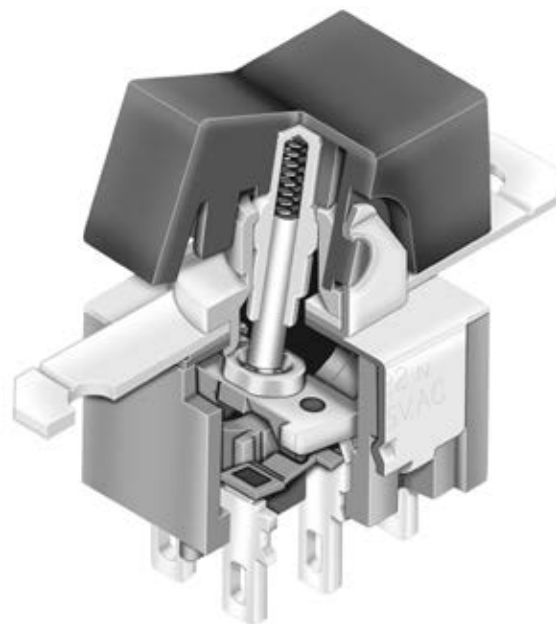


Actual Size

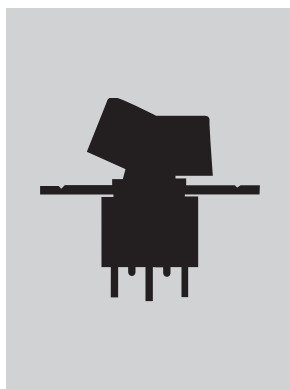


Snap-in Mount

Page B64



Bracket PC Mount


Page B72



Flat Frame Mount

Page B83

TYPICAL SWITCH

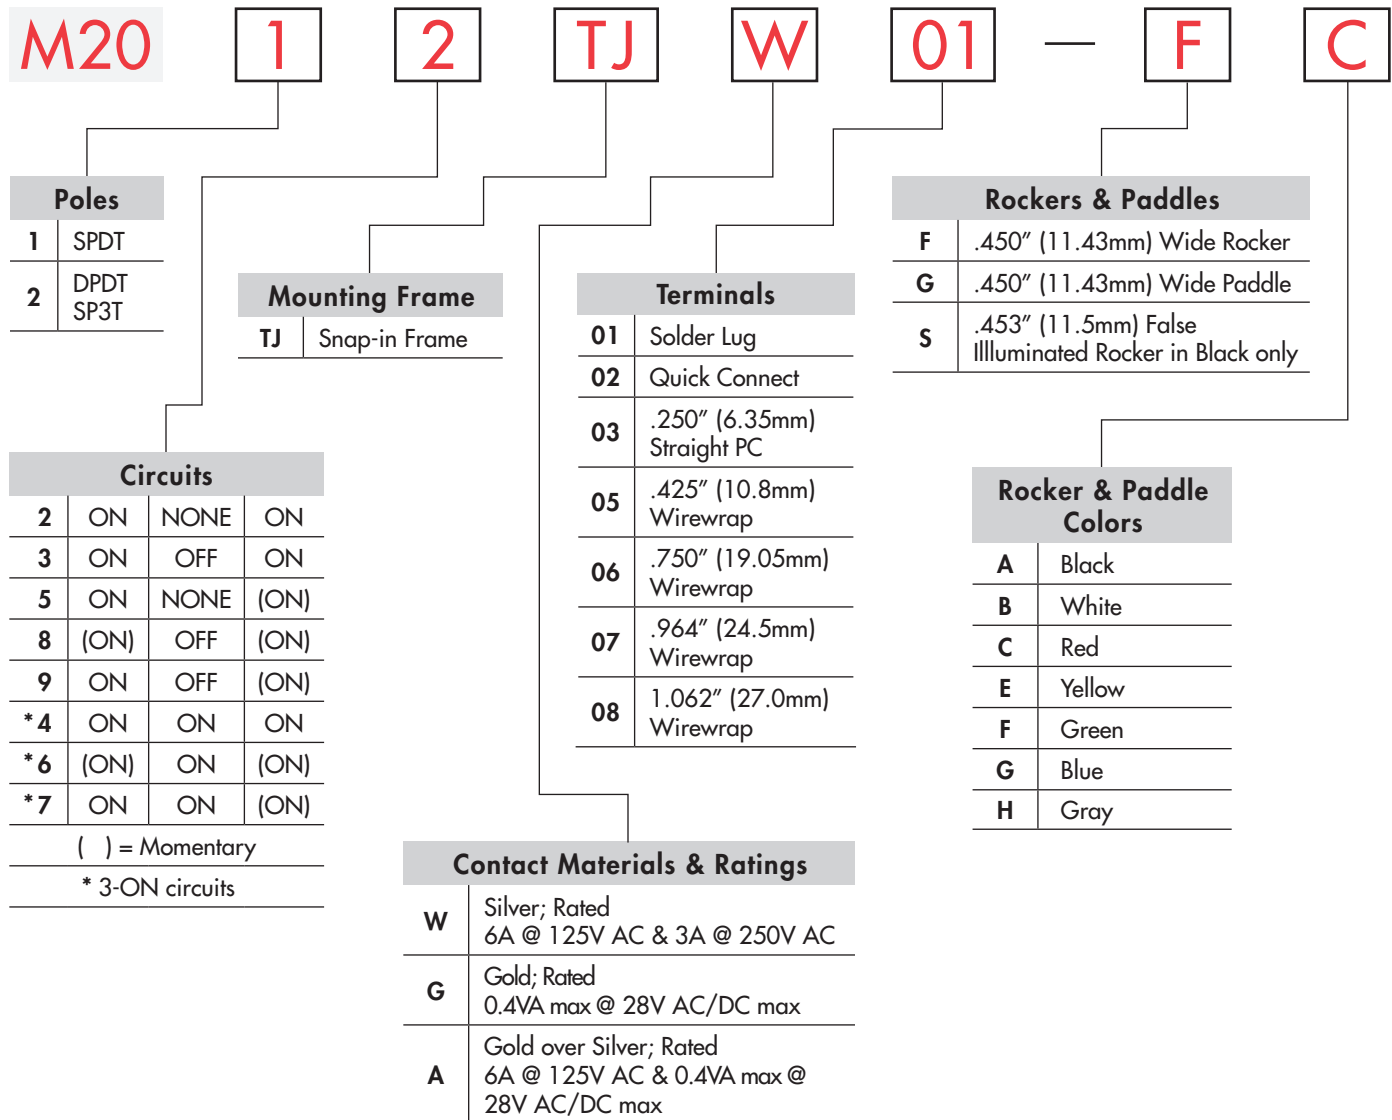


DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

M2012TJW01-FC-1A



ORDERING EXAMPLE

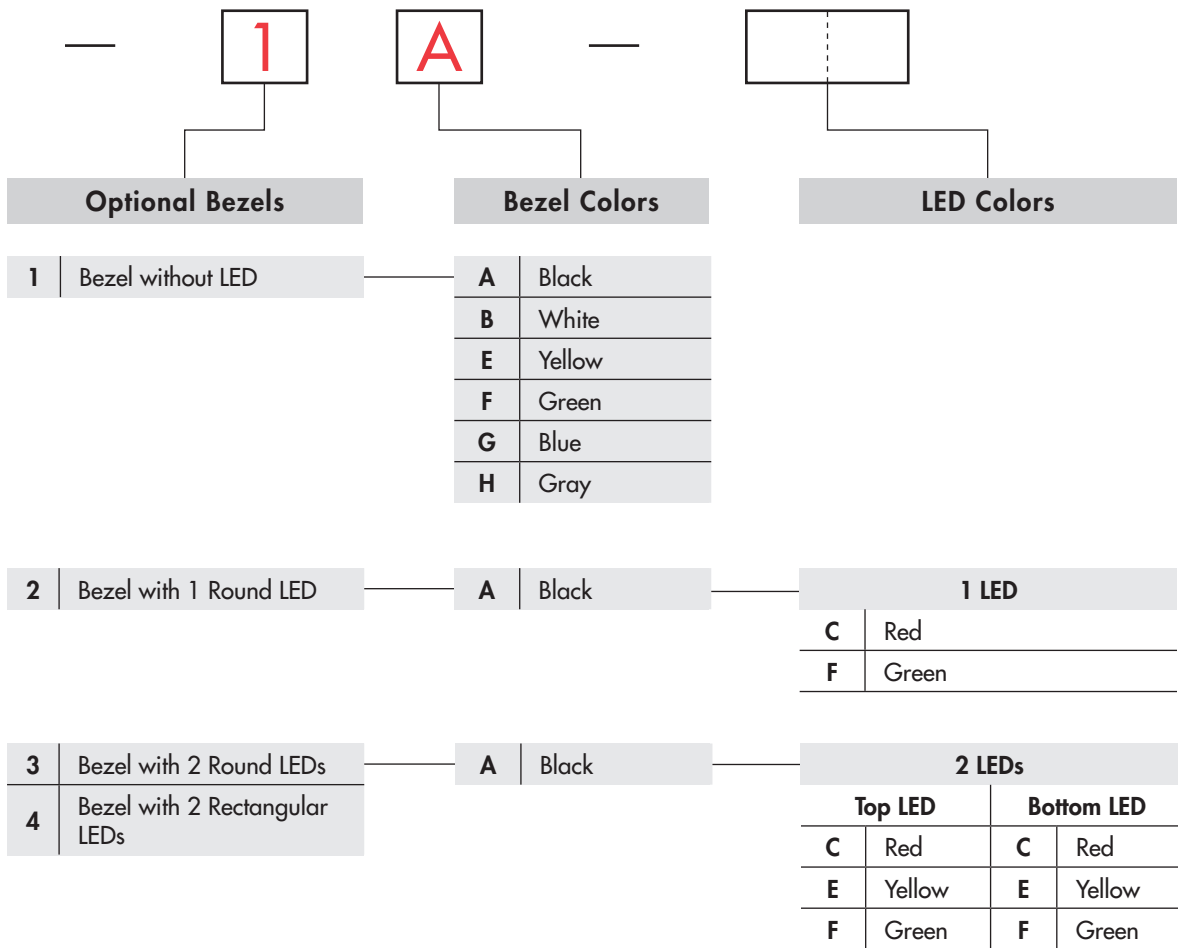


IMPORTANT:




Switches are supplied without UL, cULus & CSA marking unless specified.
UL, cULus & CSA recognized only when ordered with marking on the switch.
Specific models, ratings, & ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE





M2012TJW01-FC-3A-CF

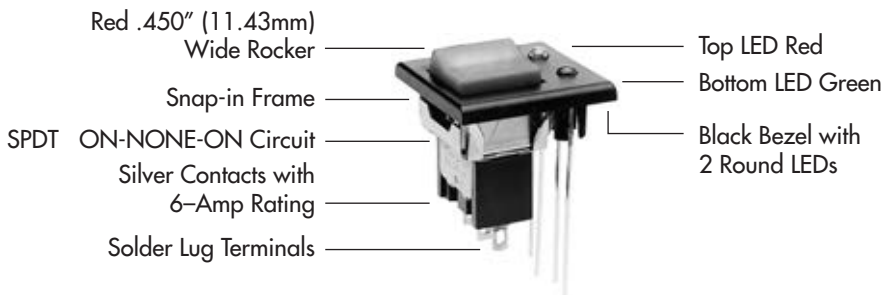

POLES & CIRCUITS

Pole	Model	Rocker Position () = Momentary			Connected Terminals			Throw & Schematics
		Down	Center	Up	Down	Center	Up	
SP	M2012	ON	NONE	ON				SPDT 
	M2013	ON	OFF	ON				
	M2015	ON	NONE	(ON)	2-3	OPEN	2-1	
	M2018	(ON)	OFF	(ON)				
	M2019	ON	OFF	(ON)				
DP	M2022	ON	NONE	ON				DPDT 
	M2023	ON	OFF	ON				
	M2025	ON	NONE	(ON)	2-3 5-6	OPEN	2-1 5-4	
	M2028	(ON)	OFF	(ON)				
	M2029	ON	OFF	(ON)				


For 3 Throw (3-On)

		Connected Terminals & Schematic			External Connection
Pole	Model	Down	Center	Up	
SP	M2024	ON	ON	ON	The SP3T model utilizes a double pole base. External connection must be made during field installation. 
	M2026	(ON)	ON	(ON)	
	M2027	ON	ON	(ON)	
		 2-3 5-6	 2-3 5-4	 2-1 5-4	


MOUNTING FRAME

TJ


Snap-in Frame

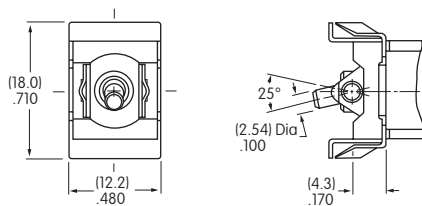

Panel Cutout for Single Pole without Bezel



Panel Cutout for Double Pole without Bezel



Panel Thickness without Bezel: .039" ~ .126" (1.0mm ~ 3.2mm)

Panel Thickness with Bezel: .039" ~ .098" (1.0mm ~ 2.5mm)

CONTACT MATERIALS & RATINGS

W

Silver over Silver

Power Level

6A @ 125V AC & 3A @ 250V AC

G

Gold over Brass or Copper

Logic Level

0.4VA maximum @ 28V AC/DC maximum

Note: See Supplement section to find complete explanation of operating range.

A

Gold over Silver

Power Level
or Logic Level6A @ 125V AC
or 0.4VA maximum @ 28V AC/DC maximum

Note: This dual rated option is suitable when two or more identical switches are used in logic and in power circuits within the same application. See Supplement section to find complete explanation of dual rating and operating range.

TERMINALS

Toggles

B Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt


Touch

Indicators


Accessories

Supplement



01 Solder Lug




02 .062" (1.57mm) Wide Quick Connect



03 .250" (6.35mm) Straight PC



Single Pole




Double Pole

05 .425" (10.8mm) Wirewrap or Extended PC

06 .750" (19.05mm) Wirewrap or Extended PC

07 .964" (24.5mm) Wirewrap or Extended PC

08 1.062" (27.0mm) Wirewrap or Extended PC



If using as extended PC terminal, refer to the above footprints.


Dimension A = terminal lengths as shown beside the terminal codes at the left.

ROCKERS & PADDLES

F AT4150 .450" (11.43mm) Wide Rocker

Material: Polyamide
Finish: Matte


Colors Available:
A, B, C, E, F, G, H



G AT4151 .450" (11.43mm) Wide Paddle

Material: Polyamide
Finish: Matte


Colors Available:
A, B, C, E, F, G, H



S AT466 .453" (11.5mm) False Illuminated Rocker

Material: Polycarbonate
Finish: Glossy
Colors: Black

False Illuminator
Acrylonitrile Butadiene Styrene
White and Red



When a bezel is selected with AT466, glossy polycarbonate AT207 is supplied.

Cap Colors Available:

A

Black

B

White

C

Red

E

Yellow

F

Green

G

Blue

H


Gray

OPTIONAL SNAP-IN BEZELS & BEZEL COLORS


1 AT2107 Bezel

Material: Polyamide

Finish: Matte



A	Black	F	Green
B	White	G	Blue
E	Yellow	H	Gray




	Single Pole	Double Pole
A	(12.5)mm .492"	(13.1)mm .516"

2 AT208 Bezel for AT070 LED

Material: Polycarbonate


Finish: Glossy

Contact factory for matte finish.

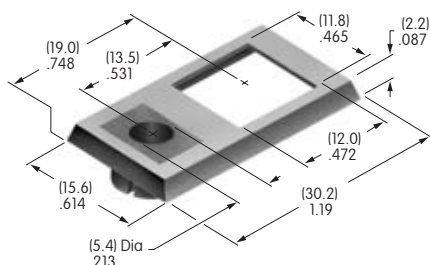

A Black
LED colors & specifications on next page.


	Single Pole	Double Pole
A	(12.5)mm .492"	(13.1)mm .516"
B	(6.25)mm .246"	(6.55)mm .258"



3 AT212 Bezel for AT617 LED


Material: Polycarbonate

Finish: Semi-glossy

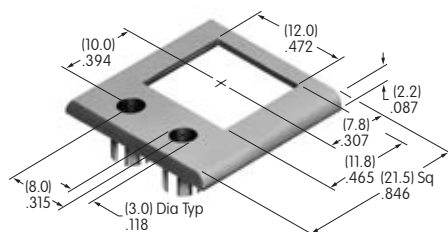

A Black
LED colors & specifications on next page.


	Single Pole	Double Pole
A	(18.4)mm .724"	(18.7)mm .736"



4 AT213 Bezel for AT618 LED


Material: Polycarbonate

Finish: Semi-glossy

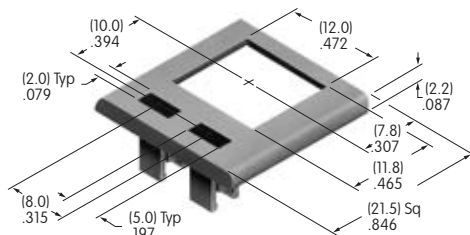


A Black
LED colors & specifications on next page.

	Single Pole	Double Pole
A	(18.4)mm .724"	(18.7)mm .736"




Bezel Assembly


1. Pry out tab on bezel to a 45° angle.




2. Insert switch frame under tab and snap on bezel.



3. Push tab back into place.




4. Snap assembled bezel and switch into panel.




LED COLORS & SPECIFICATIONS


AT070 LED
For Bezel AT208
with 1 LED

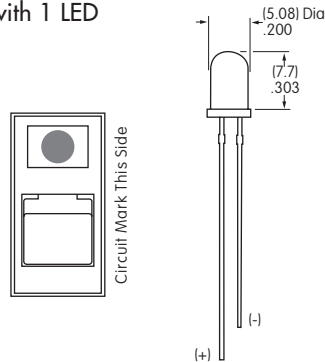

AT617 LED
For Bezel AT212
with 2 Round LEDs



AT618 LED
For Bezel AT213
with 2 Rectangular LEDs

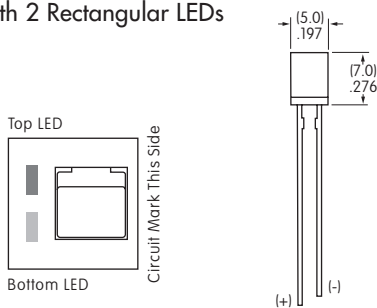

Note: Lead lengths may differ from manufacturing lot to lot. The longer lead is the anode (+).

		AT070		AT617			AT618		
		C	F	C	E	F	C	E	F
	Color	Red	Green	Red	Yellow	Green	Red	Yellow	Green
Maximum Forward Current	I_{FM}	25mA	50mA	30mA	30mA	25mA	25mA	30mA	25mA
Typical Forward Current	I_F	20mA	30mA	20mA	20mA	20mA	20mA	20mA	20mA
Forward Voltage	V_F	2.8V	2.1V	2.0V	2.1V	2.2V	2.25V	2.1V	2.2V
Maximum Reverse Voltage	V_{RM}	4V	5V	5V	5V	5V	5V	5V	5V
Current Reduction Rate Above 25°C	ΔI_F	0.33 mA/°C	0.40 mA/°C	0.40 mA/°C	0.40 mA/°C	0.33 mA/°C	0.33 mA/°C	0.40 mA/°C	0.33 mA/°C
Ambient Temperature Range (when used with a bezel)		-10° ~ +70°C		-15° ~ +70°C			-25° ~ +70°C		

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is independent of switch operation. LED is colored in OFF state.

If the source voltage is greater than the rated voltage of the LED, a ballast resistor must be connected in series with the lamp.
The ballast resistor calculation and more lamp detail are shown in the Supplement section.

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for Cap


Recommended Print Method:

Pad Print

Epoxy based ink is recommended.



AT4150




Shaded areas are printable areas.



TYPICAL SWITCH DIMENSIONS

Snap-in Frame • Solder Lug

Single Pole




M2012TJW01-FC


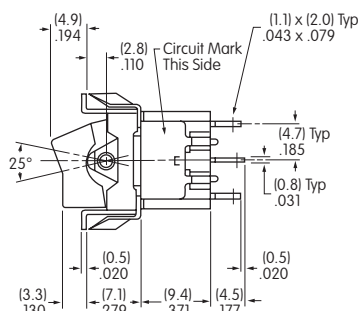


Snap-in Frame • Solder Lug

Double Pole




M2022TJW01-FC


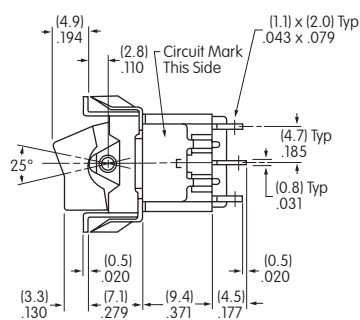


Snap-in Frame • Solder Lug

Single Pole




M2012TJW01-GC


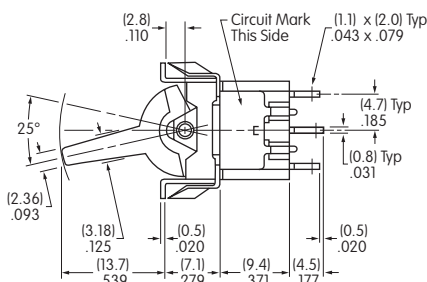


Snap-in Frame • Solder Lug

Double Pole




M2022TJW01-GC

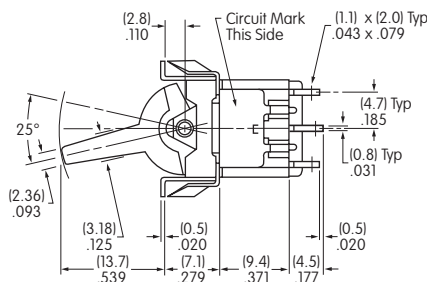

TYPICAL SWITCH DIMENSIONS

Single & Double Pole


Snap-in Frame • AT2107 Bezel • Solder Lug

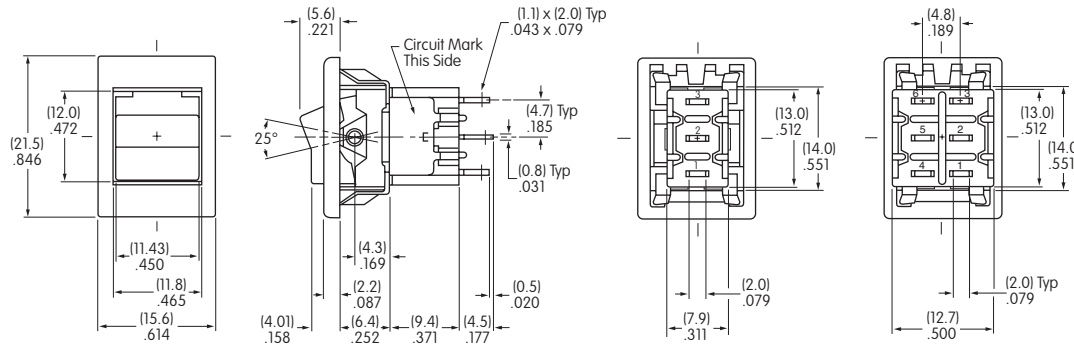

M2012TJW01-FC-1A

Double Pole


Snap-in Frame • AT208 Bezel • Solder Lug

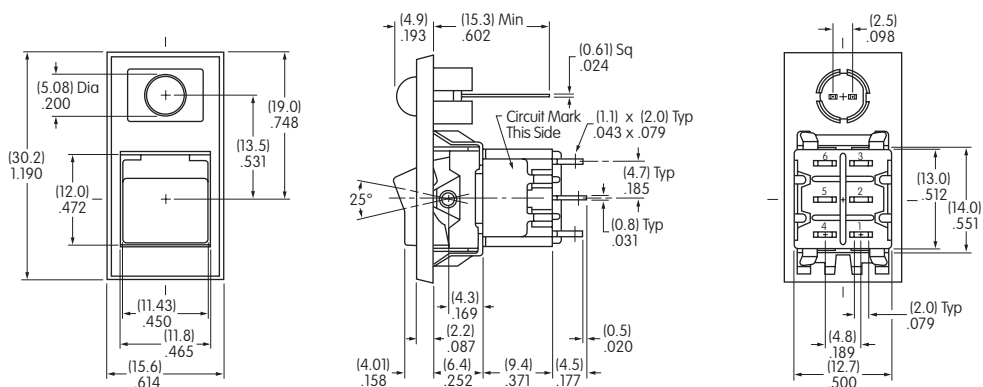

M2022TJW01-FC-2A-C

Single Pole


Snap-in Frame • AT212 Bezel • Solder Lug

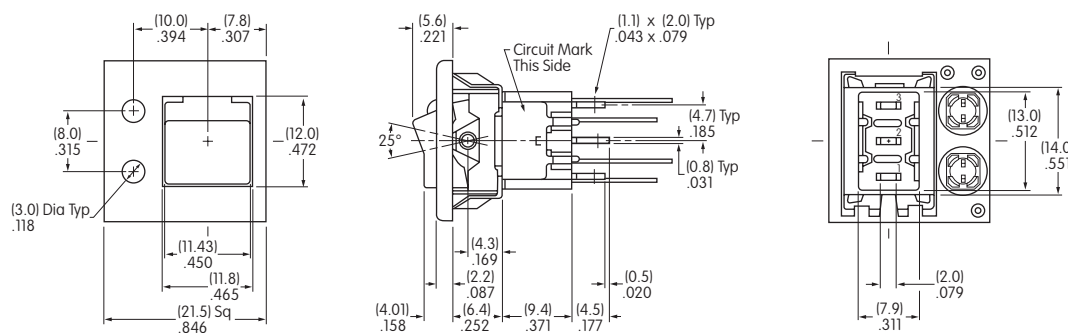

M2012TJW01-FC-3A-CF

Double Pole

Snap-in Frame • AT213 Bezel • Solder Lug

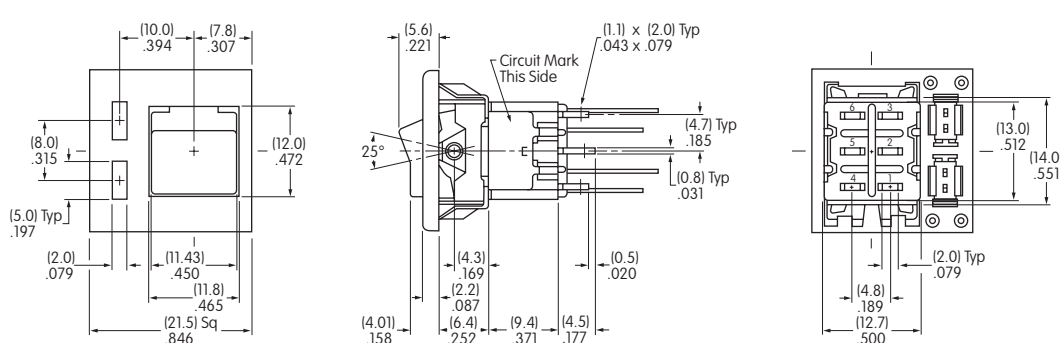

M2022TJW01-FC-4A-CF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NKK Switches:

[M2018TJW03-GA-1A](#) [M2012TJG01-FH-1A](#) [M2012TJW02-FG-3A-FC](#) [M2019TJG01-FA-2A-F](#) [M2023TJW01-FA-3A-CF](#) [M2022TJG01-FB-1B](#) [M2022TJG01-GB-1B](#) [M2029TJG02-FC-3A-CE](#) [M2029TJW01-FC-3A-CE](#) [M2028TJW01-GA-1A](#) [M2028TJW01-GA](#) [M2012TJA02-FH-3A-FC](#) [M2012TJA02-GH-3A-FC](#) [M2012TJG01-FA-1A](#) [M2012TJG01-FA-2A-C](#) [M2012TJG01-FA-3A-CF](#) [M2012TJG01-FC-1A](#) [M2012TJG01-FC-2A-C](#) [M2012TJG01-FE-1A](#) [M2012TJG01-GA-1A](#) [M2012TJG01-SA-1A](#) [M2012TJW01-FA](#) [M2012TJW01-FA-1A](#) [M2012TJW01-FA-1H](#) [M2012TJW01-FA-2A-F](#) [M2012TJW01-FA-3A-EF](#) [M2012TJW01-FA-4A-CF](#) [M2012TJW01-FB-1A](#) [M2012TJW01-FC-1A](#) [M2012TJW01-FC-1C](#) [M2012TJW01-FC-1G](#) [M2012TJW01-FC-2A-C](#) [M2012TJW01-FC-3A-CF](#) [M2012TJW01-FE-1A](#) [M2012TJW01-FF](#) [M2012TJW01-FF-1A](#) [M2012TJW01-FF-1G](#) [M2012TJW01-FG-1A](#) [M2012TJW01-FH-3A-CF](#) [M2012TJW01-GA-1A](#) [M2012TJW01-GA-2A](#) [M2012TJW01-GB-1A](#) [M2012TJW01-GC-1A](#) [M2012TJW01-GH-4A-EE](#) [M2012TJW01-SA](#) [M2012TJW02-FA-1A](#) [M2012TJW02-FA-4A-EE](#) [M2012TJW02-FC-1A](#) [M2012TJW02-GA-1A](#) [M2012TJW03-FA-1A](#) [M2012TJW03-FA-2A](#) [M2012TJW03-FA-4A-FE](#) [M2013TJG01-FA-1A](#) [M2013TJG01-FA-3A-CC](#) [M2013TJG01-FC-1A](#) [M2013TJG01-FC-3A-CF](#) [M2013TJW01-FA-1A](#) [M2013TJW01-FA-3A-CF](#) [M2013TJW01-FA-4A-CE](#) [M2013TJW01-FA-4A-CF](#) [M2013TJW01-FF-1A](#) [M2013TJW01-FH-4A-CF](#) [M2013TJW01-GA-1A](#) [M2013TJW01-GH-1H](#) [M2013TJW02-FA-3A-CF](#) [M2013TJW02-FA-3A-FC](#) [M2013TJW02-FH-3A-CF](#) [M2015TJA02-FG-3A-CF](#) [M2015TJG01-FA-1A](#) [M2015TJW01-FA-1A](#) [M2015TJW01-FB-1A](#) [M2015TJW01-GA-1A](#) [M2015TJW02-FA-1A](#) [M2018TJG01/UC-GA-1A](#) [M2018TJG01-FA-1A](#) [M2018TJG01-FB-3A-EE](#) [M2018TJG01-FC-1A](#) [M2018TJG01-FC-4A-EF](#) [M2018TJG01-FF-3A-CE](#) [M2018TJG01-FH-1G](#) [M2018TJG01-GA-1A](#) [M2018TJG01-GA-2A-F](#) [M2018TJG01-GC-1A](#) [M2018TJG01-SA-1A](#) [M2018TJG03-FA-4A-CF](#) [M2018TJG03-GA](#) [M2018TJW01/U-FA-1A](#) [M2018TJW01-FA-1A](#) [M2018TJW01-FA-1B](#) [M2018TJW01-FA-1F](#) [M2018TJW01-FA-3A-CF](#) [M2018TJW01-FA-4A-CF](#) [M2018TJW01-FB](#) [M2018TJW01-FB-1A](#) [M2018TJW01-FB-1H](#) [M2018TJW01-FC-1A](#) [M2018TJW01-FF-1A](#) [M2018TJW01-GA](#) [M2018TJW01-GA-1A](#) [M2018TJW01-GA-2A](#)