


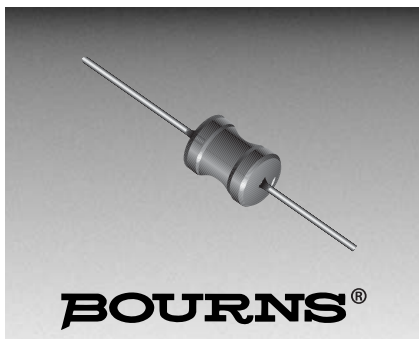

Features

- High current up to 5 A
- RoHS compliant*

Applications

- DC/DC converters
- Power supplies
- General use

LPA Series Axial Power Inductors

General Specifications


Temperature Rise

.....45 °C max. at rated current
Operating Temperature...-40 °C to +85 °C
Storage Temperature ...-40 °C to +105 °C

Materials


Core MaterialFerrite DR core
WireEnameled copper wire
TerminalCu/Sn
Tube.....Shrinkable tube 125 °C, 600 V

Product Dimensions

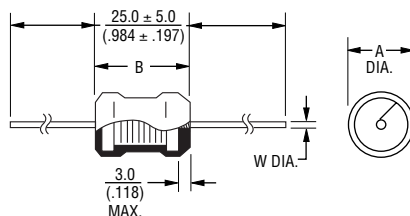

DIMENSIONS ARE: $\frac{\text{MM}}{(\text{INCHES})}$

Electrical Schematic



Electrical Characteristics and Product Dimensions

BOURNS Part No.	Inductance (μ H) 1KHz	RDC (Ω) max.	IDC (A) max.	Dimensions		
				A max.	B max.	W dia.
LPA0618-100KL	10 $\pm$ 10 %	0.075	2.00	$\frac{6.0}{(.236)}$	$\frac{18.0}{(.709)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA0618-250KL	25 $\pm$ 10 %	0.150	1.20	$\frac{6.0}{(.236)}$	$\frac{18.0}{(.709)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA0618-500KL	50 $\pm$ 10 %	0.200	0.80	$\frac{6.0}{(.236)}$	$\frac{18.0}{(.709)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA0618-101KL	100 $\pm$ 10 %	0.300	0.60	$\frac{6.0}{(.236)}$	$\frac{18.0}{(.709)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA0618-251KL	250 $\pm$ 10 %	1.000	0.40	$\frac{6.0}{(.236)}$	$\frac{18.0}{(.709)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA0618-501KL	500 $\pm$ 10 %	2.000	0.25	$\frac{6.0}{(.236)}$	$\frac{18.0}{(.709)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA0618-102KL	1000 $\pm$ 10 %	3.000	0.20	$\frac{6.0}{(.236)}$	$\frac{18.0}{(.709)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1020-100KL	10 $\pm$ 10 %	0.050	3.50	$\frac{10.0}{(.394)}$	$\frac{20.0}{(.787)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1020-250KL	25 $\pm$ 10 %	0.085	2.50	$\frac{10.0}{(.394)}$	$\frac{20.0}{(.787)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1020-500KL	50 $\pm$ 10 %	0.120	2.00	$\frac{10.0}{(.394)}$	$\frac{20.0}{(.787)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1020-101KL	100 $\pm$ 10 %	0.180	1.40	$\frac{10.0}{(.394)}$	$\frac{20.0}{(.787)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1020-251KL	250 $\pm$ 10 %	0.500	0.80	$\frac{10.0}{(.394)}$	$\frac{20.0}{(.787)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1020-501KL	500 $\pm$ 10 %	1.000	0.60	$\frac{10.0}{(.394)}$	$\frac{20.0}{(.787)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1020-102KL	1000 $\pm$ 10 %	2.200	0.40	$\frac{10.0}{(.394)}$	$\frac{20.0}{(.787)}$	$\frac{0.65 \pm 0.05}{(.026 \pm .002)}$
LPA1226-100KL	10 $\pm$ 10 %	0.030	5.0	$\frac{12.0}{(.472)}$	$\frac{26.0}{(1.024)}$	$\frac{0.8 \pm 0.05}{(.031 \pm .002)}$
LPA1226-250KL	25 $\pm$ 10 %	0.045	4.0	$\frac{12.0}{(.472)}$	$\frac{26.0}{(1.024)}$	$\frac{0.8 \pm 0.05}{(.031 \pm .002)}$
LPA1226-500KL	50 $\pm$ 10 %	0.080	3.0	$\frac{12.0}{(.472)}$	$\frac{26.0}{(1.024)}$	$\frac{0.8 \pm 0.05}{(.031 \pm .002)}$
LPA1226-101KL	100 $\pm$ 10 %	0.125	2.0	$\frac{12.0}{(.472)}$	$\frac{26.0}{(1.024)}$	$\frac{0.8 \pm 0.05}{(.031 \pm .002)}$
LPA1226-251KL	250 $\pm$ 10 %	0.300	1.2	$\frac{12.0}{(.472)}$	$\frac{26.0}{(1.024)}$	$\frac{0.8 \pm 0.05}{(.031 \pm .002)}$
LPA1226-501KL	500 $\pm$ 10 %	0.500	0.8	$\frac{12.0}{(.472)}$	$\frac{26.0}{(1.024)}$	$\frac{0.8 \pm 0.05}{(.031 \pm .002)}$
LPA1226-102KL	1000 $\pm$ 10 %	1.200	0.6	$\frac{12.0}{(.472)}$	$\frac{26.0}{(1.024)}$	$\frac{0.8 \pm 0.05}{(.031 \pm .002)}$

REV. 09/09

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[LPA0618-100KL](#) [LPA0618-101KL](#) [LPA0618-102KL](#) [LPA0618-250KL](#) [LPA0618-251KL](#) [LPA0618-500KL](#) [LPA0618-501KL](#) [LPA1020-100KL](#) [LPA1020-101KL](#) [LPA1020-102KL](#) [LPA1020-151KL](#) [LPA1020-250KL](#) [LPA1020-251KL](#) [LPA1020-500KL](#) [LPA1020-501KL](#) [LPA1226-100KL](#) [LPA1226-101KL](#) [LPA1226-250KL](#) [LPA1226-251KL](#) [LPA1226-500KL](#) [LPA1226-501KL](#) [LPA0618-251K](#) [LPA0618-501K](#) [LPA1020-151K](#) [LPA0618-250K](#) [LPA1226-251K](#) [LPA1226-250K](#) [LPA1020-250K](#) [LPA1020-500K](#) [LPA1020-501K](#) [LPA1020-251K](#) [LPA0618-102K](#) [LPA1226-501K](#) [LPA1226-500K](#) [LPA1020-102K](#) [LPA1226-102KL](#)