

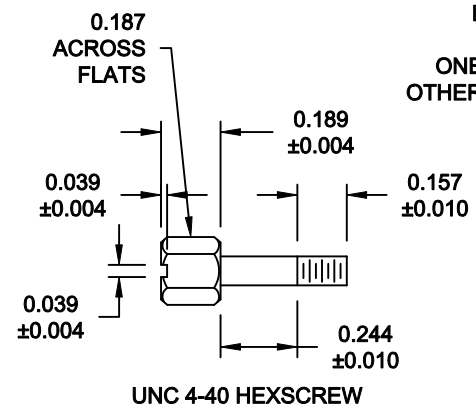
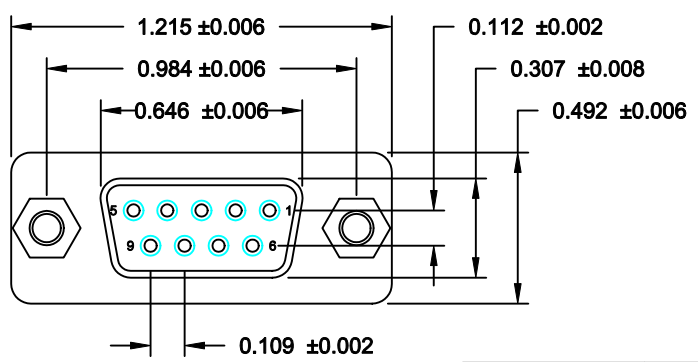
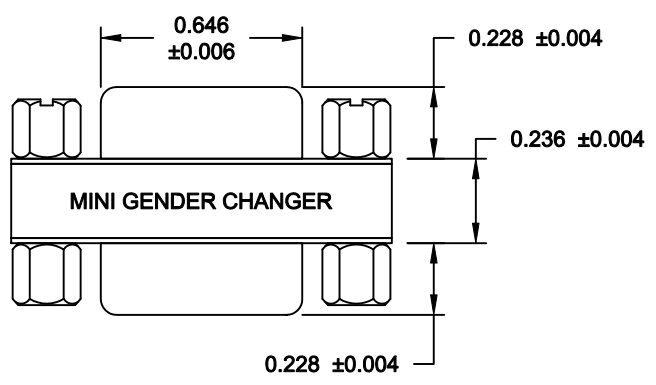


**SPECIFICATION:**

INSULATOR: PBT GLASS FIBER REINFORCED UL 94VO  
 CONTACT: BRASS  
 CONTACT PLATING: GOLD PLATED OVER NICKEL  
 SHELL: TIN PLATED SHELL  
 CURRENT RATING: 5 AMP  
 DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE  
 INSULATION RESISTANCE: 1,000 MegOHMS MIN @500 VDC  
 TEMPERATURE: -55° C - +105° C

**NOTE:**

LABEL: YELLOW COLOR WITH BLACK CHARACTORS  
 ONE SIDE: MINI GENDER CHANGER  
 OTHER SIDE: U.S.A. PATENT 5199906

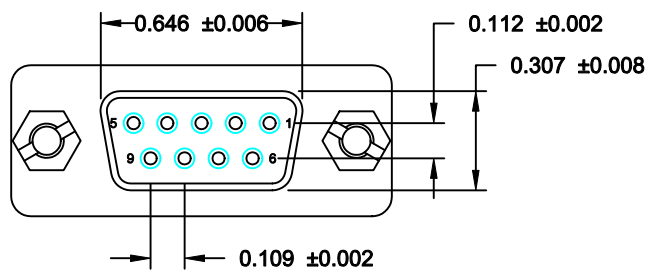

| 09-PIN FEMALE |       | 09-PIN FEMALE |
|---------------|-------|---------------|
| 1             | ----- | 1             |
| 2             | ----- | 2             |
| 3             | ----- | 3             |
| ~             |       |               |
| 8             | ----- | 8             |
| 9             | ----- | 9             |
| SHELL         | ---   | SHELL         |

PIN OUT

DO NOT SCALE FROM DRAWING

|                |   |                   |                           |                          |
|----------------|---|-------------------|---------------------------|--------------------------|
|                | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. |                   | DRAWN:<br><b>C. SMITH</b> | DATE:<br><b>10-12-07</b> |
|                |   |                   | CHECKED:                  | DATE:                    |
| <b>NorComp</b> | SCALE:<br><b>1.5 : 1</b>  | SHEET<br><b>1</b> | OF<br><b>1</b>            | REV<br><b>1</b>          |
|                | DWG NO. <b>GCLP09F09F</b>   |                   |                           |                          |

**RoHS COMPLIANT**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[GCLP09F09F](#)