


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-	C	CHANGE LOGO&ADD LINE IDENTIFICATION ECO-12-001771	22Aug2012	HYS YBH

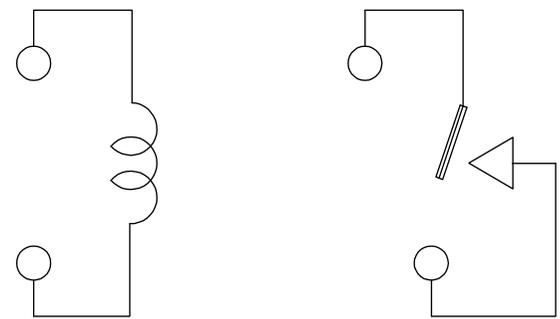

CONNECTION FIGURE

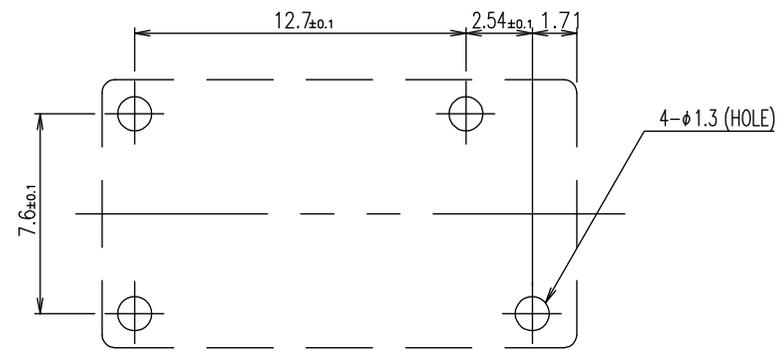
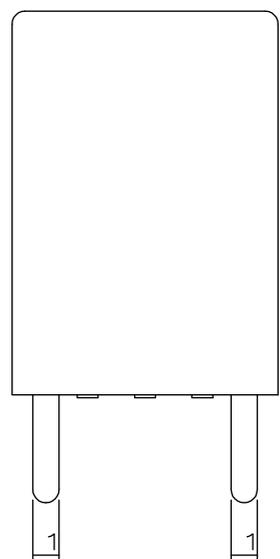
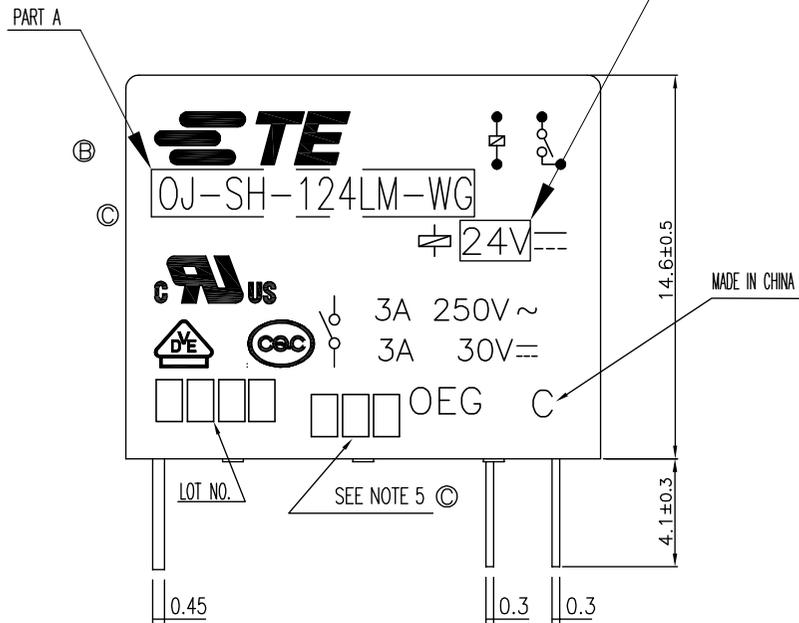


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING (BOTTOM VIEW)

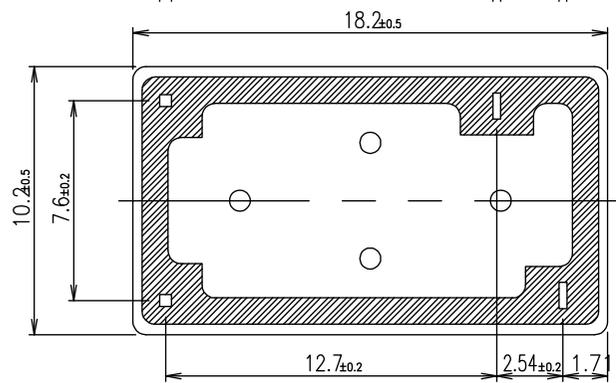


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	BC.TANG	<b>STE</b> TE Connectivity	
DIMENSIONS: mm		CHK	XN.ZHANG		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	W.YANG	NAME	
0 PLC	±-	PRODUCT SPEC	-	OJ-LM-WG CUSTOMER DRAWING	
1 PLC	±-	APPLICATION SPEC	-	SIZE	RESTRICTED TO
2 PLC	±-	WEIGHT	-	A3	-
3 PLC	±-	MATERIAL	-	CAGE CODE	DRAWING NO
4 PLC	±-	FINISH	-	00779	G= 1649637
ANGLES	±-	CUSTOMER DRAWING	-	SCALE	SHEET
				5:1	1 of 2
					REV
					C



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HB	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

Ⓢ	ACTIVE	1649637-6	OJ-SH-124LM-WG	24V	OJ-SH-124LM-WG	f
Ⓢ	ACTIVE	1649637-5	OJ-SH-112LM-WG	12V	OJ-SH-112LM-WG	e
Ⓢ	OBSOLETE	1649637-4	OJ-SH-109LM-WG	9V	OJ-SH-109LM-WG	d
Ⓢ	OBSOLETE	1649637-3	OJ-SH-106LM-WG	6V	OJ-SH-106LM-WG	c
Ⓢ	OBSOLETE	1649637-2	OJ-SH-105LM-WG	5V	OJ-SH-105LM-WG	b
Ⓢ	OBSOLETE	1649637-1	OJ-SH-103LM-WG	3V	OJ-SH-103LM-WG	a
	PART STATUS	TE PART NO	DESCRIPTION	PART B	PART A	TYPE

RELAY TYPE

Ⓢ NOTES:  
 1. LOT NO. SYSTEM AS FOLLOWING: Ⓢ 5. ADD LOT NO. SYSTEM AS FOLLOWING;



I, DIGITS FOR DAY OF THE WEEK  
 1...MONDAY IN THIS WEEK;  
 2...TUESDAY IN THIS WEEK;  
 .....  
 7...SUNDAY IN THIS WEEK  
 II, DIGITS FOR SHIFT OF THE DAY  
 1...DAY SHIFT IN THIS DAY;  
 2...NIGHT SHIFT IN THIS DAY;  
 III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY,  
 SUCH AS: A,B.....Z

- Ⓢ 2. TERMINAL DIMENSION IS BEFORE SOLDER DIP;
- Ⓢ 3. FOR THE TIN-PLATING OF THE PINS:  
 +0.1mm FOR WIDTH, THICKNESS AND DIAMETER.  
 +0.5mm FOR LENGTH.
- Ⓢ 4. MARKING FROM INK TO LASER.

		EPOXY RESIN	UV SEAL 3056C(VENT HOLE)	16
		EPOXY RESIN	SEEL (BASE & BOBBIN)	15
		MW79	MAGNETIC WIRE	14
94V-0		NYLON	CASE	13
94V-0		P.E.T	BASE	12
94V-0		NYLON	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	BC.TANG	-
DIMENSIONS: mm		CHK	XN.ZHANG	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	W.YANG	-
0 PLC ± -		PRODUCT SPEC	-	-
1 PLC ± -		APPLICATION SPEC	-	-
2 PLC ± -		WEIGHT	-	-
3 PLC ± -		SIZE	A3	-
4 PLC ± -		CAGE CODE	00779	-
ANGLES ± -		DRAWING NO	G= 1649637	-
FINISH -		RESTRICTED TO	-	-
MATERIAL -		CUSTOMER DRAWING	SCALE 5:1	SHEET 2 of 2
			REV C	



OJ-LM-WG CUSTOMER DRAWING