


OD280 Series



280 x 89mm
(11.0" x 3.5")

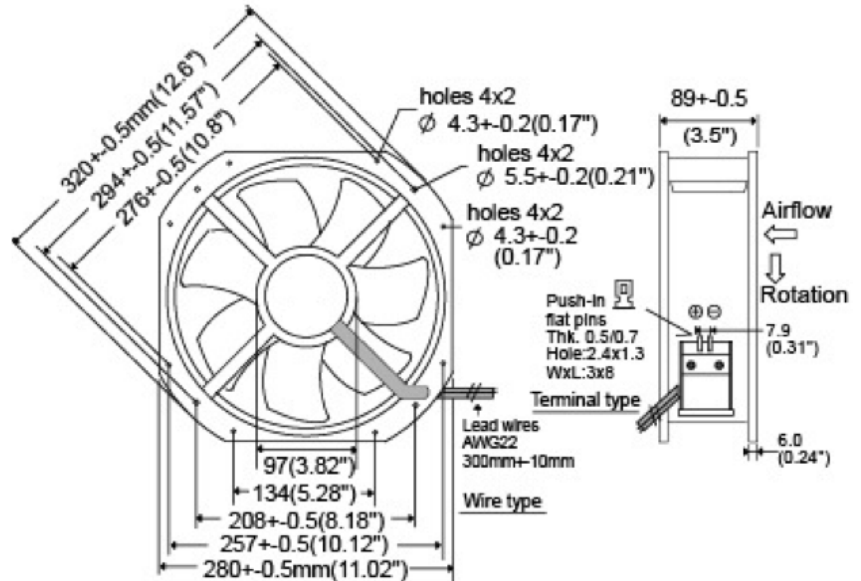

Frame	Diecast Aluminum	<u>Operating Temperature</u> Ball Bearing -15C ~ +65C <u>Life Expectancy</u> Ball Bearing 85,000 hours (L10 at 35C)	
Impeller	Glass Fiber reinforced thermoplastic.		
Connection	Terminals or lead wires		
Motor	Programmable microprocessor control Brushless DC, Locked rotor and polarity protected.		
Bearing System	Dual ball		
Weight	6.8 lbs (3100g)		
Dielectric Strength	500 VAC/sec., Max leakage 0.5mA		

Model Number	Speed (RPM)	Airflow (CFM)	Noise (dB)	Volts DC	Voltage Range	Watts	Max. Static Pressure ("H2O)
OD280-12HB *	2550	1200	72	12	9 ~ 13.5	135	0.90
OD280-12MB *	2200	950	56	12	9 ~ 13.5	90	0.65
OD280-12LB *	1800	780	48	12	9 ~ 13.5	62	0.55
OD280-24HB *	2550	1200	72	24	18 ~ 27	135	0.90
OD280-24MB *	2200	950	56	24	18 ~ 27	90	0.65
OD280-24LB *	1800	780	48	24	18 ~ 27	62	0.55
OD280-48HB *	2550	1200	72	48	24 ~ 55	135	0.90
OD280-48MB *	2200	950	56	48	24 ~ 55	90	0.65
OD280-48LB *	1800	780	48	48	24 ~ 55	62	0.55

* Indicate "TB" for terminal type or "WB" for Wire leads (300mm)

10557 Metric Drive
Dallas, Texas 75243
214-340-0265

RoHS Compliant

OrionFans.com
Information and data is subject to
change without prior notification.