


features

- Twelve standard resistance values
- Marking: 1J no marking on pink body, 2A and 2B black three digit on pink body color
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

dimensions and construction

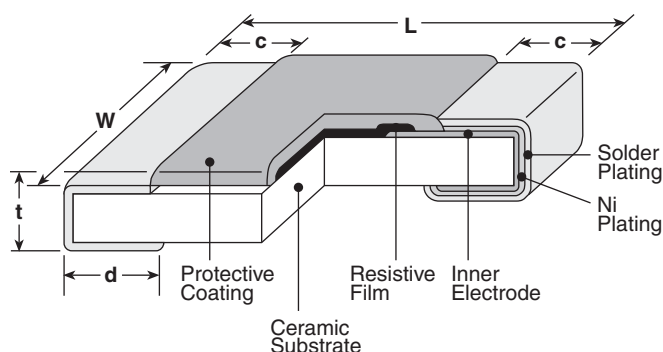

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.02±.004 (0.5±0.1)
2A (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 ^{+.008} _{-.004} (0.3 ^{+.02} _{-.01})	.02 ^{+.008} _{-.004} (0.5 ^{+.02} _{-.01})
2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.008 (0.5±0.3)	.016 ^{+.008} _{-.004} (0.4 ^{+.02} _{-.01})	.024±.004 (0.6±0.1)

ordering information

New Part #	NT73	2A	T	TD	103	K	3800	J
Type	Type	Size Code	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	B Constant Nominal	B Constant Tolerance
		1J: 0603 2A: 0805 2B: 1206	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape (5,000 pieces/reel)	2 significant figures + 1 multiplier	J: ±5% K: ±10% L: ±15%	3200 3500 3700 3800 3950 4100	H: ±3% J: ±5% K: ±10%

applications and ratings

Part Designation	Resistance @ 25°C	Resistance Tolerance	B Constant @ 25°C/75°C	B Constant Tolerance	Power Rating (mW)	Operating Temperature Range	
NT731J	6.8kΩ	J: ±5% K: ±10%	3500K	±10%	5	-55°C to +125°C	
	10kΩ			±5%			
	15kΩ		3800K				
	10kΩ		3700K	±3%			
	20kΩ		3800K	±5%			
	22kΩ						
	30kΩ						
	33kΩ						
	47kΩ						
	68kΩ						
100kΩ							
47kΩ	4100K	±3%					
NT732A	1kΩ	K: ±10% L: ±15%	3200K	±10%	5		
	2kΩ						
	2.2kΩ		3500K				±5%
	2.4kΩ						
	3.3kΩ						
	4.7kΩ						
	5kΩ						

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/30/10


applications and ratings (continued)

Part Designation	Resistance @ 25°C	Resistance Tolerance	B Constant @ 25°C/75°C	B Constant Tolerance	Power Rating (mW)	Operating Temperature Range
NT732A	6.8kΩ	K: ±10%; L: ±15%	3800K	±10%	5	-55°C to +125°C
	10kΩ	J: ±5% K: ±10% L: ±15%	3500K	±5%		
	15kΩ		3800K			
	10kΩ					
	20kΩ					
	22kΩ					
	30kΩ					
	33kΩ					
	47kΩ					
	68kΩ					
	100kΩ					
	150kΩ					
	50kΩ		3950K	±3%		
	10kΩ					
	15kΩ					
	20kΩ					
	22kΩ					
	30kΩ					
	33kΩ					
	47kΩ					
	68kΩ					
	100kΩ					
	150kΩ					
NT732B	1kΩ		K: ±10% L: ±15%	3200K	±10%	5
	2.2kΩ	3500K				
	3.3kΩ					
	4.7kΩ					
	6.8kΩ	J: ±5% K: ±10% L: ±15%		3800K		
	10kΩ					
	22kΩ					
	33kΩ					
	47kΩ					
	68kΩ					
	100kΩ					
	150kΩ					

Thermal dissipation constant - in the atmosphere - (reference) 1J: 2.0mW/°C, 2A: 2.8mW/°C, 2B: 3.0mW/°C

environmental applications

Temperature Characteristics

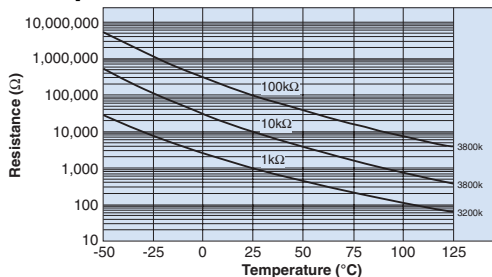

RT/R25 Ratio vs. B Constant

Resistance	1k Ω	5k Ω	10k Ω	100k Ω	10kΩ	Resistance	1k Ω	5k Ω	10k Ω	100k Ω	10kΩ
B Constant	3200K	3500K	3700K	3800K	4100K	B Constant	3200K	3500K	3700K	3800K	4100K
Temp. (°C)	Ω	k Ω	k Ω	k Ω	k Ω	Temp. (°C)	Ω	k Ω	k Ω	k Ω	k Ω
-55	38770	273.24	638.23	7692.5	1203.1	40	604.07	2.8809	5.5500	54.959	5.1999
-50	28840	197.67	465.81	5414.6	820.76	45	515.10	2.4202	4.6100	45.484	4.2349
-45	21706	144.85	343.25	3864.5	568.09	50	441.00	2.0421	3.8500	37.823	3.4692
-40	16517	107.43	255.22	2794.3	398.57	55	379.00	1.7302	3.2300	31.594	2.8585
-35	12698	80.577	191.37	2045.2	283.20	60	326.90	1.4718	2.7200	26.506	2.3692
-30	9857.0	61.077	144.64	1514.1	203.64	65	282.95	1.2568	2.3100	22.330	1.9721
-25	7721.2	46.759	110.13	1133.0	148.07	70	245.72	1.0771	1.9700	18.886	1.6504
-20	6100.5	36.137	83.710	856.49	108.37	75	214.08	0.92637	1.6800	16.035	1.3877
-15	4858.7	28.173	64.190	653.63	80.182	80	187.08	0.79937	1.4500	13.663	1.1724
-10	3899.0	22.147	49.640	503.31	59.943	85	163.96	0.69199	1.2500	11.682	0.99491
-5	3151.3	17.546	38.680	390.86	45.252	90	144.11	0.60087	1.0800	10.022	0.84926
0	2564.2	14.004	30.370	305.97	34.478	95	127.00	0.52329	0.94000	8.6257	0.72802
5	2099.9	11.256	23.970	241.34	26.473	100	112.21	0.45701	0.82000	7.4466	0.62662
10	1730.0	9.1063	19.070	191.73	20.506	105	99.377	0.40016	0.72000	6.4466	0.54156
15	1433.5	7.4135	15.270	153.36	16.016	110	88.224	0.35129	0.63000	5.5968	0.46982
20	1194.2	6.0712	12.320	123.46	12.608	115	78.501	0.30915	0.56000	4.8721	0.40906
25	1000.0	5.0000	10.000	100.00	10.000	120	70.004	0.27272	0.49000	4.2523	0.35741
30	841.48	4.1398	8.1700	81.470	7.9880	125	62.558	0.24114	0.44000	3.7207	0.31332
35	711.39	3.4451	6.7100	66.739	6.4242						

Performance Characteristics

Parameter	Requirement Δ R ±(%+0.05Ω)	Limit	Typical	Test Method
Resistance	Within specified tolerance	—	—	25°C
B Constant	Within specified tolerance	—	—	+25°C/+75°C
Resistance to Solder Heat	±1%, ±2%:1kΩ	±0.5%, ±1%:1kΩ	—	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±3.0%	±1.3%	—	-55°C (30 minutes), +125°C (30 minutes), 50 cycles
Moisture Resistance	±3.0%	±1.1%	—	40°C ± 2°C, 90 - 95% RH, 1000 hours
Load Life	±3.0%	±2.5%	—	80°C ± 3°C, DC5mW, 1000 hours
High Temperature Exposure	±3.0%	±1.6%	—	80°C, 1000 hours

Confirming resistance drift is recommended since this product has a tendency to have bigger resistance change than general flat chip over 80°C. Please pay attention not to be applied ESD, it may cause of resistance change.

Actual Value (Out of Guarantee)

Test Items	Reference	Test Method
High Temperature Exposure	±7.0%	125°C, 1000 hours
ESD	500V	Human model, 100 pF 1.5 kΩ