




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER MTRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH ±.3" [7]
MRT1.5LH-L4	50	1.5" [38]	2.3" [58]	10.6" [269]
MRT2LH-L4	50	2" [51]	2.8" [71]	12.2" [310]
MRT4LH-L4	50	4" [102]	4.8" [122]	18.5" [470]
MRT6LH-L4	50	6" [152]	6.8" [172]	24.8" [630]

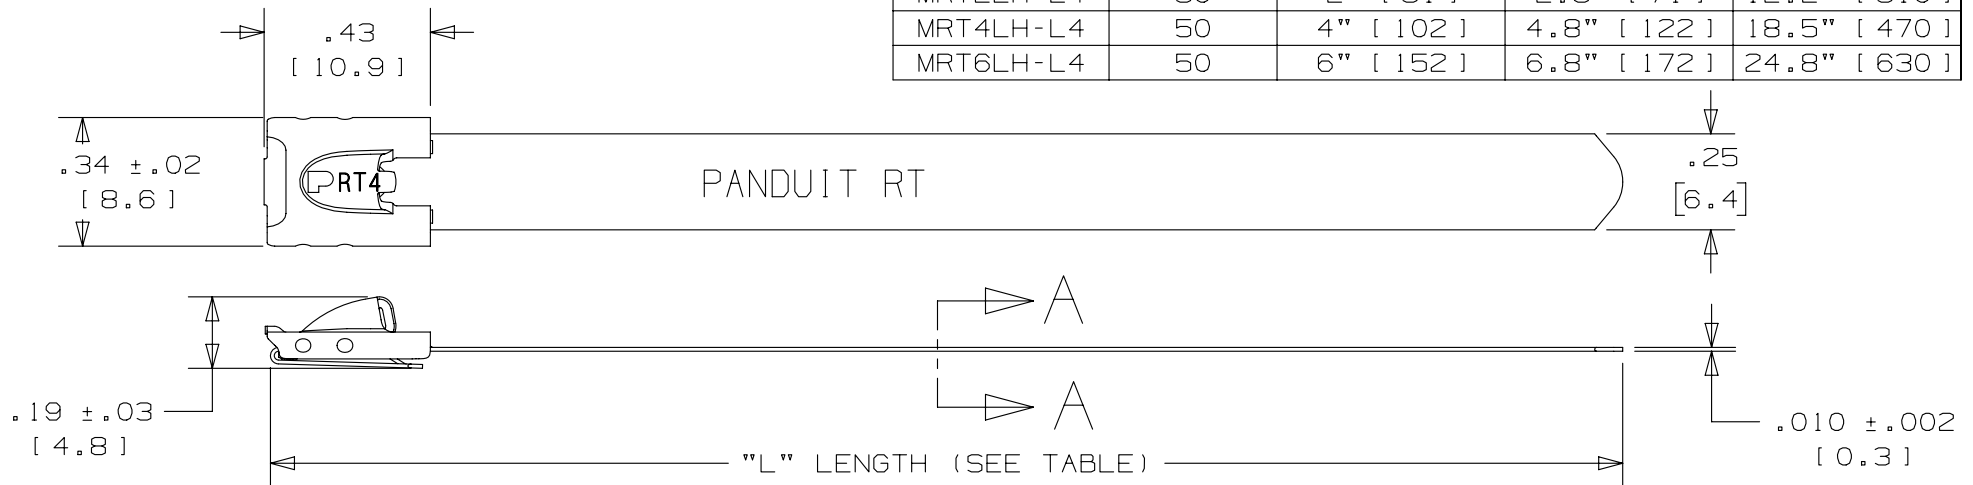

NOTES:

1. APPLICATION TOOLS - MTRTLS & PTRT
2. MINIMUM LOOP TENSILE STRENGTH - 225 LBS. [1000 NEWTONS] WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
.XXX = ±.010 [.25] .XX = ±.02 [.5]
.X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

TITLE												
METAL TIE - LIGHT/HEAVY SERIES RETAINED TENSION												
CUSTOMER DRAWING												
ITEM REVISION NAME												
N41249BS/06												
DATASET FILE NAME								MATERIAL: 304 STAINLESS STEEL				
N41249BS_DC/06A												
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °								DRAWING NUMBER: N41249BS_DC				
 THIRD ANGLE PROJECTION												
DRAWN BY		DATE		CHK		SCALE		SIZE				
JAMB		5/06		EJD		2:1		SHT 1 OF 1				
								A				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MRT1.5LH-L4](#) [MRT2LH-L4](#) [MRT4LH-L4](#) [MRT6LH-L4](#)