

# Miniature Snap-In Illuminated Rocker for Low Voltage Applications




## Features

- For Low Voltage Applications
- .250" Quick Connect Terminals



**S18**

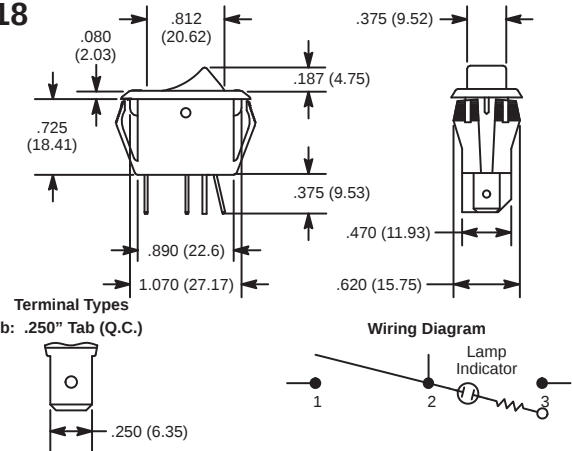

| NTE Type No. | Circuitry | Action |      |    | Actuator          | Lens Color | Diag No. |
|--------------|-----------|--------|------|----|-------------------|------------|----------|
| 54-083       | SPST      | OFF    | NONE | ON | Translucent Nylon | Red        | S18b     |
| 54-086       | SPST      | OFF    | NONE | ON | Clear Nylon       | Blue       | S18b     |

## Specifications


**Current Rating:** 10A 12VDC  
**Lamp Voltage:** 12V Incandescent  
**Insulation Resistance:** 100 Megohms (min.)  
**Dielectric Strength:** 1000V RMS (min.)  
**Temperature Rating:** +32° to +185°F (0° to +85°C)  
**Electrical Life:** 100,000 cycles  
**Mechanical Life:** 100,000 cycles  
**Terminal Type:** .250" Tab Q.C.  
**Mounting Hole:** 1.125 (28.58) x .550 (13.97)

# Miniature Snap-In Nylon Illuminated Rocker




## Features

- Single Pole
- .250" Quick Connect Terminals

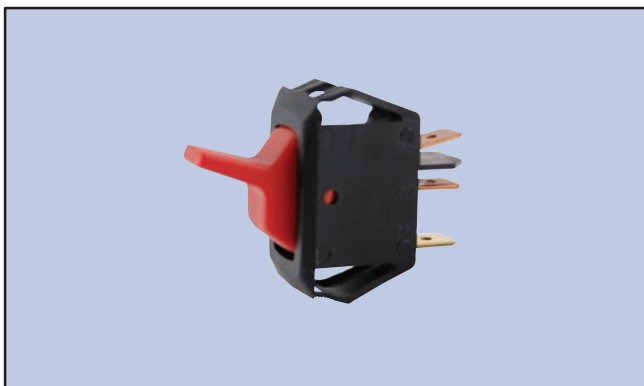

**S19**

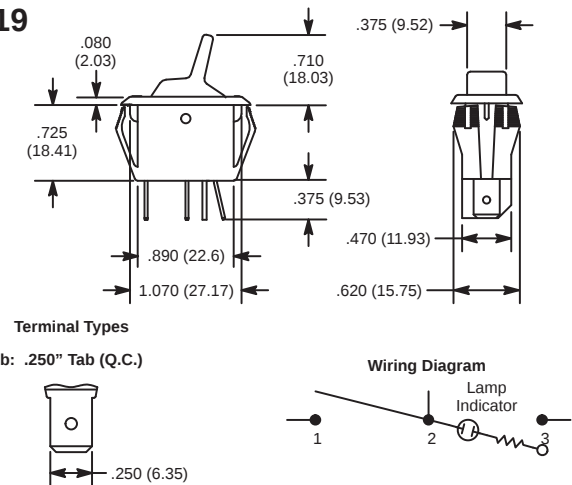

| NTE Type No. | Circuitry | Action |      |    | Actuator          | Lens Color | Diag No. |
|--------------|-----------|--------|------|----|-------------------|------------|----------|
| 54-105       | SPST      | OFF    | NONE | ON | Translucent Nylon | Amber      | S19b     |
| 54-106       | SPST      | OFF    | NONE | ON |                   | Red        | S19b     |

## Specifications

**Current Rating:** 16A 125VAC, 10A 250VAC, 10(4)A 250VAC°  
**Lamp Voltage:** 125V Neon  
**Insulation Resistance:** 100 Megohms (min.)  
**Dielectric Strength:** 1000V RMS (min.)  
**Temperature Rating:** +32° to +185°F (0° to +85°C)  
**Electrical Life:** 100,000 cycles  
**Mechanical Life:** 100,000 cycles  
**Terminal Type:** .250" Tab Q.C.  
**Mounting Hole:** 1.125 (28.58) x .550 (13.97)