

Interactive Catalog Supplements Catalog PDFs

If you need detailed product information, or help choosing the right product for your application, see our **Interactive Catalog**. Use the **Interactive Catalog** to access the most complete and up-to-date information available.

The **Interactive Catalog** provides an extensive collection of product specifications, application data, and technical literature that can be searched based on criteria you select.

This PDF catalog information was published in November 2000.



Sensing and Control
**Interactive
Catalog...**

**Click this icon to try
the Interactive Catalog.**

Sensing and Control

Honeywell Inc.

11 West Spring Street

Freeport, IL 61032

www.honeywell.com/sensing

Manual Switches

Solid State Pushbutton

MML11 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY



PWB Mount

FEATURES

- Hall effect reliability
- Provides low voltage signals that interface with nearly all DC logic
- Accepts one LED or incandescent lamp
- Printed wiring board mounting
- UL recognized, CSA certified
- Bezels and mounting clips, LEDs and legended lenses can be furnished installed or ordered separately

Example: MML11KK3AAKRSDR

Furnished with black bezel; mounting clips (long sides); red LED, and red lens installed.

MML11 ORDER GUIDE

Catalog listing codes for switch, less assembled display options

MML11K	A	3	AA
Housing Type (Rectangular) MML11K Black housing	Mounting K Black bezel, mtg. clip/long sides	Terminals 3 Printed wiring board	Circuitry/Action AA 5-24 VDC sinking mom. action


Manual Switches

Solid State Pushbutton Switches

MML11 Series

Electrical Data	page 56
Strip and matrix mounting	page 71
Mounting dimensions	page 79
PWB pin locations	page 79
LED/receptacle	pages 73/74
Lamp/LED/Lens	pages 75/76

Current Sinking Output
A permanent magnet plunger moves adjacent to the Hall effect integrated circuit to give a digital, current sinking (normally high and normally low) output.

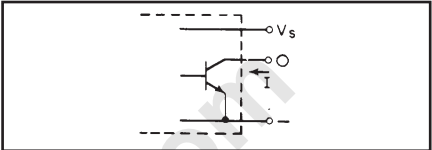

Order display options assembled to switch by adding codes below

K	RS	DR	Leave this space blank, <div style="border: 1px solid black; height: 15px; width: 100px;"></div>
Plunger <div style="border: 1px solid black; padding: 2px;">K Black</div>	LED (Stanley Type) <div style="border: 1px solid black; padding: 2px;"> XX No LED RS Red* YS Yellow* GS Green* </div> <p><small>* Permanently installed.</small></p>	Lens For LED display: DR Red DY Yellow DG Green For incandescent or non-lighted display: LR Red LY Yellow LG Green LW White LK Black	Legend 20 With Legend Use Legend Order Sheet FO-74024 to cover each catalog listing (see page 69).

CUSTOMER INSTALLATION:

LED

1. Order LED and receptacle, page 73.

2. Installation instructions, page 74/76.

Incandescent Lamp

1. Order lamp/PWB receptacle or lamp/solder receptacle, page 75.

2. Installation instructions, page 76.

Manuals