





P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $x.xx \pm 0.4$
 $x.xx \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. TRAVEL: 0.25 ± 0.1 mm
6. ELECTRICAL LIFE: 5,000,000 CYCLES.
7. INSULATION RESISTANCE: 100M ohms min.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲DENOTES CRITICAL PARAMETER
- ▲10. OPENING FORCE: 65 ± 20 GRAMS
11. PACKAGING: 1000 PCS PER POLYBAG
- ▲12. CONTACT MATERIAL: SILVER
13. 2002/95/EC (ROHS) COMPLIANT

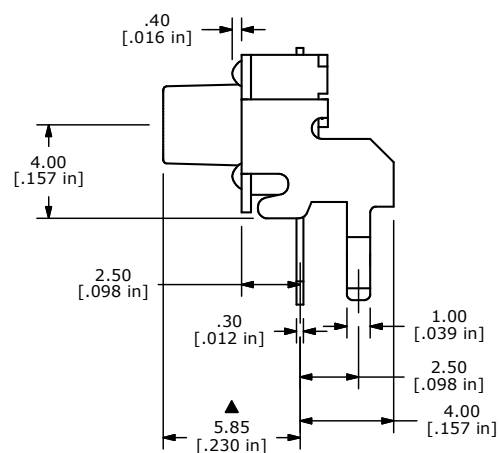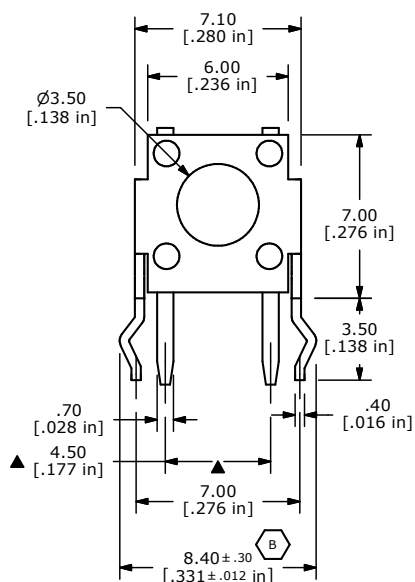

ISOMETRIC

B	18742	LEG TOLERANCE WAS +/- 0.1	1/4/2010	BLR
A	16650	RELEASED FOR PRODUCTION	11/20/06	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

 E-SWITCH® 				
TITLE LL1105XF065Q				
SCALE 4:1	DATE 1/4/2010	DR BLR	DWG P010245	REV B