

40 WATT LD40WXXX -TL

CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS



PHASE DIMMING
LD40WXXX -TL
40W

Model: LD40WXXX -TL Series

- Designed for use with Triac and ELV Dimmers 120Vac or 230Vac/240Vac/277Vac.
- Drive Mode: Constant Current with CCR Dimming
- Output Power: 40W Max.
- Input Voltage: 120Vac 50/60Hz or 230Vac 50/60Hz
- Number of Outputs: One
- Output Voltages: 12VDC - 114VDC
- Output Currents: 350mA - 1670mA

Environmental

1. Operating temperature: Tc 85C Maximum. Reference -30 to +50°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 40°C: 375,000 hours @ Full Load per MIL-217F Notice 2.

Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety compliant
2. FCC, 47CFR Part 15 Class B compliant
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp, Wet Locations.
4. Compact, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery
8. EN614000-4-5: 2kV/4kV 8/20 usec transient protection.

Electrical Specifications at 25°C

- Input Voltage: 120Vac Version 90-135Vac, 230Vac Version 180-305Vac
- Frequency: 50/60Hz
- Power Factor: > 0.90 at 120Vac, Full Load (No dimmer)
- Inrush current: <15A at 25C, 120Vac, cold start, Max. Load
- Input current: 0.40A at 120Vac, 60Hz, Maximum Load
- Efficiency: 84% typical at 120Vac 60Hz
- Maximum output power: 40W
- Line regulation accuracy: $\pm 3\%$
- Load regulation accuracy: $\pm 5\%$
- Dimming Range: CCR Mode See Graph page 2.



IP66



120Vac Input Versions

Part Number	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency (1)	DIMMER ⁽³⁾
LD40W120-114-C0350-TL	NO	NO	57 - 114 VDC	350 mA	$\pm 5\%$	40W	85%	Incan & ELV
LD40W120-54-C0700-TL	YES	NO	27 - 54 VDC	700 mA	$\pm 5\%$	40W	85%	Incan & ELV
LD40W120-40-C1000-TL	YES	NO	20 - 40 VDC	1000 mA	$\pm 5\%$	40W	84%	Incan & ELV
LD40W120-36-C1100-TL	YES	YES	18 - 36 VDC	1100 mA	$\pm 5\%$	40W	84%	Incan & ELV
LD40W120-30-C1300-TL	YES	YES	15 - 30 VDC	1300 mA	$\pm 5\%$	40W	83%	Incan & ELV
LD40W120-24-C1670-TL	YES	YES	12 - 24 VDC	1670 mA	$\pm 5\%$	40W	82%	Incan & ELV

230Vac Input Versions

Part Number	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency (1)	DIMMER ⁽⁴⁾
LD40W230-114-C0350-TL	NO	NO	57 - 114 VDC	350 mA	$\pm 5\%$	40W	86%	Incan & ELV
LD40W230-54-C0700-TL	YES	NO	27 - 54 VDC	700 mA	$\pm 5\%$	40W	86%	Incan & ELV
LD40W230-40-C1000-TL	YES	NO	20 - 40 VDC	1000 mA	$\pm 5\%$	40W	85%	Incan & ELV
LD40W230-36-C1100-TL	YES	YES	18 - 36 VDC	1100 mA	$\pm 5\%$	40W	85%	Incan & ELV
LD40W230-30-C1300-TL	YES	YES	15 - 30 VDC	1300 mA	$\pm 5\%$	40W	84%	Incan & ELV
LD40W230-24-C1670-TL	YES	YES	12 - 24 VDC	1670 mA	$\pm 5\%$	40W	83%	Incan & ELV

Notes

1. Typical efficiency measured at 120Vac or 230Vac input, full load, no dimmer.
2. All versions are $\leq 10\%$ to $\approx 100\%$ CCR Dimmable with any good quality proper power phase dimmer.
3. Use any good quality 120VAC $\leq 600W$ Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.
4. Use any good quality 230/240VAC $\leq 500W$ Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.

Custom designs available. Please consult the factory.

Specifications subject to change without notice

40W

LD40WXXX-TL

PHASE DIMMING




LED Optimized Drivers Triac & ELV Dimmable

40 WATT LD40WXXX-TL


CONSTANT CURRENT TRIAC & ELV DIMMABLE LED DRIVERS

Typical Dimming Curve:

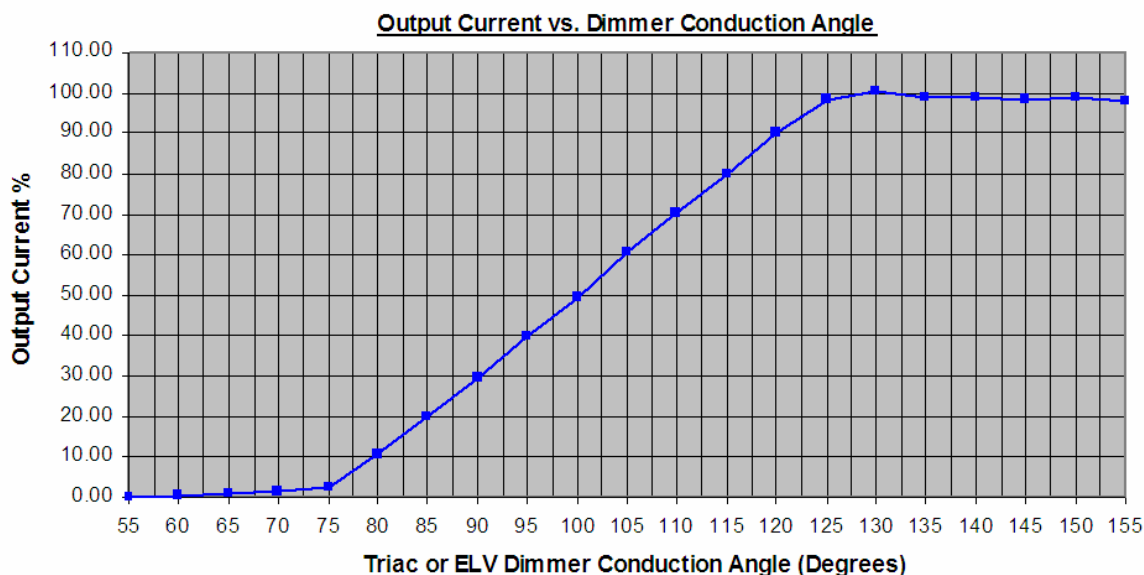

Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case
Fully Encapsulated
Weight: 311 grams (11.0 oz) Typical

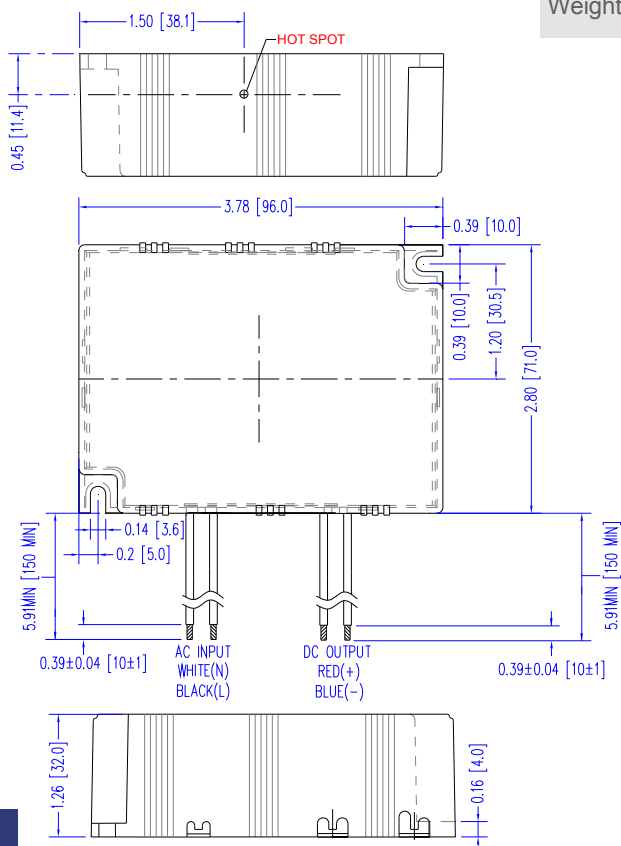

Labeling Example



Specifications subject to change without notice

Custom designs available. Please consult the factory.