



- **Water Repellent When Properly Sealed**
- **Will Not Support Growth Of Bacteria**
- **Disinfects Easily**
- **Adhesive Resists Most Cleaners And Disinfectants**

4' Pcs. Put-Ups

Nominal Size	Part #	Wall Thickness	Bulk Box	Box 8x8	Box 6x6	Box 4x4	Available Colors	Lbs/ 10Pcs.
3/8"	L6N0.38	0.046"	250	90	50	30	2	0.9
1/2"	L6N0.50	0.046"	250	70	40	25	2	1.0
3/4"	L6N0.75	0.046"	125	50	30	15	2	1.8
1"	L6N1.00	0.046"	88	30	20	9	2	2.2
1 1/4"	L6N1.25	0.046"	63	20	10	6	2	2.6



Cut Cleanly
Hot Knife

Material

Laminated Polyester

Grade

L6N

Monofilament Diameter

NA

Stylish Fluid Protection For Wires & Cables


Our new L6 Liquid Wrap semi-rigid wraparound sleeving is engineered from tough braided polyester, and laminated with a layer of strong Mylar sheeting. This combination provides a strong and lightweight solution for any application that requires protection from repeated exposure to the elements.

The wraparound construction, with 12% edge overlap makes installation easy over existing assemblies or harnesses, and the extra wide adhesive strip ensures a positive, aggressive seal against damage from exposure.

L6 is available in 4' pre-cut sticks in Black or White.

L6 is ideal for marine and automotive wiring harnesses, and also for cable management in medical applications.

Colors Available:
2 = BK & WH

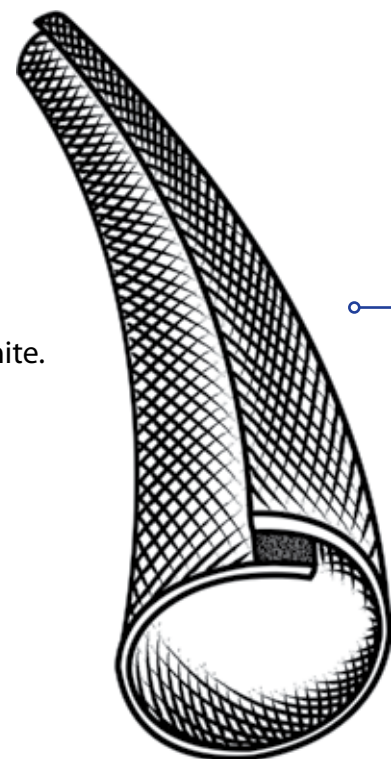



ABRASION

**Abrasion Resistance
High**

**Material Destroyed-
Braid Worn Through in
Both Directions
10,338 Test Cycles**

CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	2
Weak Bases _____	1
Salts _____	1
Strong Bases _____	3
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None


Melt Point
ASTM D-2117

482°F (250°C)

Maximum Continuous
Mil-I-23053

257°F (125°C)

Minimum Continuous
-94°F (-70°C)

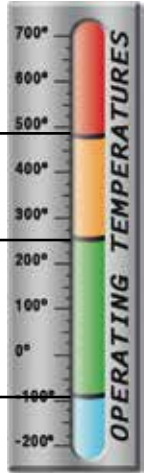

PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
ASTM D-204	
Flammability Rating _____	
FMVSS-302 Approved	
Recommended Cutting _____	Scissor
Colors _____	1
Wall Thickness _____	.046
Tensile Strength (Yarn) _____	
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.38
Moisture Absorption _____	.1-.2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.19
CVCM _____	.00
WVR _____	.16
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	

© 2016 Techflex, Inc. - Any unauthorized reproduction, in whole or part, in any medium whatsoever, without the express written permission of Techflex, Inc. is strictly forbidden.

Techflex product names and logos are registered trademarks of Techflex, Inc., unless otherwise attributed. The contents and illustrations contained herein are believed to be reliable. Techflex makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Techflex's only obligations are those in standard terms of sale for these products and Techflex will not be liable for any consequential or other damages arising due to misuse of these products or typographical errors or omissions.

Users should make their own evaluation to determine the suitability of these products for their unique and specific applications.