
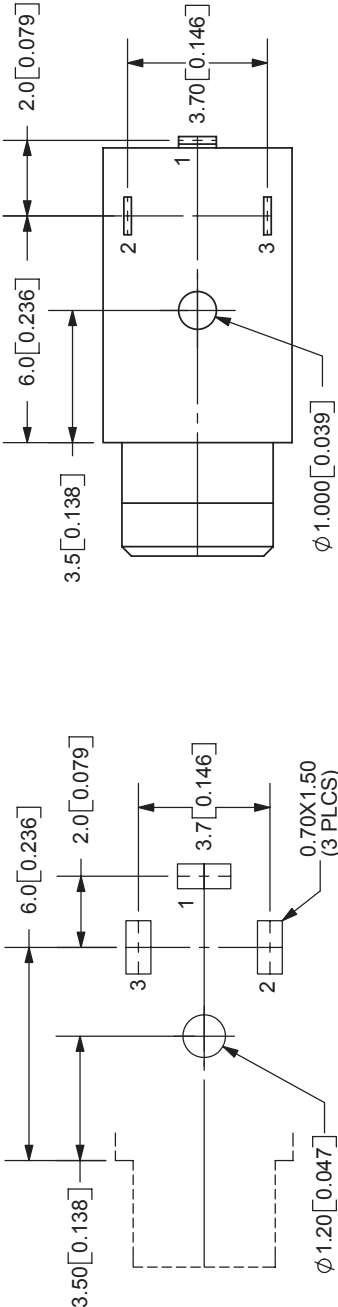


REV.	DESCRIPTION	DATE
A	NEW DRAWING	1/18/2006

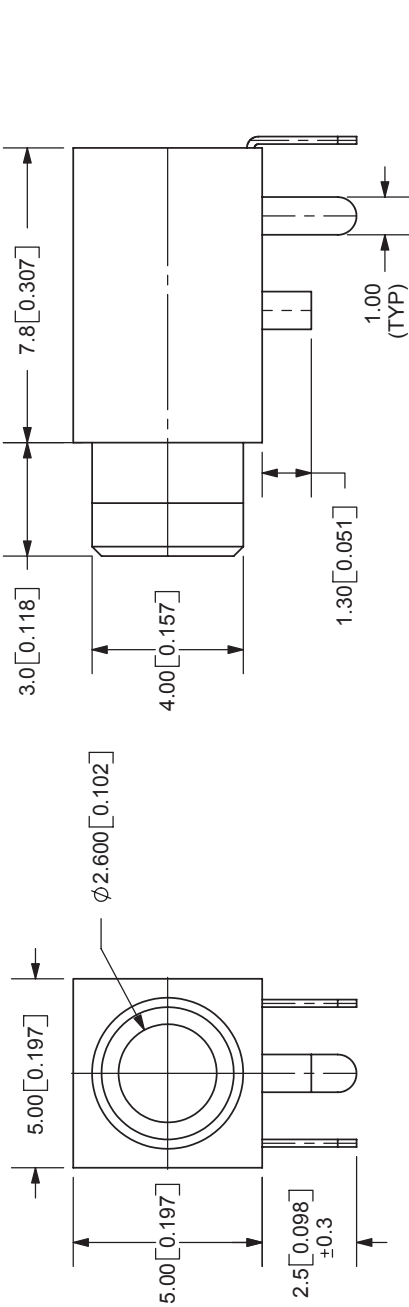


PCB LAYOUT
TOP VIEW

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

MODEL NO.	MJ1-2503A
SCHEMATIC	

TERMINAL 1	MATERIAL	PLATING
TERMINAL 2	Brass	Tin
TERMINAL 3	Copper Alloy	Tin
TERMINAL 3	Copper Alloy	Tin
BUSHING	Brass	Nickel
HOUSING	PBT	



TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm



20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

TITLE: 2.5mm PHONE JACK	REV: A
PART NO: MJ1-2503A	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
SCALE: 4:1	