
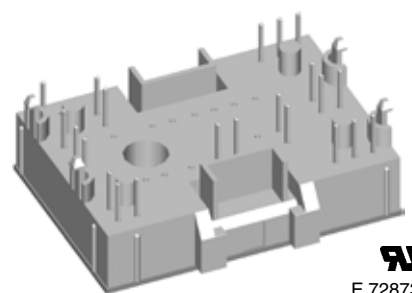


Converter - Brake - Inverter Module Trench IGBT

Single Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 600 \text{ V}$	$V_{CES} = 600 \text{ V}$
$I_{DAVM25} = 90 \text{ A}$	$I_{C25} = 29 \text{ A}$	$I_{C25} = 29 \text{ A}$
$I_{FSM} = 270 \text{ A}$	$V_{CE(sat)} = 2.1 \text{ V}$	$V_{CE(sat)} = 2.1 \text{ V}$

Part name (Marking on product)

MITA30WB600TMH

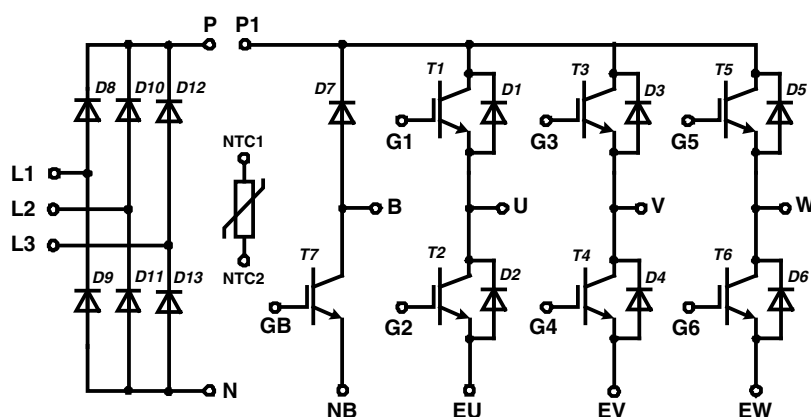


E 72873

Pin configuration see outlines.

Features:

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with Trench IGBTs
 - low saturation voltage
 - positive temperature coefficient
 - fast switching
 - short tail current
- Epitaxial free wheeling diodes with hiperfast soft reverse recovery
- Temperature sense included

Application:

- AC motor drives
- Pumps, Fans
- Washing machines
- Air-conditioning system
- Inverter and power supplies

Package:

- "Mini" package
- Assembly height is 17 mm
- Insulated base plate
- Pins suitable for wave soldering and PCB mounting
- Assembly clips available
 - IXKU 5-505 screw clamp
 - IXRB 5-506 click clamp
- UL registered E72873

Output Inverter T1 - T6

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_{CES}	collector emitter voltage	$T_{VJ} = 150^{\circ}\text{C}$			600		V
V_{GES}	max. DC gate voltage	continuous			± 20		V
V_{GEM}	max. transient collector gate voltage	transient			± 30		V
I_{C25}	collector current	$T_C = 25^{\circ}\text{C}$			40		A
I_{C80}		$T_C = 80^{\circ}\text{C}$			27		A
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$			90		W
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 30\text{ A}; V_{GE} = 15\text{ V}$		1.5 1.7	1.8 1.9		V V
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 0.45\text{ A}; V_{GE} = V_{CE}$	5		6.5		V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	1.8 2	2.25 5		mA mA
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20\text{ V}$			300		nA
C_{ies}	input capacitance	$V_{CE} = 25\text{ V}; V_{GE} = 0\text{ V}; f = 1\text{ MHz}$		1630			pF
$Q_{G(on)}$	total gate charge	$V_{CE} = 300\text{ V}; V_{GE} = 15\text{ V}; I_C = 10\text{ A}$		300			nC
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 600\text{ V}; I_C = 30\text{ A}$ $V_{GE} = \pm 15\text{ V}; R_G = 15\ \Omega$	$T_{VJ} = 25^{\circ}\text{C}$	tbd			ns
t_r	current rise time			tbd			ns
$t_{d(off)}$	turn-off delay time			tbd			ns
t_f	current fall time			tbd			ns
E_{on}	turn-on energy per pulse			tbd			mJ
E_{off}	turn-off energy per pulse			tbd			mJ
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 600\text{ V}; I_C = 30\text{ A}$ $V_{GE} = \pm 15\text{ V}; R_G = 15\ \Omega$	$T_{VJ} = 125^{\circ}\text{C}$	20			ns
t_r	current rise time			20			ns
$t_{d(off)}$	turn-off delay time			160			ns
t_f	current fall time			60			ns
E_{on}	turn-on energy per pulse			0.65			mJ
E_{off}	turn-off energy per pulse			0.75			mJ
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15\text{ V}; R_G = 15\ \Omega; I_C = 60\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$	$V_{CEK} \leq V_{CES} - L_S \cdot di/dt$			V
t_{SC} (SCSOA)	short circuit safe operating area	$V_{CE} = 360\text{ V}; V_{GE} = \pm 15\text{ V};$ $R_G = 15\ \Omega; t_p = 10\ \mu\text{s};$ non-repetitive	$T_{VJ} = 125^{\circ}\text{C}$	10			μs
R_{thJC}	thermal resistance junction to case	(per IGBT)			1.4		K/W
R_{thCH}	thermal resistance case to heatsink			0.5			K/W

Output Inverter D1 - D6

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^{\circ}\text{C}$			600		V
I_{F25}	forward current	$T_C = 25^{\circ}\text{C}$			69		A
I_{F80}		$T_C = 80^{\circ}\text{C}$			46		A
V_F	forward voltage	$I_F = 30\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	1.2	1.7 1.4		V V
Q_{rr}	reverse recovery charge	$V_R = \text{tbd V}$ $di_F/dt = \text{tbd A}/\mu\text{s}$ $I_F = \text{tbd A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$	tbd			μC
I_{RM}	max. reverse recovery current			tbd			A
t_{rr}	reverse recovery time			tbd			ns
E_{rec}	reverse recovery energy			tbd			μJ
R_{thJC}	thermal resistance junction to case	(per diode)			0.9		K/W
R_{thCH}	thermal resistance case to heatsink			0.3			K/W

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20100906b

Brake T7

				Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	Unit	
V_{CES}	collector emitter voltage	$T_{VJ} = 150^{\circ}\text{C}$			600	V	
V_{GES}	max. DC gate voltage	continuous			± 20	V	
V_{GEM}	max. transient collector gate voltage	transient			± 30	V	
I_{C25}	collector current	$T_C = 25^{\circ}\text{C}$			40	A	
I_{C80}		$T_C = 80^{\circ}\text{C}$			27	A	
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$			90	W	
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 30\text{ A}; V_{GE} = 15\text{ V}$		1.5 1.7	1.8 1.9	V	
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 0.45\text{ A}; V_{GE} = V_{CE}$	5		6.5	V	
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0\text{ V}$		1	2 4	mA mA	
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20\text{ V}$			300	nA	
C_{ies}	input capacitance	$V_{CE} = 25\text{ V}; V_{GE} = 0\text{ V}; f = 1\text{ MHz}$		1630		pF	
$Q_{G(on)}$	total gate charge	$V_{CE} = 300\text{ V}; V_{GE} = 15\text{ V}; I_C = 10\text{ A}$		300		nC	
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 600\text{ V}; I_C = 30\text{ A}$ $V_{GE} = \pm 15\text{ V}; R_G = 15\text{ }\Omega$	$T_{VJ} = 25^{\circ}\text{C}$	tbd		ns	
t_r	current rise time			tbd		ns	
$t_{d(off)}$	turn-off delay time			tbd		ns	
t_f	current fall time			tbd		ns	
E_{on}	turn-on energy per pulse			tbd		mJ	
E_{off}	turn-off energy per pulse			tbd		mJ	
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 600\text{ V}; I_C = 30\text{ A}$ $V_{GE} = \pm 15\text{ V}; R_G = 15\text{ }\Omega$	$T_{VJ} = 125^{\circ}\text{C}$	20		ns	
t_r	current rise time			20		ns	
$t_{d(off)}$	turn-off delay time			160		ns	
t_f	current fall time			60		ns	
E_{on}	turn-on energy per pulse			0.65		mJ	
E_{off}	turn-off energy per pulse			0.75		mJ	
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15\text{ V}; R_G = 15\text{ }\Omega; I_C = 60\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$	$V_{CEK} \leq V_{CES} - L_S \cdot di/dt$		V	
t_{SC} (SCSOA)	short circuit safe operating area	$V_{CE} = 360\text{ V}; V_{GE} = \pm 15\text{ V};$ $R_G = 15\text{ }\Omega; t_p = 10\text{ }\mu\text{s};$ non-repetitive	$T_{VJ} = 125^{\circ}\text{C}$	10		A	
R_{thJC}	thermal resistance junction to case	(per IGBT)		0.45	1.4	K/W	
R_{thCH}	thermal resistance case to heatsink					K/W	

Brake Chopper D7

				Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	Unit	
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^{\circ}\text{C}$			600	V	
I_{F25}	forward current	$T_C = 25^{\circ}\text{C}$			22	A	
I_{F80}		$T_C = 80^{\circ}\text{C}$			14	A	
V_F	forward voltage	$I_F = 30\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	1.65 1.60	2.47 1.99	V	
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	50 0.2	60 0.25	μA mA	
Q_{rr}	reverse recovery charge	$V_R = 300\text{ V}$ $di_F/dt = -400\text{ A}/\mu\text{s}$ $I_F = 10\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$	tbd		μC	
I_{RM}	max. reverse recovery current			11		A	
t_{rr}	reverse recovery time			80		ns	
E_{rec}	reverse recovery energy			tbd		μJ	
R_{thJC}	thermal resistance junction to case	(per diode)		0.85	2.5	K/W	
R_{thCH}	thermal resistance case to heatsink					K/W	

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20100906b

Input Rectifier Bridge D8 - D11

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 25^{\circ}\text{C}$			1600		V
I_{FAV}	average forward current	sine 180°	$T_C = 80^{\circ}\text{C}$		31		A
I_{DAVM}	max. average DC output current	rect.; $d = 1/3$	$T_C = 80^{\circ}\text{C}$		89		A
I_{FSM}	max. forward surge current	$t = 10\text{ ms}$; sine 50 Hz	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		320 280		A A
I^2t	I^2t value for fusing	$t = 10\text{ ms}$; sine 50 Hz	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		510 390		A^2s A^2s
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$		80		W
V_F	forward voltage	$I_F = 30\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	1.2 1.1	1.50 1.21		V V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	20 1.5			μA mA
R_{thJC}	thermal resistance junction to case	(per diode)		0.45	1.4		K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)					K/W


Temperature Sensor NTC

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
R_{25}	resistance	$T_C = 25^{\circ}\text{C}$	4.75	5.0	5.25		k Ω
$B_{25/50}$				3375			K

Module

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
T_{VJ}	operating temperature		-40		125		$^{\circ}\text{C}$
T_{VJM}	max. virtual junction temperature				150		$^{\circ}\text{C}$
T_{stg}	storage temperature		-40		125		$^{\circ}\text{C}$
V_{ISOL}	isolation voltage	$I_{ISOL} \leq 1\text{ mA}$; 50/60 Hz			2500		V~
CTI	comparative tracking index			-			
F_C	mounting force		40		80		N
d_S	creep distance on surface		12.7				mm
d_A	strike distance through air		12				mm
Weight				35			g

Equivalent Circuits for Simulation




Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_0 R_0	rectifier diode	D8 - D13	$T_{VJ} = 125^{\circ}\text{C}$	0.9 9			V m Ω
V_0 R_0	IGBT	T1 - T6	$T_{VJ} = 125^{\circ}\text{C}$	0.9 20			V m Ω
V_0 R_0	free wheeling diode	D1 - D6	$T_{VJ} = 125^{\circ}\text{C}$	1.05 7			V m Ω
V_0 R_0	IGBT	T7	$T_{VJ} = 125^{\circ}\text{C}$	0.9 20			V m Ω
V_0 R_0	free wheeling diode	D7	$T_{VJ} = 125^{\circ}\text{C}$	1.25 25			V m Ω

IXYS reserves the right to change limits, test conditions and dimensions.

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated


20100906b

Circuit Diagram

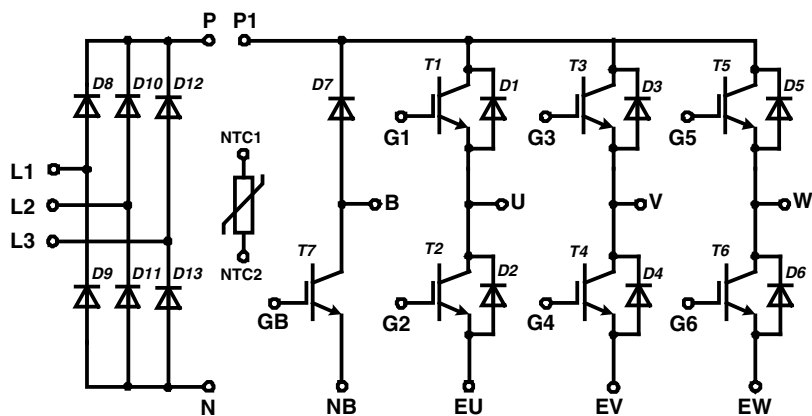


Outline Drawing

Dimensions in mm (1 mm = 0.0394")

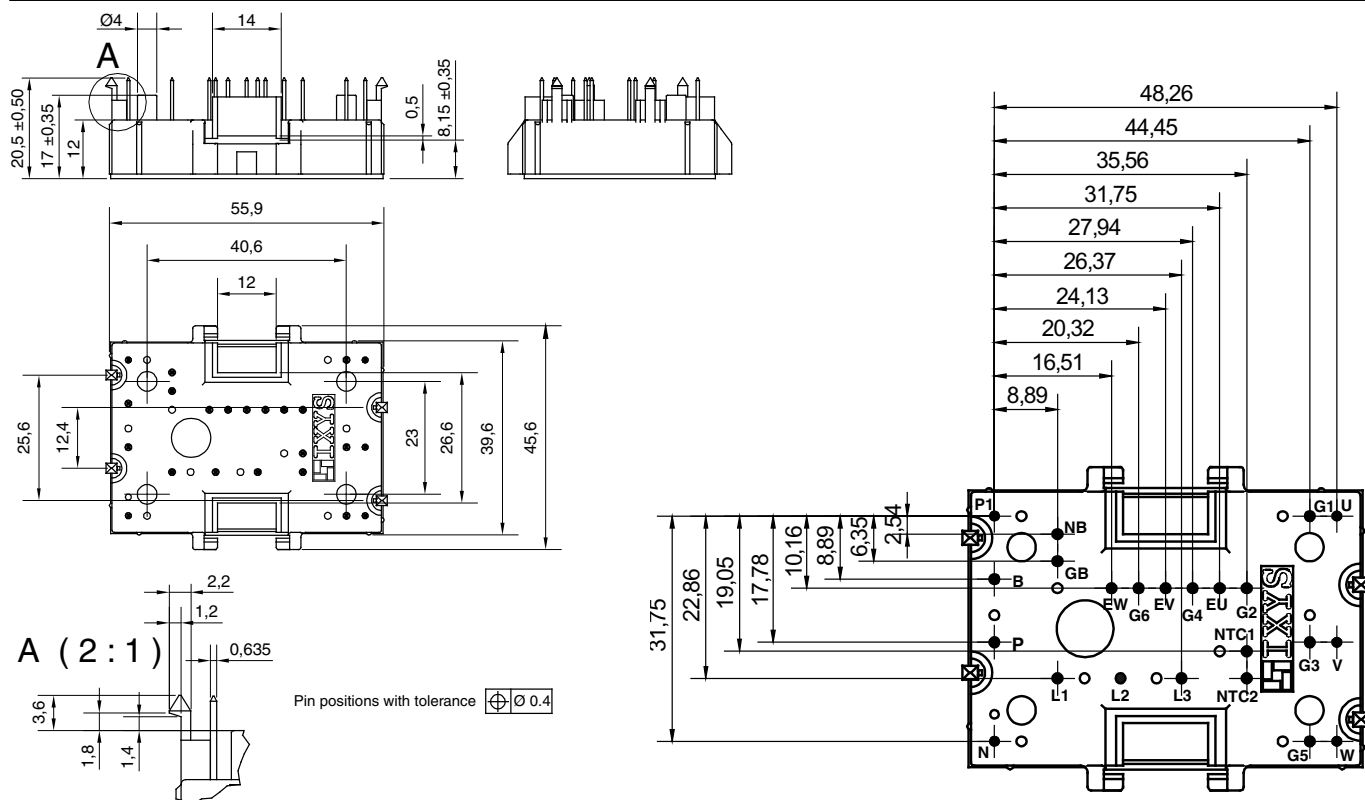

Product Marking



Part number

M = Module
 I = IGBT
 T = Standard trench
 A = Gen 1 / std
 30 = Current Rating [A]
 WB = 6-Pack + 3~ Rectifier Bridge & Brake Unit
 600 = Reverse Voltage [V]
 T = NTC
 MH = MiniPack2

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MITA 30 WB 600 TMH	MITA30WB600TMH	Box	20	505721

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[MITA30WB600TMH](#)