


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PBT
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	6.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	12x18 AWG
DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL SHIELD
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	IEC IP67

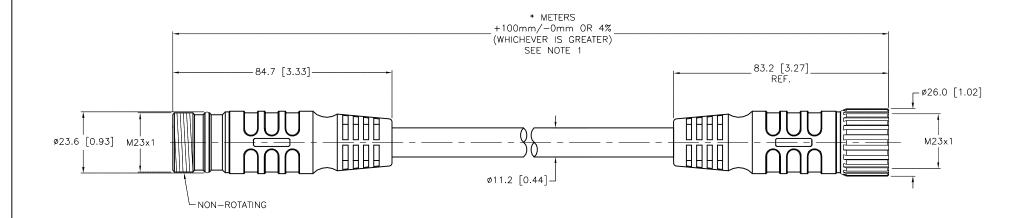

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 3RD ANGLE THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS 3000 CAMPUS DRIVE PROJECTION MINNEAPOLIS, MN 55441 turck inc 1-800-544-7769 2. (763) 553-7300 DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. High Technology Sensors and Automation Controls 3. NOTES: (763) 553-0708 fax turck.com 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER MATERIAL DATE 02/27/07 RDS SPECIFIC LENGTHS. CSSM CKM 12-12-*/S817 SCALE 1=1.5 ALL DIMENSIONS APVD DISPLAYED ON THIS DRAWING ARE FOR SEE SPECIFICATIONS 2. "/S817" DESIGNATES SPECIAL COLOR CODE. UNIT OF MEASUREMENT REFERENCE ONLY IDENTIFICATION NO. REV FINISH CONTACT TURCK FOR MORE INFORMATION MILLIMETER [INCH] UPDATE CABLE DIAMETER KMY 02/14/13 40654 SEE SPECIFICATIONS DESCRIPTION FILE: 777008953 SHEET 1 OF 1 DATE ECO NO. DO NOT SCALE THIS DRAWING