




No locking structure 20 48.26 56.26 61.21 67.3 3.3

Ordering code

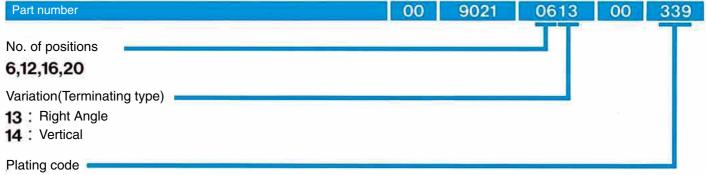

Vertical






3.96



Mating dimensions Connection of a board and board

Connection of a board and crimped wire

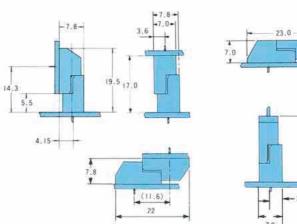


SERIES


Single row type with no flange for printed circuit boards

Mounting dimensions on the P.C.board


Vertical



Right Angle



Right Angle 6.0

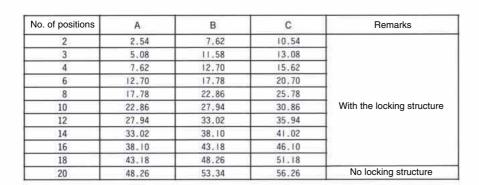

B ± 0.15 -


Ordering code

9021 339 Part number 00 0211 00 No. of positions 2,3,4,6,8,10,12,14,16,18,20 Variation(Terminating type) 11: Right Angle


12: Vertical (Note: 20Pos. is Right Angle type only.)

Plating code


Vertical

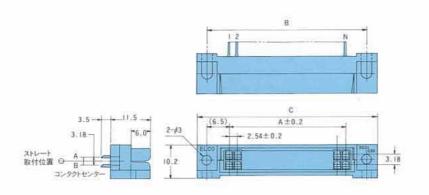

SERIES 9021 Dual type for printed circuit boards

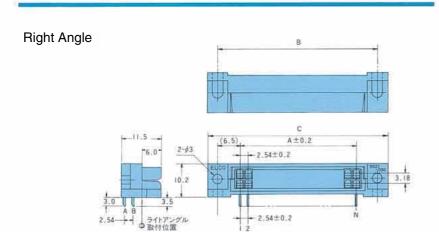

| No. of positions | Α | В | С |
|------------------|-------|-------|-------|
| 14(7/7) | 15.24 | _ | 23.24 |
| 20 (10/10) | 22.86 | 35.81 | 41.9 |
| 26(13/13) | 30.48 | 43.43 | 49.5 |
| 30 (15/15) | 35.56 | 48.51 | 54.6 |
| 36(18/18) | 43.18 | 56.13 | 62.2 |
| 40 (20/20) | 48.26 | 61.21 | 67.3 |

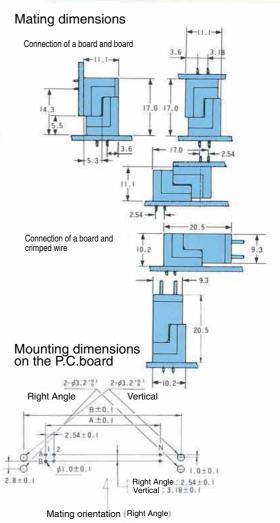


Ordering code

| f naci | tions | | | |
|--|--|--|----|--|
| of posi | tions | | | |
| 0.26 | 5,30,36,40 | | | |
| | | | | |
| tion(T | erminating type) | | -8 | |
| | | | | |
| 21 | Right Angle type with no flange (only for 14-contact) | | | |
| and the latest and th | | | | |
| 22 | Vertical type with no flange (only for 14-contact) | | | |
| | Vertical type with no flange (only for 14-contact) Right Angle type with the flange | | | |

Plating code

Crimp type

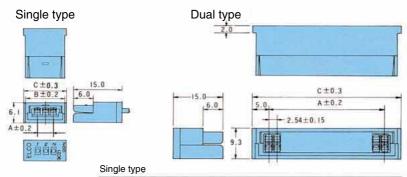

SERIES 9021 Insulator

Dual type

| No. of positions | Α | С |
|------------------|-------|--------|
| 14(7/7) | 15.24 | 23.30* |
| 20(10/10) | 22.86 | 32.86 |
| 26(13/13) | 30.48 | 40.48 |
| 30(15/15) | 35.56 | 45.56 |
| 36(18/18) | 43.18 | 53.18 |
| 40(20/20) | 48.26 | 58.26 |


*with no flange


(Note) the location of flange for 14-position type is different from others.

Dua

| No. of positions | Α | В | С |
|------------------|-------|-------|------|
| 2 | 2.54 | 10.54 | 12.5 |
| 3 | 5.08 | 13.08 | 15.1 |
| 4 | 7.62 | 15.62 | 17.6 |
| 6 | 12.70 | 20.70 | 22.7 |
| 8 | 17.78 | 25.78 | 27.8 |
| 10 | 22.86 | 30.86 | 32.9 |
| 12 | 27.94 | 35.94 | 37.9 |
| 14 | 33.02 | 41.02 | 43.0 |
| 16 | 38.10 | 46.10 | 48.1 |
| 18 | 43.18 | 51.18 | 53.2 |
| 20 | 48.26 | 56.26 | 58.2 |

Panel mounted type







Ordering code Crimp type

| Chilip type | | | | |
|---|---------------------|----------------------|------|--------|
| Part number | 60 | 9021 | 3024 | 10 000 |
| No. of positions Single type :2,3,4, Dual type :14,20 | 6,8,10,1 ,26,30, | 12,14,16,18 36,40 | ,20 | ΙT |
| Variation 1: Single type 2: Dual type | | | | - |
| Color code ———————————————————————————————————— | | | | |

| No. of positions | Α | В | С | |
|------------------|-------|-------|-------|--|
| 2 | 2.54 | 15.74 | 19.34 | |
| 3 | 5.08 | 18.28 | 21.88 | |
| 4 | 7.62 | 20.82 | 24.42 | |
| 6 | 12.70 | 25.90 | 29.50 | |
| 8 | 17.78 | 30.98 | 34.58 | |
| 10 | 22.86 | 36.06 | 39.66 | |
| 12 | 27.94 | 41.14 | 44.74 | |

Shape of the panel to be mounted





Panel mounted type

| Part number | 60 | 9021 | 3028 | 16 | 000 |
|----------------------------------|----------|-------|------|----|-----|
| No. of positions 2,3,4,6,8,10,12 | - | | | | T |
| Color code | | | | | |
| 000:Green 001:Wh | ite 002: | Black | | | |

Contact

| Part number | 60 | 9021 | 0313 | 00 | 339 | |
|--|----|------|------|----|-----|--|
| Variation = | | | | | | |
| 0313 00: Contacts loose | | | | | | |
| 0323 99: Reeled Contacts(10,000 contacts per reel) | | | | | | |
| Plating code | | | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

 $609021031300339 \ 609021306410000 \ 009021262300339 \ 009021262300339 +$