

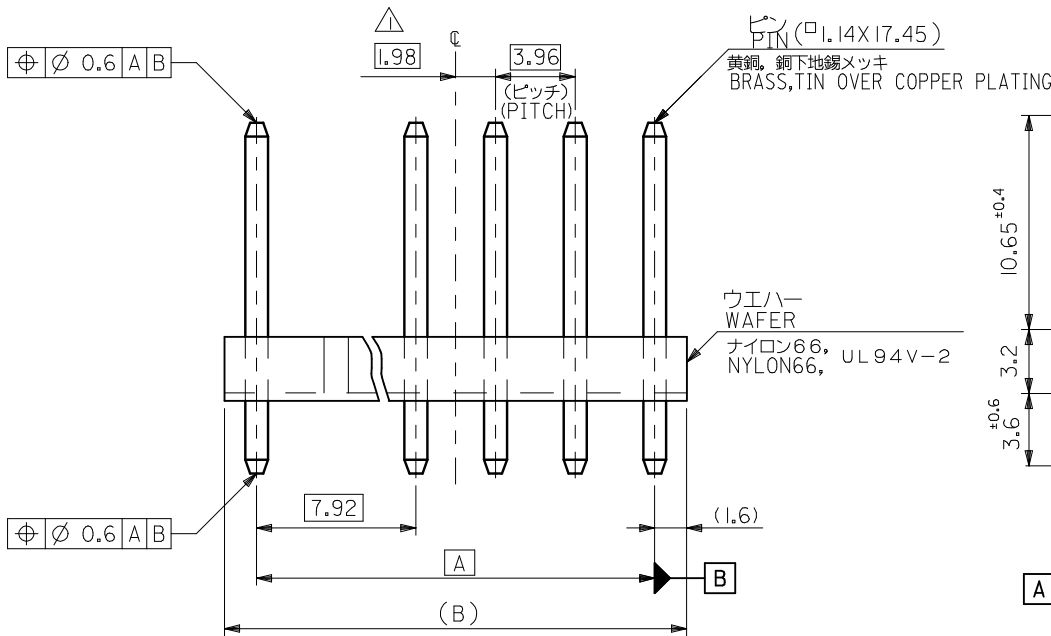
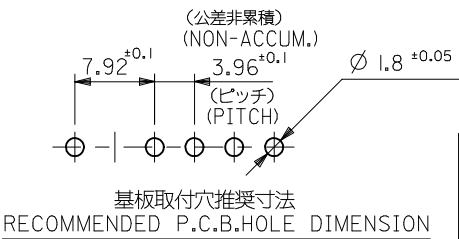




注記
NOTE

- △ 全極数が偶数の場合のみ適用。
TO BE APPLIED ONLY WHEN ALL CKTS. ARE EVEN.
- 2 ウエハーの反りは、長さ 25.4 に対して 0.2 最大。
CAMBER MUST BE 0.2 MAX.PER 25.4.

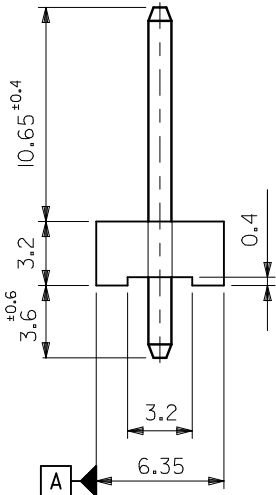

19.04	15.84	09-67-4042	5275-04A	4
B	A	EDP NO.	ENG. NO.	極数 CKT.

REVISED & REDRAWN EC NO: J2013-0400 DRAWN: KMATSUYAMA 2012/10/24 CHKD: KASAKAWA 2012/10/24 APPR: YOITO 2012/10/24 A	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.20	DRAWN BY KMATSUYAMA	DATE 2012/10/24	TITLE KK 3.96/7.92 WAFER ASSY				
		10 OVER 30 UNDER	± 0.25	CHECKED BY	DATE					
		30 OVER	± 0.3	APPROVED BY YOITO	DATE 2012/10/24	molex				
		ANGULAR ±3 °		MATERIAL NO.						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		DOCUMENT NO. SD-5275-001		SHEET NO. 1 OF 1		
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					