

NOTES:

1. MATERIALS AND FINISHES:

SMA STRAIGHT PLUG - P/N: 132113
BNC CRIMP PLUG - P/N: 112116
CABLE - RG 58/U COAXIAL CABLE

2. ELECTRICAL:


A. IMPEDANCE: 50 OHM, NOMINAL

3. PACKAGING:


A. QUANTITY: SINGLE PACK
B. BAG TO BE MARKED: AMPHENOL RF, 245101-04-XX.XX, AND DATE CODE

245101-04-XX.XX

DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	09-Jun-10	--	CL
	B	COD SHEET ADDED	27-Mar-14	2715	CL/BCG

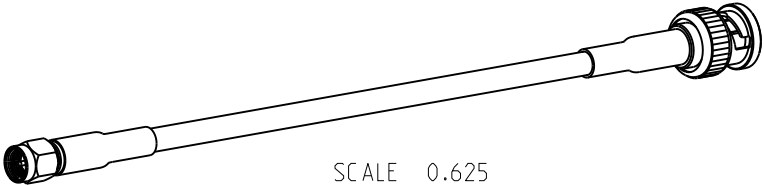

SCALE 0.625

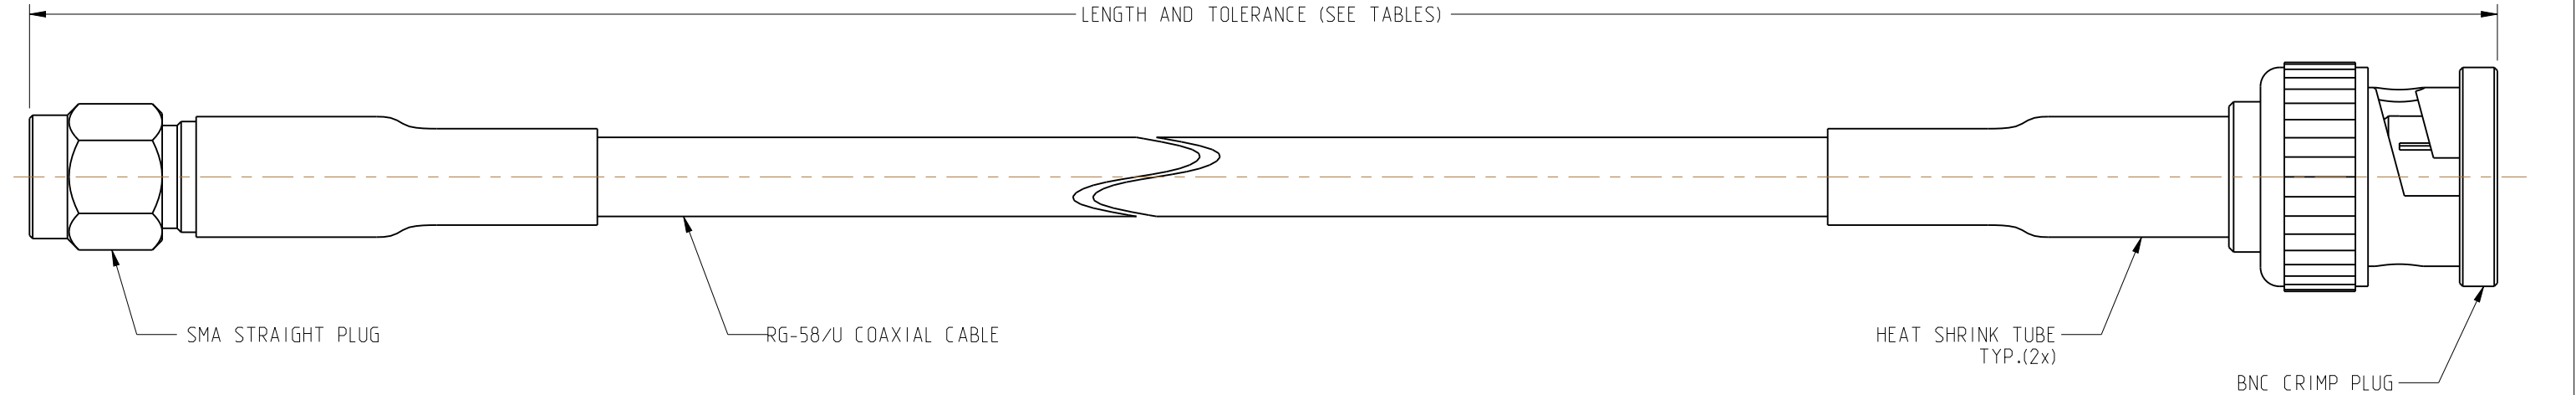

ORDERING INFORMATION		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH IN INCHES * [METERS]
245101-04-06.00	-	6.00 [0.152]
-	245101-04-M0.25	9.84 [0.250]
245101-04-12.00	-	12.00 [0.305]
245101-04-18.00	-	18.00 [0.457]
-	245101-04-M0.50	19.69 [0.500]
245101-04-24.00	-	24.00 [0.610]
-	245101-04-M0.75	29.53 [0.750]
245101-04-36.00	-	36.00 [0.914]
-	245101-04-M1.00	39.37 [1.000]
245101-04-48.00	-	48.00 [1.219]

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:

☒ FREQUENCY: DC TO 1.0 GHz

☐ VSWR : 1 MAX

☐ INS. LOSS dB MAX

☒ CONTINUITY

☒ HI-POT : 500 VRMS

☐ OTHER

*ADDITIONAL LENGTHS CAN BE PROVIDED.
CONTACT AMPHENOL RF MARKETING FOR QUOTE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS: 2 PLACE DECIMAL ±.015 (0,381 mm) 3 PLACE DECIMAL ±.005 (0,127 mm) ANGLES ± 1°	MATERIAL SEE NOTES	DRAWN CLEMENT	DATE 09-Jun-10	TITLE SMA STRAIGHT PLUG TO BNC CRIMP PLUG,USING RG-58/U COAXIAL CABLE VARIOUS LENGTHS	Amphenol Connex		
		ENGINEER CLEMENT	DATE 09-Jun-10				
	REFERENCE	APPROVED B.C. GLEISSNER	DATE 27-Mar-14		SCALE: 2.5:1		
		CAD FILE		DWG SIZE B	DRAWING NO. 245101-04-XX.XX	SHEET 2 OF 2	REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[245101-04-06.00](#) [245101-04-12.00](#) [245101-04-24.00](#) [245101-04-36.00](#) [245101-04-48.00](#) [245101-04-M0.25](#)
[245101-04-M0.50](#) [245101-04-M0.75](#) [245101-04-M1.00](#) [245101-04-18.00](#)