### **Solder Cup Plug: WTB**

#### 11-9159





The 9159 series of Board-to-Board interconnect system allows two PCB's to be mated end-to-end creating strips of LED lighting. Designed specifically for the unique Solid State Lighting (SSL) market requiring coplanar (horizontal-to-horizontal) PCB mating with a 5 Amp current rating in the smallest package available. The cabled plug was developed to bring power and signals onto the PCB's while keeping the same board level interface. This allows the designer to build a single PCB with a receptacle on one end and a plug on the other end to minimize cost and inventory. Regardless of where the PCB is used in the system, the cabled plug connector will then create the connection to the outside world. The optional latch can be inserted into the plug housing to assure positive attachment to the PCB in harsh environments without having to change the PCB connector.

#### **APPLICATIONS**

- Provided Wire-to-Board capabilities to standard 9159 2-Piece connector system
- Application Notes: refer to 201-01-123

#### **FEATURES AND BENEFITS**

- Mates with standard horizontal socket: no need to change any connectors
- 5 Amp current rating: exceeds general market needs
- Wires are soldered into connector with tie wrap strain relief: simplicity
- Optional latch: provides positive attachment to PCB connector
- Available in white: supports SSL market preferences

#### **ELECTRICAL**

• Current Rating: 5 Amps / Contact

Voltage Rating: 125 VAC


#### **ENVIRONMENTAL**


• Operating Temperature: -40°C to +125°C

#### **MECHANICAL**

- Insulator Material: Nylon: VL94VO
- Contact Material: BeCu / Phos Bronze
- Plating: Gold / Tin over Nickel
- Durability: 10 Cycles

#### **HOW TO ORDER**

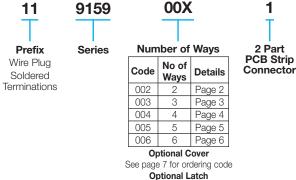

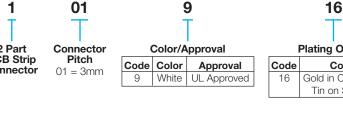





NOTES: Connectors are supplied with cable ties (see page 9).


Covers/Latches are sold separately (see pages 7-8 for ordering codes).


See page 8 for ordering code

Certification: UL File #E90723




### PLUG WIRED 2 WAY 2 PART 9159 LIGHTING CONNECTOR

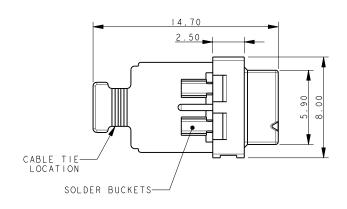


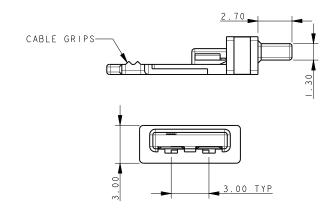


#### NOTES:

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-119.
- CABLE TIE SUPPLIED FOR WIRE RETENTION, ATTACHED TO EACH REEL. SPARES CAN BE ORDERED, REFER TO PAGE 9.
- 3. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 4. INSULATOR MATERIAL: NYLON 46. COLOR REFER TO PAGE 1.
- 5. CONTACT MATERIAL: COPPER ALLOY, SELECTIVE GOLD OVER NICKEL TIN PLATED ON TAILS.
- 6. PACKING IN TAPE AND REEL, QUANTITY PER REEL 700.
- 7. FOR ACCESSORY COVERS AND LATCHES REFER TO PAGES 7 AND 8.



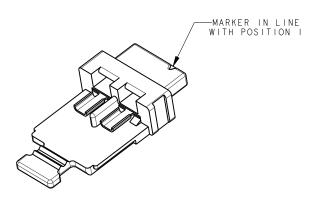












### PLUG WIRED 3 WAY 2 PART 9159 LIGHTING CONNECTOR

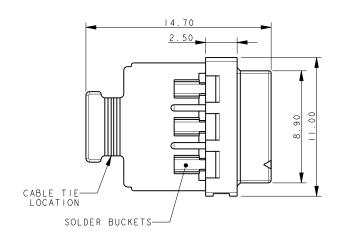


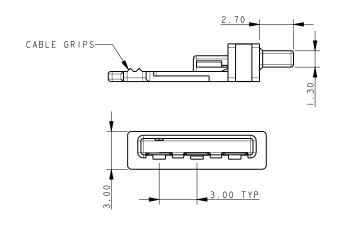



#### NOTES

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-119.
- 2. CABLE TIE SUPPLIED FOR WIRE RETENTION, ATTACHED TO EACH REEL. SPARES CAN BE ORDERED, REFER TO PAGE 9.
- 3. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 4. INSULATOR MATERIAL: NYLON 46. COLOR REFER TO PAGE 1.
- 5. CONTACT MATERIAL: COPPER ALLOY, SELECTIVE GOLD OVER NICKEL TIN PLATED ON TAILS.
- 6. PACKING IN TAPE AND REEL, QUANTITY PER REEL 700.
- 7. FOR ACCESSORY COVERS AND LATCHES REFER TO PAGES 7 AND 8.



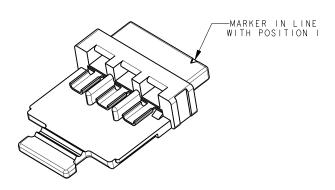












### PLUG WIRED 4 WAY 2 PART 9159 LIGHTING CONNECTOR

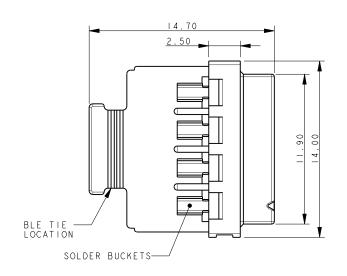


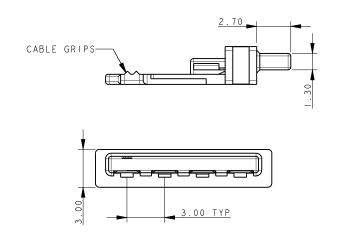



#### NOTES:

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-119.
- 2. CABLE TIE SUPPLIED FOR WIRE RETENTION, ATTACHED TO EACH REEL. SPARES CAN BE ORDERED, REFER TO PAGE 9.
- 3. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 4. INSULATOR MATERIAL: NYLON 46. COLOR REFER TO PAGE 1.
- 5. CONTACT MATERIAL: COPPER ALLOY, SELECTIVE GOLD OVER NICKEL TIN PLATED ON TAILS.
- 6. PACKING IN TAPE AND REEL, QUANTITY PER REEL 700.
- 7. FOR ACCESSORY COVERS AND LATCHES REFER TO PAGES 7 AND 8.



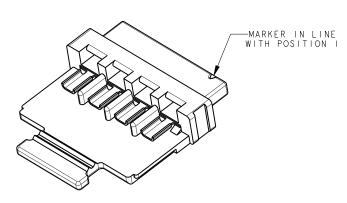












### PLUG WIRED 5 WAY 2 PART 9159 LIGHTING CONNECTOR

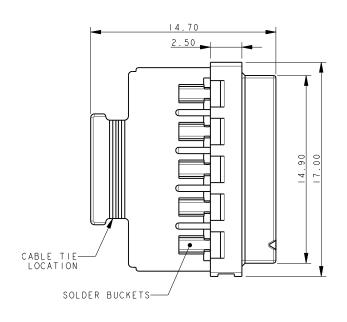


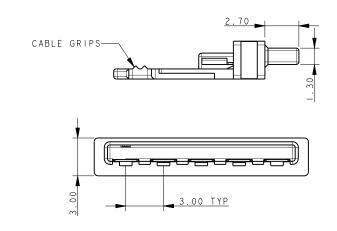


#### NOTES:

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-119.
- 2. CABLE TIE SUPPLIED FOR WIRE RETENTION, ATTACHED TO EACH REEL. SPARES CAN BE ORDERED, REFER TO PAGE 9.
- 3. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 4. INSULATOR MATERIAL: NYLON 46. COLOR REFER TO PAGE 1.
- 5. CONTACT MATERIAL: COPPER ALLOY, SELECTIVE GOLD OVER NICKEL TIN PLATED ON TAILS.
- 6. PACKING IN TAPE AND REEL, QUANTITY PER REEL 700.
- 7. FOR ACCESSORY COVERS AND LATCHES REFER TO PAGES 7 AND 8.



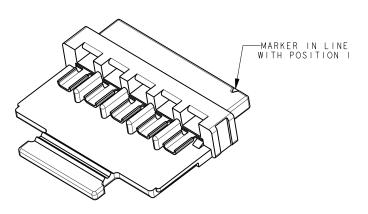












### PLUG WIRED 6 WAY 2 PART 9159 LIGHTING CONNECTOR

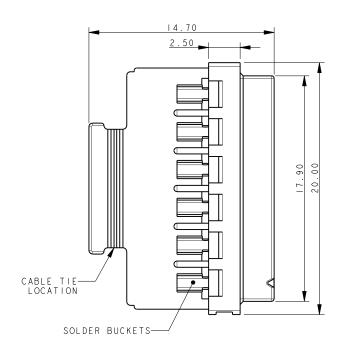


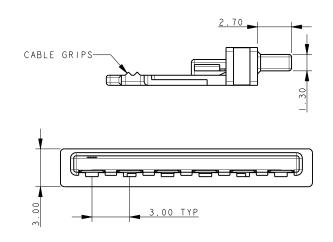



#### NOTES:

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-119.
- 2. CABLE TIE SUPPLIED FOR WIRE RETENTION, ATTACHED TO EACH REEL. SPARES CAN BE ORDERED. REFER TO PAGE 9.
- 3. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 4. INSULATOR MATERIAL: NYLON 46. COLOR REFER TO PAGE 1.
- 5. CONTACT MATERIAL: COPPER ALLOY, SELECTIVE GOLD OVER NICKEL TIN PLATED ON TAILS.
- 6. PACKING IN TAPE AND REEL, QUANTITY PER REEL 700.
- 7. FOR ACCESSORY COVERS AND LATCHES REFER TO PAGES 7 AND 8.

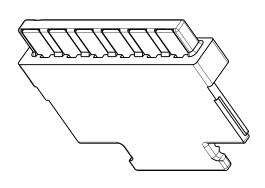

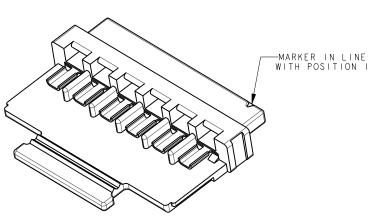








NOTE

09

60 NOTE



# PLUG WIRED COVERS ACCESSORY NOT SUPPLIED WITH CONNECTOR ASSEMBLY

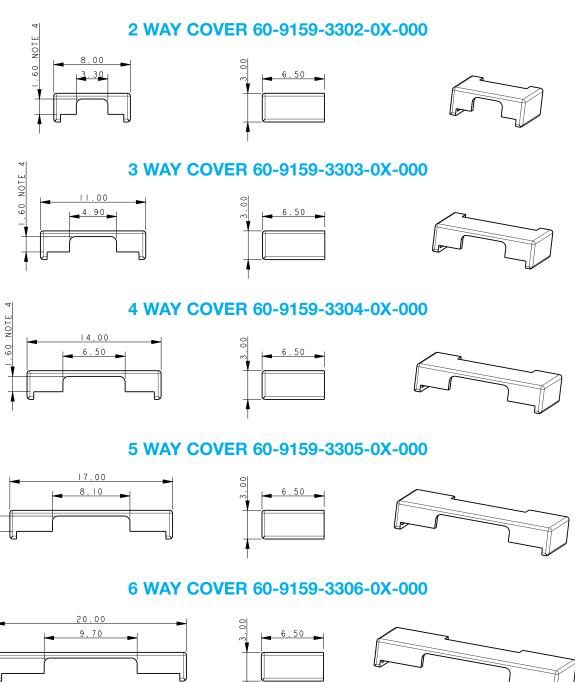

#### **NOTES**


- 1. COVER (SLIDE ON) AVAILABLE TO PROTECT CABLE ENTRY.
- 2. OPTION COMPONENT. ORDER SEPARATELY.
- 3. PACKED IN BAGS, 1400 PIECES PER BAG.
- 4. MAXIMUM OUTER WIRE SIZE, 1.6MM DIAMETER INSULATION.
- 5. MATERIAL: GLASS FILLED NYLON 46. COLOR REFER TO PAGE 1.
- ${\it 6. \,\, COLOR \,\, OPTIONS \,\, SEE \,\, PAGE \,\, 9.}$
- 7. ALL DIMENSIONS ARE REFERENCED DIMENSIONS.
- 8. TO BE ASSEMBLED BEFORE CABLE TIE.





## PLUG WIRED LATCHES ACCESSORY NOT SUPPLIED WITH CONNECTOR ASSEMBLY

### LATCH 60-9159-3402-0X-000 USED ON 2, 4 AND 6 WAY ASSEMBLIES











### LATCH 60-9159-3403-0X-000 USED ON 3 AND 5 WAY ASSEMBLIES









#### NOTES:

- 1. LATCH AVAILABLE TO RETAIN MATED PLUG.
- 2. OPTIONAL COMPONENT, ORDER SEPARATELY. SEE PAGE 9.
- 3. PACKAGED IN BAGS, 1400 PIECES PER BAG.
- 4. MATERIAL: GLASS FILLED NYLON 46. COLOR REFER TO PAGE 1.
- 5. ALL DIMENSIONS ARE REFERENCED DIMENSIONS.
- 6. TO BE ASSEMBLED BEFORE COVER.






#### PLUG WIRED ACCESSORY ORDERING CODES


Connector Assembly	Optional Components	
Part Number	Cover (see page 7)	Latch (see page 8)
11-9159-002-101-916	60-9159-3302-09-000	60-9159-3402-09-000
11-9159-003-101-916	60-9159-3303-09-000	60-9159-3403-09-000
11-9159-004-101-916	60-9159-3304-09-000	60-9159-3402-09-000
11-9159-005-101-916	60-9159-3305-09-000	60-9159-3403-09-000
11-9159-006-101-916	60-9159-3306-09-000	60-9159-3402-09-000

#### **CABLE TIE**

Supplied in bags with each reel of connector assemblys. Color White. For additional ties order code 90-2211-7092-00-000. Packed in bags, 700 pieces per bag.

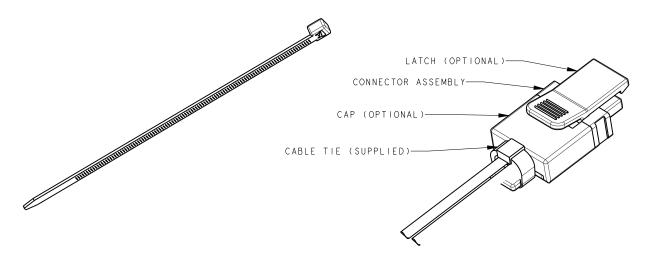

#### **PLUG WIRED 3 ASSEMBLY OPTIONS**

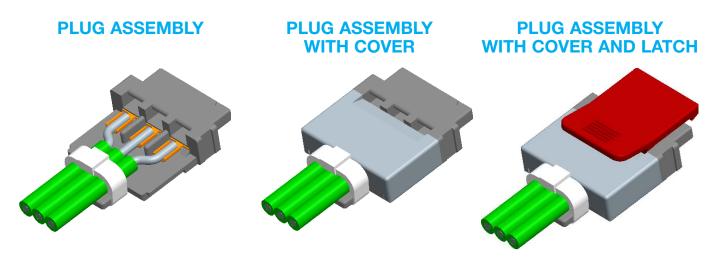

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### AVX:

<u>119159002101116</u> <u>119159003101116</u> <u>119159004101116</u> <u>119159005101116</u> <u>119159006101116</u> <u>609159330201000</u> <u>609159330301000</u> <u>609159330401000</u> <u>609159330501000</u> <u>609159330601000</u> <u>609159340201000</u> 609159340301000 119159002101916 609159330209000 609159340209000