
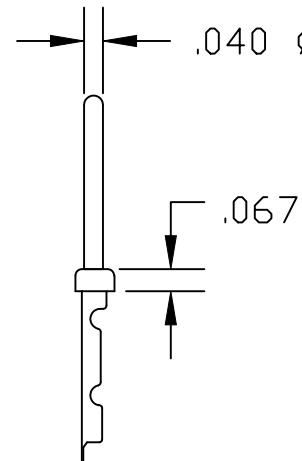


GOLD PLATING THICKNESS  
IS BETWEEN 1 $\mu$ " AND 1.5 $\mu$ "

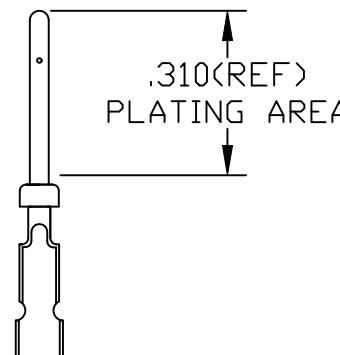

MATERIAL: BRASS  
RoHS COMPLIANT

WIRE SIZE: 24 - 28 AWG

NOTE #1: CONTACTS SUPPLIED ON 10,000 PC REEL  
NOTE #2: RECOMMENDED MAX. INSULATION DIAMETER  
FOR 24-28 IS .035".

WIRE SIZE:

PLATING	24-28
GOLD FLASH ON MATING AREA NICKEL ON WIRE CRIMP	170-001-170L001
.000010" GOLD OVER .000050" NICKEL ENTIRE CONTACT	170-001-170L002
.000030" GOLD OVER .000100" NICKEL ENTIRE CONTACT	170-001-170L003



THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF NorComp AND  
SHALL NOT BE REPRODUCED, COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

DRAWN:  
PAM JENKINS

DATE:  
7-25-05

CHECKED:


DATE:

NorComp


SCALE: SHEET 1 OF 2 REV 3

DWG NO.


170-001-170L00Y

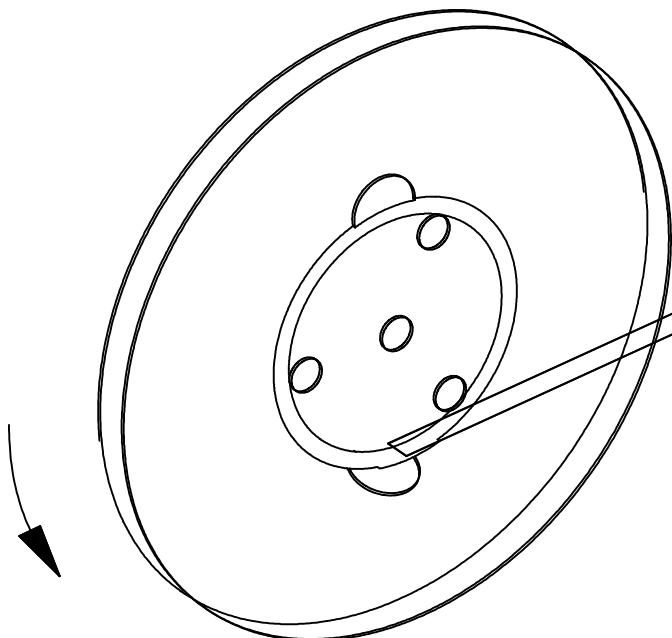


SEE DETAIL A

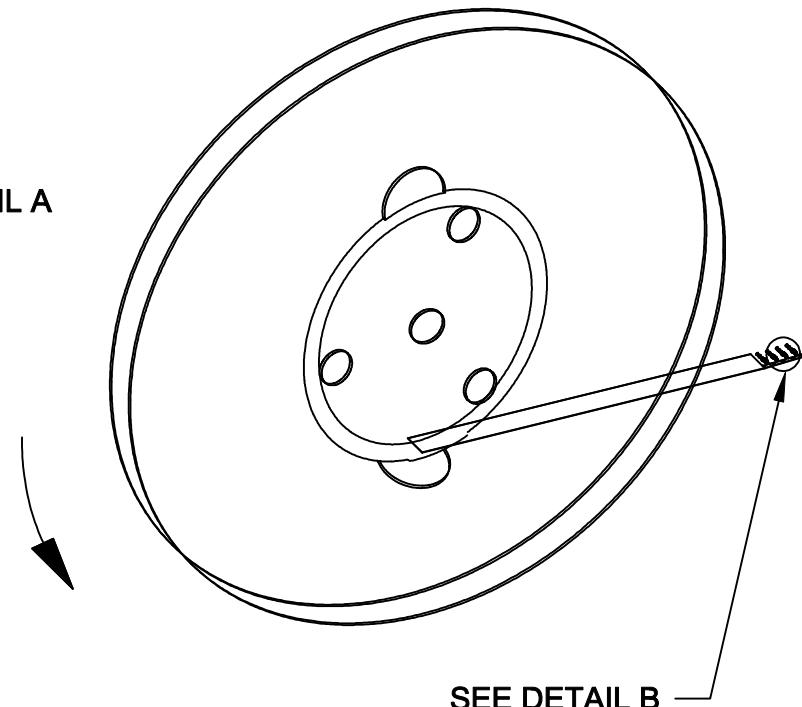

SEE DETAIL B



DETAIL A



DETAIL B



THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF NorComp AND  
SHALL NOT BE REPRODUCED, COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

DRAWN:  
PAM JENKINSDATE:  
7-25-05

CHECKED:

DATE:

# NorComp

SCALE: SHEET 2 OF 2 REV 3

DWG. NO.

170-001-170L00Y

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[170-001-170L002](#)