

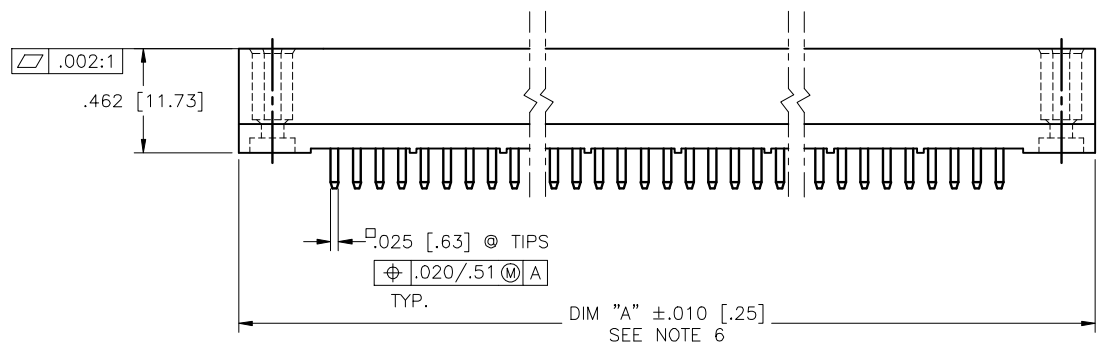


PRODUCT NUMBER
SEE TABLE

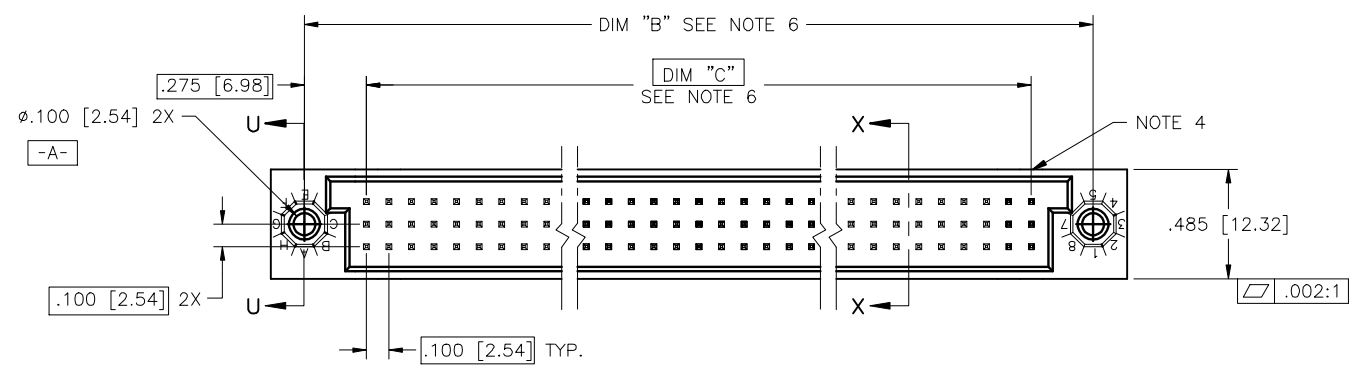


mat'l. code SEE NOTE 3				Surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM	title
H	V40286	PDP	1/20/94	angles	.XX $\pm$.01/XX $\pm$.03		3 ROW VERTICAL HEADER
J	V90017	HTB	1/7/99	linear	.XXX $\pm$.005/XXX $\pm$.013	scale 1:1	W/SOLDER TAIL PINS, 0 G.P.
K	V00272	JWS	2/1/00	0' $\pm$ 2'	.XXX $\pm$.0020/XXX $\pm$.0051		dwg no
L	V05-0753	DAI	10/03/05	dr	D.SHEAFFER	3/14/91	sheet 1 of 4 size
M	V05-1039	DAI	11/11/05	engr	S.CLARK	3/14/91	A3
N	M06-0283	MHT	7/27/06	chr	S.CLARK	3/14/91	
P	M09-0029	MHT	2/20/09	appd	S.CLARK	3/14/91	type
sheet	revision	P	P	P	P		Product Customer Drawing
index	sheet	1	2	3	4		

PRODUCT NUMBER
SEE TABLE

SECTION U-U

SECTION X-X

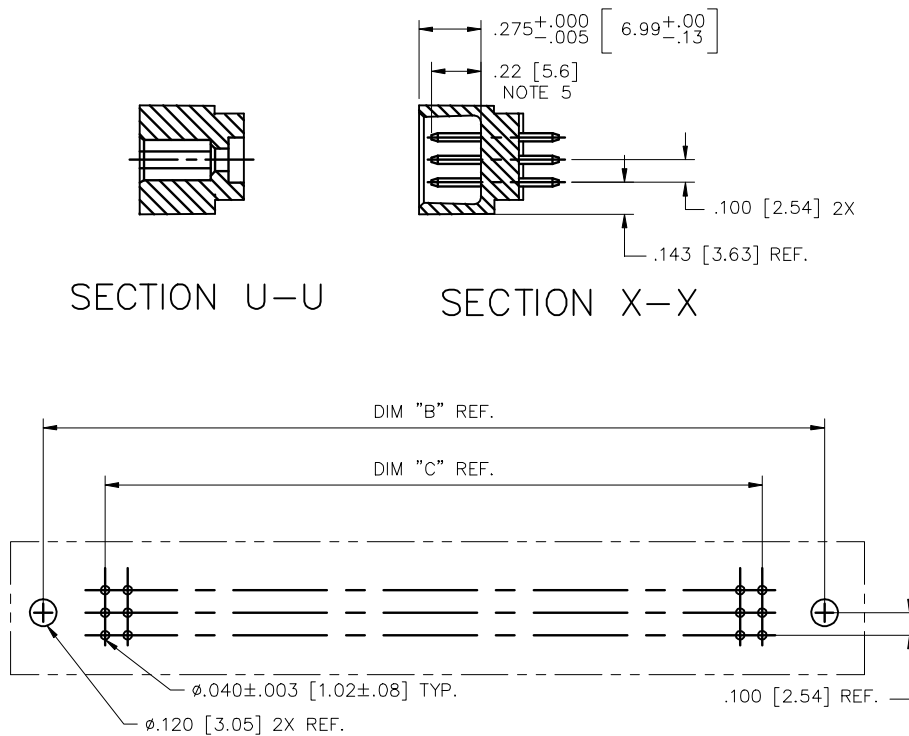

RECOMMENDED PCB LAYOUT
(ALL HOLES LOCATED ON .100/2.54 GRID
UNLESS OTHERWISE SPECIFIED)

mat'l. code	surface	tolerance	projection	product family
SEE NOTE 3	ISO 1902 ✓	ISO 406 ISO 1101		HPC
ltr	ecp no	dr	date	title
P				3 ROW VERTICAL HEADER
				W/SOLDER TAIL PINS, 0 G.P.
				dwg no
				sheet 2 of 4
				size
				A3
				type
				Product Customer Drawing
sheet	revision			
index	sheet			

PRODUCT NUMBER
SEE TABLE

50012-XX010 AND 50012-XX010LF ONLY

	1		5		10		15		20		25		30
C	B	B											
B	B	B											
A	B	B											

PIN
1

	31		35		40		45		50		55	
											B	B
											B	B
											B	B

CUSTOMER NOTE: END GUIDE PINS ARE SUGGESTED IN YOUR APPLICATION TO
PREVENT STUBBING OF THE .260 MATING LENGTH SIGNAL PINS.

NOTES FOR 50012-XX010 AND 50012-XX010LF ONLY:

- ALL POSITIONS ARE LOADED WITH "A", EXCEPT AS SHOWN.
- COLUMN 1, ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
- SIGNAL DATA FOR 50012-XX010 AND 50012-XX010LF:
SIZE 3 X 55
TOTAL NO. OF POSITIONS - 165
NO. OF POSITIONS LOADED - 165

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	153	.180 / 4.57	.177 / 4.50
B	12	.260 / 6.60	.177 / 4.50

mat'l. code SEE NOTE 3		surface ISO 1302	tolerance ISO 406 ISO 1101	projection ISO 1002	product family HPC
ltr	ecp no	dr	date	tolerances unless otherwise specified	title
P				angles linear .XX±.01/XX±.03 XXX±.005/XX±.013 XXX±.0020/XXX±.0051	3 ROW VERTICAL HEADER W/SOLDER TAIL PINS, 0 G.P.
				0'±2'	INCH/MM
				scale 1:1	dwg no
				dr D.SHEAFFER 3/14/91	sheet 3 of 4 size
				engr S.CLARK 3/14/91	50012 A3
				chr S.CLARK 3/14/91	type Product Customer Drawing
				appd S.CLARK 3/14/91	
sheet index	revision sheet				

PRODUCT NUMBER	NUMBER OF POSITIONS SEE NOTE 2	TAIL LENGTH ±.015/0.38	TERMINAL PLATING NOTE 9
50012-1YYYA	YYY	.177/4.50	30μ"/.76μ GOLD
50012-1YYYC	YYY	.533/13.54	30μ"/.76μ GOLD
50012-1YYYD	YYY	.733/18.62	30μ"/.76μ GOLD
50012-1YYYG	YYY	.250/6.35	30μ"/.76μ GOLD
50012-1YYYJ	YYY	.120/3.05	30μ"/.76μ GOLD
50012-3YYYA	YYY	.177/4.50	50μ"/1.27μ GOLD
50012-3YYYC	YYY	.533/13.54	50μ"/1.27μ GOLD
50012-3YYYD	YYY	.733/18.62	50μ"/1.27μ GOLD
50012-3YYYG	YYY	.250/6.35	50μ"/1.27μ GOLD
50012-3YYYJ	YYY	.120/3.05	50μ"/1.27μ GOLD
50012-5YYYA	YYY	.177/4.50	30μ"/.76μ GXT
50012-5YYYALF	YYY	.177/4.50	30μ"/.76μ GXT
50012-5YYYB	YYY	.190/4.82	30μ"/.76μ GXT
50012-5YYYBLF	YYY	.190/4.82	30μ"/.76μ GXT
50012-5YYYC	YYY	.533/13.54	30μ"/.76μ GXT
50012-5YYYCLF	YYY	.533/13.54	30μ"/.76μ GXT
50012-5YYYD	YYY	.733/18.62	30μ"/.76μ GXT
50012-5YYYDLF	YYY	.733/18.62	30μ"/.76μ GXT
50012-5YYYG	YYY	.250/6.35	30μ"/.76μ GXT
50012-5YYYGLF	YYY	.250/6.35	30μ"/.76μ GXT
50012-5YYYJ	YYY	.120/3.05	30μ"/.76μ GXT
50012-5YYYJLF	YYY	.120/3.05	30μ"/.76μ GXT
50012-XX010	165	SEE SHEET 3	30μ"/.76μ Au
50012-XX010LF	165	SEE SHEET 3	30μ"/.76μ GXT

NOTES:

- ① PRODUCT NUMBERING CODE:

50012 - X YYY Z LF

LEAD FREE (OPTIONAL)
TAIL LENGTH SEE TABLE
NO. OF POSITIONS SEE NOTE 2
PLATING SEE TABLE
BASE NUMBER

PRODUCT NUMBERING CODE FOR
SELECT LOAD/FMLB PART NUMBERS:

50012 - XXYYY LF

LEAD FREE (OPTIONAL)
SEQUENCE NUMBER
ALWAYS 'XX'
BASE NUMBER

- ② THIS PRODUCT IS CONFIGURED IN SIZES OF 6 thru 80
COLUMNS IN INCREMENTS OF ONE.
i.e.: 6,7,8,9,.....78,79,80.

- ③ HOUSING MATERIAL: GLASS AND MINERAL FILLED
HIGH TEMP. THERMOPLASTIC. FLAME RETARDANT PER
UL94V-0. COLOR: BLACK.
PIN MATERIAL: PHOS BRONZE

- ④ COMPANY NAME, PART NUMBER AND LOT CODE TO APPEAR ON
THIS SURFACE PER BUS-12-108.

- ⑤ REFERENCE 50804 FOR FIRST MATE LAST BREAK AVAILABLE
OPTIONS AND FOR SELECTIVELY LOADED HEADER WORKSHEET.

- ⑥ LENGTH FORMULAS:

DIM "A" .100/2.54 x NO. OF COLUMNS +.75/19.1

DIM "B" .100/2.54 x NO. OF COLUMNS +.450/11.43

DIM "C" .100/2.54 x NO. OF COLUMNS -.100/2.54

7. THIS PRODUCT (WITH "LF" SUFFIX) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008.

8. THIS HOUSING WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR
10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

- ⑨ PLATING OPTIONS:

MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURE'S OPTION

mat'l. code SEE NOTE 3				surface ISO 1302	tolerance ISO 406 ISO 1101	projection ISO 1001	product family HPC
ltr	ecn no	dr	date	tolerances unless otherwise specified		 INCH/MM scale 1:1	title 3 ROW VERTICAL HEADER W/SOLDER TAIL PINS, 0 G.P.
P				angles	linear		
					.XX±.01/XX±.03		dwg no 50012 sheet 4 of 4 size A3
					.XXX±.005/XXX±0.13		
				0'±2'	.XXX±.0020/XXX±0.051		
				dr	D.SHEAFFER 3/14/91		
				engr	S.CLARK 3/14/91		type Product Customer Drawing
				chr	S.CLARK 3/14/91		
				appd	S.CLARK 3/14/91		
sheet	revision						
index	sheet						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[50012-1063A](#)