

Metal Glaze Film Resistors




Features:

- Small in dimension and broad range in high resistance.
- Metal glaze resistor elements provide high stable performance against environmental conditions and overload.
- Excellent in absorption of electric shock (pulse, surge voltage).
- Approved to IEC 60065 safety requirements (VDE).

Performance Specifications:

Temperature coefficient	: $\leq \pm 200 \text{ PPM}/^\circ\text{C}$.
Short-time overload	: $\Delta R/R \leq \pm(1.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Dielectric withstanding voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Pulse overload	: $\Delta R/R \leq \pm(2.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Terminal strength	: No evidence of mechanical damage.
Resistance to soldering heat	: $\Delta R/R \leq \pm(1.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Minimum solderability	: 95% coverage.
Resistance to solvent	: No deterioration of protective coating and markings.
Temperature cycling	: $\Delta R/R \leq \pm(1.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Load life in humidity	: $\Delta R/R \leq \pm(5.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Load life	: $\Delta R/R \leq \pm(5.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Surge withstanding voltage	: $\Delta R/R \leq \pm(20.0\% + 0.05\Omega)$, with no evidence of mechanical damage.

Dimension:

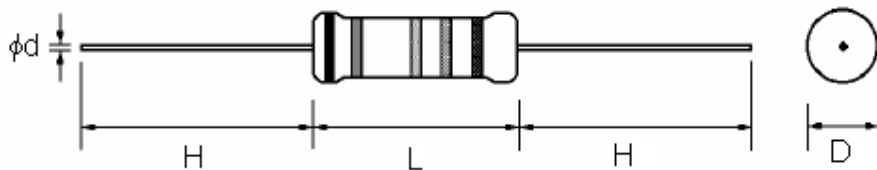

Dimensions : Millimetres

- 5 colour code band for $\pm 5\%$ tolerance and last band black colour for identification.
- MGRF1W and MGRF2W using non-flame point.

Specification Table

Type	Style	Power Rating at 70°C (W)	Dimension			
			D Maximum	L Maximum	d ± 0.05	H ± 3
MGRF1W	MGR-100	1	5.2	13.0	0.75	25
MGRF2W	MGR-200	2	6.0	17.0		28

Dimensions : Millimetres



Metal Glaze Film Resistors




Power Rating

Style	Maximum Working Voltage (V)	Maximum Overload Voltage (V)	Dielectric Withstanding Voltage (V)	Surge Withstanding Voltage (V)	Resistance Range
MGR-100	3500	4000	1000	100K Ω ~ 33M Ω : 10000	$\pm 5\%$: 1K Ω ~ 33M Ω
MGR-200					


Surge withstanding voltage: IEC 60065.

1. Discharge test : 3kV ~ <10kV, 0.01 μ F capacitor discharge pulse, 10 times (1pulse : 2.5 second "ON", 2.5 second "OFF").
2. Discharge test : ≥ 10 kV, 0.001 μ F (1nF) capacitor discharge pulse, 50 times (1pulse : 2.5 second "ON", 2.5 second "OFF").

Derating Curve

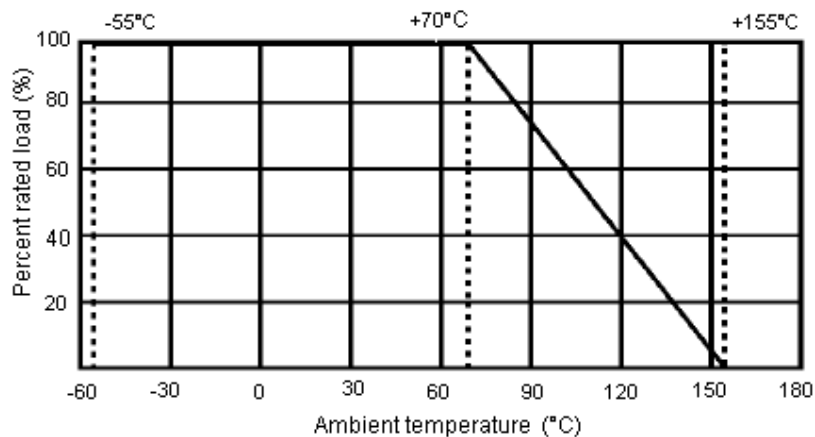

Surge Test - Test Circuit

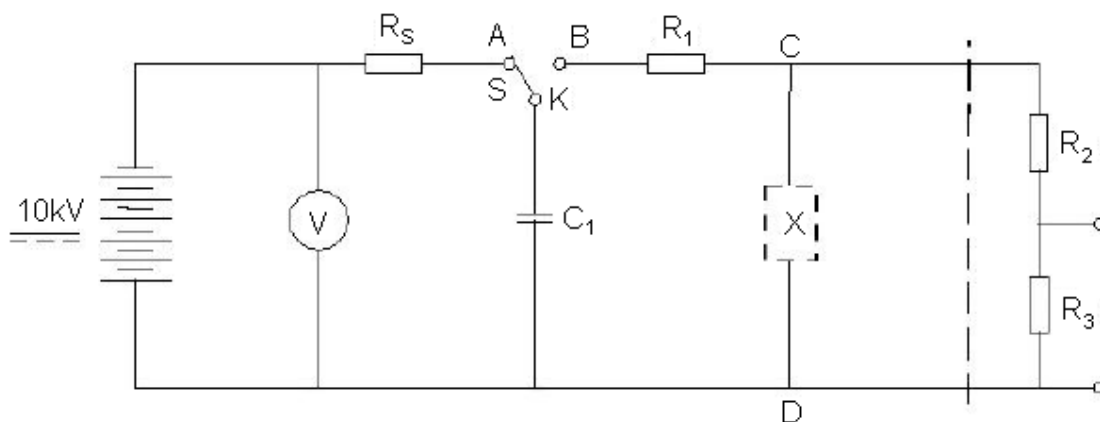

Note : $C_1 = 0.01\mu\text{F}$ <10000V $C_1 = 1\text{nF}$ (0.001 μF) $\geq 10000\text{V}$ $R_1 = 1\text{k}\Omega$ $R_2 = 100\text{M}\Omega$ $R_3 = 0.1\text{M}\Omega$ $R_s = 15\text{M}\Omega$.



Metal Glaze Film Resistors



Resistance Preferred Value Range

E6	E12	E24	E96	E6	E12	E24	E96	E6	E12	E24	E96
10	10	10	10.0				21.5				46.4
			10.2	22	22	22	22.1	47	47	47	47.5
			10.5				22.6				48.7
			10.7				23.2				49.9
		11	11.0				23.7			51	51.1
			11.3			24	24.3				52.3
			11.5				24.9				53.6
			11.8				25.5				54.9
	12	12	12.1				26.1		56	56	56.2
			12.4				27.7				57.6
			12.7		27	27	27.4				59.0
		13	13.0				28.0				60.4
			13.3				28.7			62	61.9
			13.7				29.4				63.4
			14.0			30	30.1				64.9
			14.3				30.9				66.5
			14.7				31.6	68	68	68	68.1
15	15	15	15.0				32.4				69.8
			15.4	33	33	33	33.2				71.5
			15.8				34.0				73.2
		16	16.2				34.8			75	75.0
			16.5				35.7				76.8
			16.9			36	36.5				78.7
			17.4				37.4				80.6
			17.8				38.3	82	82	82	82.5
	18	18	18.2		39	39	39.2				84.5
			18.7				40.2				86.6
			19.1				41.2				88.7
			19.6				42.2			91	90.9
		20	20.0			43	43.2				93.1
			20.5				44.2				95.3
			21.0				45.3				97.6

Above values in accordance with IEC Publication 63 (1963) and BS2488



Metal Glaze Film Resistors



Part Number

Resistance Value	Part Number
1M2	MGRF1WJ0125A10
1M5	MGRF1WJ0155A10
1M8	MGRF1WJ0185A10
2M2	MGRF1WJ0225A10
2M7	MGRF1WJ0275A10
3M3	MGRF1WJ0335A10
3M9	MGRF1WJ0395A10
4M7	MGRF1WJ0475A10
5M6	MGRF1WJ0565A10
6M8	MGRF1WJ0685A10
8M2	MGRF1WJ0825A10
10M	MGRF1WJ0106A10
15M	MGRF1WJ0156A10
22M	MGRF1WJ0226A10
33M	MGRF1WJ0336A10
1M2	MGRF2WJ0125AA9
1M5	MGRF2WJ0155AA9
1M8	MGRF2WJ0185AA9
2M2	MGRF2WJ0225AA9
2M7	MGRF2WJ0275AA9
3M3	MGRF2WJ0335AA9
3M9	MGRF2WJ0395AA9
4M7	MGRF2WJ0475AA9
5M6	MGRF2WJ0565AA9
6M8	MGRF2WJ0685AA9
8M2	MGRF2WJ0825AA9
10M	MGRF2WJ0106AA9
15M	MGRF2WJ0156AA9
22M	MGRF2WJ0226AA9
33M	MGRF2WJ0336AA9




Multiplier Code (for 5% Marking)

Code	A	B	C	D	E	F	G	H	X	Y	Z
Multiplier	10^0	10^1	10^2	10^3	10^4	10^5	10^6	10^7	10^{-1}	10^{-2}	10^{-3}

Standard E-96 Series Resistance Value Code (for 5% Marking)

Value	Code	Value	Code	Value	Code	Value	Code	Value	Code
100	01	162	21	261	41	422	61	681	81
102	02	165	22	267	42	432	62	698	82
105	03	169	23	274	43	442	63	715	83
107	04	174	24	280	44	453	64	732	84
110	05	178	25	287	45	464	65	750	85
113	06	182	26	294	46	475	66	768	86
115	07	187	27	301	47	487	67	787	87
118	08	191	28	309	48	499	68	806	88
121	09	196	29	316	49	511	69	825	89
124	10	200	30	324	50	523	70	845	90
127	11	205	31	332	51	536	71	866	91
130	12	210	32	340	52	549	72	887	92
133	13	215	33	348	53	562	73	909	93
137	14	221	34	357	54	576	74	931	94
140	15	226	35	365	55	590	75	953	95
143	16	232	36	374	56	604	76	976	96
147	17	237	37	383	57	619	77	-	-
150	18	243	38	392	58	634	78	-	-
154	19	249	39	402	59	649	79	-	-
158	20	255	40	412	60	665	80	-	-

Part Number Explanation

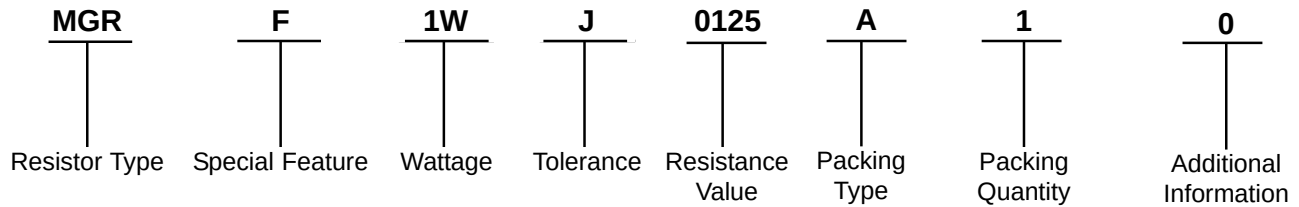

Resistor Type	: MGR = Metal glaze film fixed resistors.
Special Feature	: F = UL non-flame for 1W and 2W.
Wattage	: 1W = 1W (UL non-flame paint) and 2W = 2W (UL non-flame paint).
Tolerance	: J = $\pm 5\%$.
Resistance Value	: E-24 series: the 1 st digit is "0", the 2 nd and 3 rd digits are for the significant figures of the resistance and the 4 th indicate the number of zeros. "J" ~ 0.1, "K" ~ 0.01. Ex. 4.7 ~ 47J and 4.7K Ω ~ 472. E-96 series: The 1st to 3 rd digits are significant figures of resistance and the 4 th one denotes number of zeros. Ex. 1.33 K Ω = 1331.
Packing Type	: A = Tape/Box.
Packing Quantity	: 1 = 1000 pieces and 0 = for Bulk/Box packing.
Additional Information	: 0 = PT-52mm and 9 = PT-64mm.

Metal Glaze Film Resistors



Notes:

International Sales Offices:

 AUSTRALIA - Farnell Tel No: ++61 1300 361 005 Fax No: ++61 1300 361 225	 FINLAND - Farnell Tel No: ++358 9 560 7780 Fax No: ++358 9 345 5411	 ITALY - Farnell Tel No: ++39 02 93 995 200 Fax No: ++39 02 93 995 300	 SPAIN - Farnell Tel No: 901 20 20 80 Fax No: 901 20 20 90
 AUSTRIA - Farnell Tel No: ++43 662 2180 680 Fax No: ++43 662 2180 670	 FRANCE - Farnell Tel No: ++33 474 68 99 99 Fax No: ++33 474 68 99 90	 MALAYSIA - Farnell-Newark Tel No: ++60 3 7873 8000 Fax No: ++60 3 7873 7000	 SWEDEN - Farnell Tel No: ++46 8 730 50 00 Fax No: ++46 8 83 52 62
 BELGIUM - Farnell Tel No: ++32 3 475 2810 Fax No: ++32 3 227 3648	 GERMANY - Farnell Tel No: ++49 89 61 39 39 39 Fax No: ++49 89 613 59 01	 NETHERLANDS - Farnell Tel No: ++31 30 241 7373 Fax No: ++31 30 241 7333	 SWITZERLAND - Farnell Tel No: ++44 204 64 64 Fax No: ++44 204 64 54
 BRAZIL - Farnell-Newark Tel No: ++55 11 4066 9400 Fax No: ++55 11 4066 9410	 HONG KONG - Farnell-Newark Tel No: ++852 2268 9888 Fax No: ++852 2268 9899	 NEW ZEALAND - Farnell Tel No: 0800 90 80 80 Fax No: 0800 90 80 81	 UK - Farnell Tel No: ++44 8701 200 200 Fax No: ++44 8701 200 201
 CHINA - Farnell-Newark Tel No: ++86 10 6238 5152 Fax No: ++86 10 6238 5022	 HUNGARY - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 NORWAY - Farnell Tel No: 800 146 70 Fax No: 800 146 76	 UK - CPC ++44 8701 202 530 ++44 8701 202 531
 CZECH REPUBLIC - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 INDIA - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 PORTUGAL - Farnell Tel No: ++34 93 475 8804 Fax No: ++34 93 474 5288	 USA - Newark Tel No: 800 463 9275
 DENMARK - Farnell Tel No: ++45 44 53 66 44 Fax No: ++45 44 53 66 06	 IRELAND - Farnell Tel No: ++353 1 830 9277 Fax No: ++353 1 830 9016	 RUSSIA - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 EXPORT - Farnell Tel No: ++44 8701 200 208 Fax No: ++44 8701 200 209 For enquiries from all other markets
 ESTONIA - Farnell Tel No: ++358 9 560 7780 Fax No: ++358 9 345 5411	 ISRAEL - Farnell Tel No: ++180 937 0015 Fax No: ++180 937 0014	 SINGAPORE - Farnell-Newark Tel No: ++65 6788 0200 Fax No: ++65 6788 0300	http://www.farnell.com http://www.newark.com http://www.cpc.co.uk

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2007.

