

Screw Clamp 15 mm DIN-Rail Terminals

Feed Through

Fuse

Disconnect

Ground

Thermocouple

Weidmüller's 15 mm DIN-rail terminals are similar in design and function to the SAK-Series, but their smaller dimensions make them particularly useful in miniaturized equipment.

Like the SAK, the miniature blocks are available in both Polyamide 6.6 and Melamine.

AKZ 1.5




AKZ 2.5




AKZ 4

for test adapter



AKZ 4/10

for test adapter

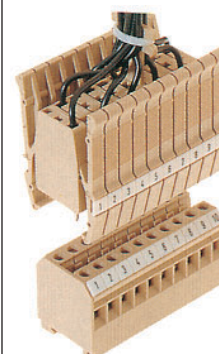

Available Options		Version	TS 15	TS 15	TS 15	TS 15
		KrG			0294320000	
		PA	0340460000	0697160000 (with spigot)	0294360000	0359560000 without marking
Blue PA			0340480000	0697180000 (with spigot)	0294380000	
		PA	0358060000 (10 pole w/o mark.)	0175960000 (without spigot)		
		PA	0358160000 (10 pole w/mark.)	0385860000 AKZ 2.5 with AP	1538260000 for test adapter	1489360000 w/mark./for test ad.
Test adapter ATA1						1633240000 10 pole
Dimensions						
Width / Length / Height mm (in.)		with TS 15	5/25/25 (.197/.98/.98)	5/25.5/27 (.197/1/1.06)	6/27/30 (.24/1/1.18)	60/27/30 (2.36/1/1.18)
Insulation stripping length		mm (in.)	7 (.28)	7 (.28)	9 (.35)	9 (.35)
Technical Data						
Rated voltage / rated current / wire size		UL	150 V / 15 A / #22...14 AWG	300 V / 10 A / #26...12 AWG	300 V / 27 A / #22...12 AWG	300 V / 27 A / #22...12 AWG
		CSA	300 V / 10 A / #24...16 AWG	300 V / 10 A / #26...10 AWG	300 V / 10 A / #24...12 AWG	300 V / 10 A / #24...12 AWG
		VDE	250 VAC / 18 A / 1.5 mm²	250 VAC / 26 A / 2.5 mm²	380 VAC / 34 A / 4 mm²	380 VAC / 34 A / 4 mm²
Torque		Nm (lb. in.)	0.4 (4.5)	0.4 (4.5)	0.5 (8.0)	0.5 (8.0)
Clamping screw		M	2.5	2.5	3	3
End Plate (thickness mm)		Type	Part No.	Type	Part No.	Type
		KrG			AP (1.5) 0294420000	
Blue KrG						
PA		AP (1.5)	0340560000	AP (2.5)	0697360000	AP (1.5) 0294460000
Blue PA				AP (2.5)	0697380000	AP (1.5) 0294480000
Partition (thickness mm)						
		Blue KrG				
		Blue KrS				
		PA		TW (1.5) 0318560000	TW (0.5) 0348260000	TW (0.5) 0348260000
		Blue PA		TW (1.5) 0318580000		
Small Partition						
		PA			TSch 4 0363360000	TSch 4 0363360000
Jumpers						
Note: Final number in model indicates no. of poles (e.g. Q2 = 2 poles). For additional information, see Accessories section.		Q2	0368200000	Q2	0368200000	Q2 0336400000
		Q3	0368300000	Q3	0368300000	Q3 0336500000
		Q4	0368400000	Q4	0368400000	Q4 0336600000
		Q5	0660300000	Q5	0660300000	
		Q10	0368500000	Q10	0368500000	Q10 0368600000
					VL 2 0446700000	VL 2 0446700000
					VH 10 0446600000	VH 10 0446600000
					BS M 2.5x14 0266800000	BS M 2.5x14 0266800000
Cover / Cover Profile for Shock Protection*						
					Dekafix can be snapped over cross-connection slot	
					AD 4 0303400000	AD 4 0303400000
					BSK M 2.5x18 0303300000	BSK M 2.5x18 0303300000
					ADP 4** 1378160000	ADP 4** 1378160000
Test Plugs / Sockets						
Plug / test socket usable without QL		StB 8.5	0215700000	StB 8.5	0215700000	StB 8.5 0215700000
PS						
StB						
For #18 AWG wire		PS 2.3	0180400000	PS 2.3	0180400000	PS 2.3 0180400000
Marking Tags		Print				
Consecutive horizontal		DEK 5/5	0473460001	DEK 5/5	0473460001	DEK 5/5 0473460001
Consecutive vertical		DEK 5/5	0473560001	DEK 5/5	0473560001	DEK 5/5 0473560001
See Accessories section for mounting rails, end brackets, test taps, additional marking material and accessories.						