

215 Series, 5×20 mm, Time-Lag Fuse



Agency Approvals

Agency	Agency File Number	Ampere Range
	Cartridge: NBK080205-E10480A NBK250702-E10480E NBK100408-JP1021A	1A – 5A 6.3A – 15A 16A – 20A
	Leaded: NBK080205-E10480B NBK250702-E10480F NBK100408-JP1021B	1A – 5A 6.3A – 15A 16A – 20A
	2005010207145714	1A – 6.3A
	CQC07012021808	8A – 10A
	SU05001-2011B SU05001-10001 SU05001-10002 SU05001-2012B	1A – 2.5A 3.15A – 6.3A 8A 4A – 10A
	E10480	0.125A - 20A
	29862	0.5A – 12A
	1517218	0.125A-12A 15A*, 16A*, 20A*
	40013521	0.2A – 8A *10A
	40016610	*12A
	KM41462	0.200A – 10A
	J50258578	16A/20A
	N/A	0.125A – 20A

* Approved for cartridge versions only

Description

5×20mm Time-Lag surge withstand ceramic body cartridge fuse designed to IEC specification

Features

- Designed to International (IEC) Standards for use globally
- High breaking capacity
- Meets the IEC 60127-2, Sheet 5 specification for Time-Lag fuses
- RoHS compliant and lead-free

Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

Additional Information



Datasheet



Resources



Samples

Electrical Characteristics for Series

% of Ampere Rating	Ampere Rating	Opening Time
150%	0.125A – 0.800A	60 minutes, Minimum
	1A – 3.15A	60 minutes, Minimum
	4A – 6.3A	60 minutes, Minimum
	8A – 20A	30 minutes, Minimum
210%	0.125A – 0.800A	30 minutes, Maximum
	1A – 3.15A	30 minutes, Maximum
	4A – 6.3A	30 minutes, Maximum
	8A – 20A	30 minutes, Maximum
275%	0.125A – 0.800A	.25 sec. Min.; 80 secs. Max.
	1A – 3.15A	.75 sec. Min.; 80 secs. Max.
	4A – 6.3A	.75 sec. Min.; 80 secs. Max.
	8A – 20A	.75 sec. Min.; 80 secs. Max.
400%	0.125A – 0.800A	.05 sec., Min.; 5 secs. Max.
	1A – 3.15A	.095 sec., Min.; 5 secs. Max.
	4A – 6.3A	.150 sec., Min.; 5 secs. Max.
	8A – 20A	.150 sec., Min.; 5 secs. Max.
1000%	0.125A – 0.800A	.005 sec., Min.; .150 sec. Max.
	1A – 3.15A	.010 sec., Min.; .150 sec. Max.
	4A – 6.3A	.010 sec., Min.; .150 sec. Max.
	8A – 20A	.010 sec., Min.; .150 sec. Max.

Axial Lead & Cartridge Fuses

5x20 mm > Time-Lag > 215 Series

Electrical Characteristic Specifications by Item

Amp Code	Amp Rating	Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec)	Maximum Voltage Drop at Rated Current (mV)	Maximum Power Dissipation at 1.5I _n (W)	Agency Approvals											
								UL	CSA	IEC	UL	UL	UL	UL	UL	UL	UL	UL	UL
.125	0.125	250	1500 A @ 250 VAC	11.4455	0.0330	2600	1.6					x		x					x
.160	0.16	250		7.1000	0.0465	2400	1.6					x		x					x
.200	0.2	250		1.8400	0.340	2100	1.6	x				x		x	x				x
.250	0.25	250		1.2400	0.545	1500	1.6	x				x		x	x				x
.315	0.315	250		0.8800	0.975	1100	1.6	x				x		x	x				x
.400	0.4	250		0.5825	1.325	1000	1.6	x				x		x	x				x
.500	0.5	250		1.1675	0.420	850	1.6	x				x	x	x	x				x
.630	0.63	250		0.7200	0.635	650	1.6	x				x	x	x	x				x
.800	0.8	250		0.4675	0.975	500	1.6	x				x	x	x	x				x
001.	1	250		0.1515	1.520	350	2.5	x	x	x	x	x	x	x	x				x
1.25	1.25	250		0.1074	3.200	300	2.5	x	x	x	x	x	x	x	x				x
01.6	1.6	250		0.0707	6.830	200	2.5	x	x	x	x	x	x	x	x				x
002.	2	250		0.0566	11.680	190	2.5	x	x	x	x	x	x	x	x				x
02.5	2.5	250		0.0386	22.290	180	2.5	x	x	x	x	x	x	x	x				x
3.15	3.15	250		0.0283	43.255	140	4	x	x	x	x	x	x	x	x				x
004.	4	250		0.0185	46.960	100	4	x	x	x	x	x	x	x	x				x
005.	5	250		0.0153	66.095	100	4	x	x	x	x	x	x	x	x				x
06.3	6.3	250		0.0108	128.750	100	4	x	x	x	x	x	x	x	x				x
008.	8	250		0.0092	209.880	100	4	x	x		x	x	x	x	x		x		x
010.	10	250		0.0066	333.565	100	4	x	x		x	x	x	x	x*		x		x
012.	12	250		0.0061	515.500	100	4		x			x	x	x		x*			x
015.	15	250	500 A @ 250Vac	0.0033	1237.0	N/A**	N/A**		x			x		x*					x
016.	16	250		0.0031	1408.0	N/A**	N/A**		x			x		x*				x	x
020.	20	250	400 A @ 250Vac	0.0023	2600.0	N/A**	N/A**		x			x		x*				x	x


X* Approval for cartridge versions only

N/A** - Please contact Littelfuse for details on these parameters

1A to 2A have an IR : 100A@500VAC, 4A to 6-3A have the IR : 100A@305 VAC and 1000A@72VDC

I²t test at 10x rated current.

Temperature Re-rating Curve

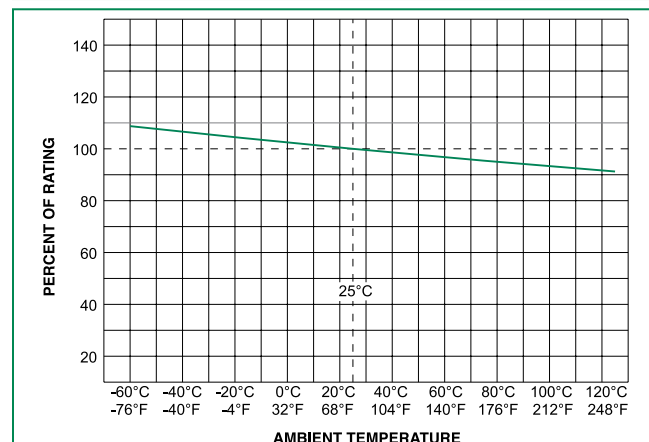


Product Characteristics


Materials	Body: Ceramic Cap: Nickel-plated Brass Leads: Tin-plated Copper
Terminal Strength	MIL-STD-202, Method 211, Test Condition A
Solderability	MIL-STD-202 Method 208
Product Marking	Cap 1: Brand logo, current and voltage ratings Cap 2: Agency approval markings
Operating Temperature	-55°C to +125°C
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (5 cycles, -65°C to +125°C)
Vibration	MIL-STD-202, Method 201
Humidity	MIL-STD-202, Method 103, Test Condition A (High RH (95%) and elevated temp (40°C) for 240 hours)
Salt Spray	MIL-STD-202, Method 101, Test Condition B

Average Time Current Curves


T-C Curves for 125mA to 800mA only

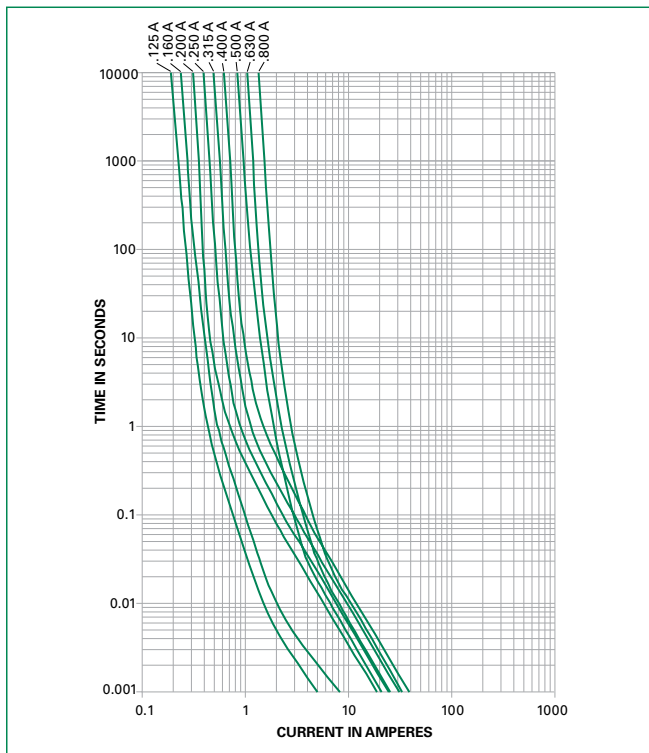

T-C Curves for 1A to 20A only

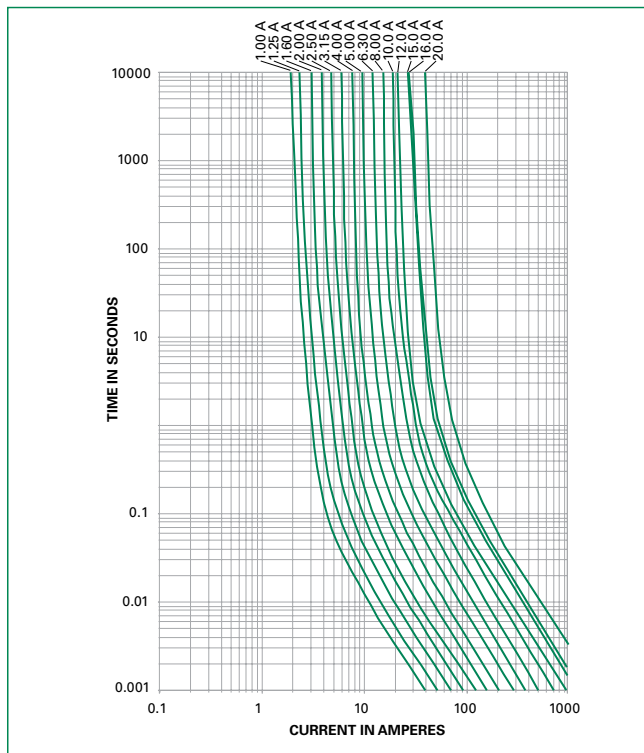

Soldering Parameters - Wave Soldering

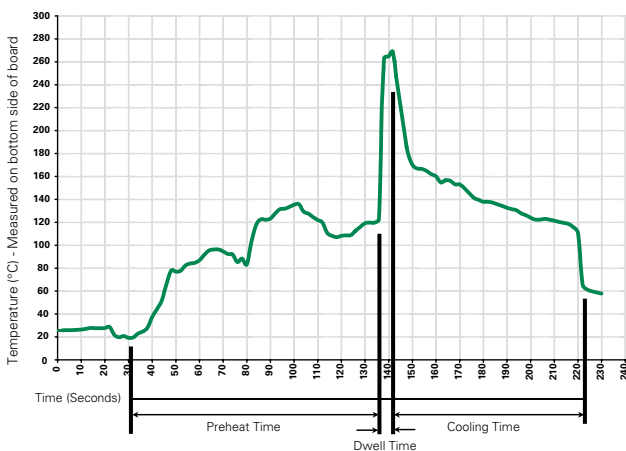

Recommended Process Parameters:


Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature) (Typical Industry Recommendation)	
Temperature Minimum:	100° C
Temperature Maximum:	150° C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260° C Maximum
Solder Dwell Time:	2-5 seconds

Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5° C
Heating Time: 5 seconds max.

Note: These devices are not recommended for IR or Convection Reflow process.

Different values of A and B available, please contact the Littelfuse sales representative in your region:

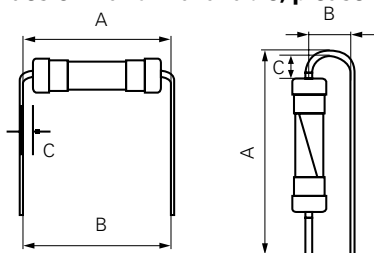

For the pigtailed fuse, please follow the recommendations below for axial lead forming and mounting into PCB:

Lead forming:

The distance C between cap flat surface and axial lead shall be greater than 1.0 mm.

PCB mounting:



The distance between PCB and fuse cap is recommended to be a minimum of 1.5 mm.

Axial Lead & Cartridge Fuses

5×20 mm > Time-Lag > 215 Series

Dimensions

All dimensions in mm




Notes:

* Ratings above 6.3 A have 0.8 ± 0.05 diameter lead;

* Ratings above 12 A have 1.2 ± 0.05 diameter lead.

Part Numbering System

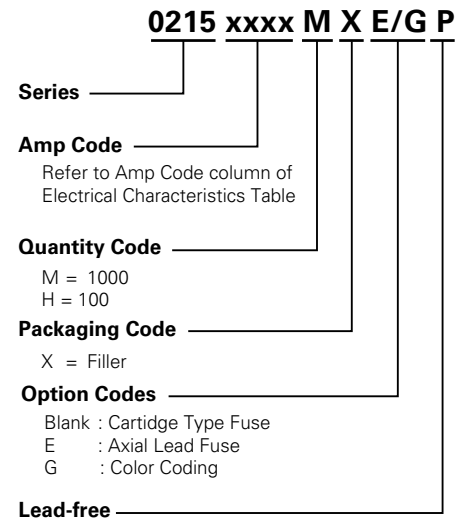

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
215 Series				
Bulk	N/A	1000	MX	N/A
Bulk	N/A	1000	MXE	N/A
Reel and Tape	N/A	1000	MRET1	T1=53mm (2.087")
Bulk and Color Coding	N/A	1000	MXG	N/A
Bulk	N/A	1000	MXB	N/A
Bulk	N/A	100	HX	N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[021506.3H-](#) [02151.25M-](#) [0215010.MXE-](#) [021501.6M-](#) [0215.400H-](#) [0215004.H-](#) [0215.200MXE-](#) [0215.400MXE-](#)
[0215012.M-](#) [0215001.MXE-](#) [02151.25H-](#) [021502.5MXE-](#) [0215.315MXE-](#) [021501.6MXE-](#) [02153.15M-](#) [0215.200M-](#)
[0215.315M-](#) [02151.25MXE-](#) [021506.3MXE-](#) [0215005.H-](#) [0215008.MXE-](#) [0215.500M-](#) [021502.5H-](#) [021501.6H-](#)
[0215001.M-](#) [0215002.M-](#) [0215005.MXE-](#) [0215.250M-](#) [0215005.M-](#) [0215.630H-](#) [02153.15H-](#) [0215.800M-](#)
[02153.15MXE-](#) [0215010.H-](#) [0215.800MXE-](#) [0215008.M-](#) [0215.500MXE-](#) [0215.250H-](#) [0215.630MXE-](#) [0215001.H-](#)
[0215.400M-](#) [0215008.H-](#) [0215002.MXE-](#) [0215.630M-](#) [0215002.H-](#) [0215004.M-](#) [0215.250MXE-](#) [0618002.MXP](#)
[061801.6MXP](#) [0618005.MXP](#) [0617010.MXP](#) [0618001.MXP](#) [061802.5MXP](#) [0617002.MXP](#) [061806.3MXP](#)
[021501.6VXP](#) [02153.15MXBP](#) [02153.15MXGP](#) [0215.800VXP](#) [0215.630VXP](#) [0215010.MXF8P](#) [0215010.MRET2P](#)
[0215010.MX909P](#) [0215.315VXP](#) [0215010.MXP-RES](#) [0215010.MXG940P](#) [0215015.MXF51P](#) [02153.15MXF56P](#)
[0215010.MXF46P](#) [0215010.MXF56P](#) [0215.400VXP](#) [021506.3MXF56P](#) [0215010.MXK10P](#) [0215010.MXF34P](#)
[0215010.MXF60P](#) [0215004.MXK24P](#) [0215010.MXEP-RES](#) [021506.3MXK23P](#) [0215010.MXK15P](#) [0215010.MXB940P](#)
[0215.200VXP](#) [02153.15MXF59P](#) [0215010.MXF20P](#)