



Features

- Semi-shielded construction
- Inductance range: 1 to 220 μ H
- Rated current up to 3 A
- RoHS compliant* and halogen free**

Applications


- DC/DC converters
- Notebook computers
- Digital video cameras
- HDDs
- Cellphones
- Televisions, LCD displays

SRN4026 Series - Semi-shielded Power Inductors


Electrical Specifications @ 25 °C

Bourns Part No.	Inductance @ 100 KHz / 1 V		DCR (Ω) Max.	I _{rms} (A)	I _{sat} (A)
	L (μ H)	Tol. %			
SRN4026-1R0Y	1.0	30	0.016	3	3
SRN4026-1R2Y	1.2	30	0.024	2.75	2.75
SRN4026-2R2Y	2.2	30	0.029	2.1	2.1
SRN4026-3R3M	3.3	20	0.036	1.6	1.6
SRN4026-4R7M	4.7	20	0.048	1.4	1.4
SRN4026-6R8M	6.8	20	0.084	1.2	1.2
SRN4026-100M	10	20	0.102	0.97	0.97
SRN4026-150M	15	20	0.144	0.77	0.77
SRN4026-220M	22	20	0.234	0.67	0.67
SRN4026-330M	33	20	0.366	0.5	0.5
SRN4026-470M	47	20	0.594	0.4	0.4
SRN4026-680M	68	20	0.852	0.35	0.35
SRN4026-101M	100	20	1.2	0.3	0.3
SRN4026-151M	150	20	1.92	0.22	0.22
SRN4026-221M	220	20	2.76	0.2	0.2

Soldering Profile

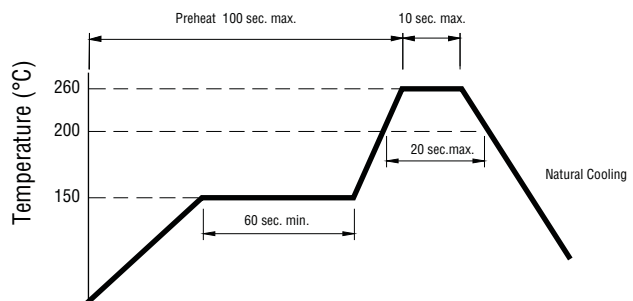

Electrical Schematic



How to Order

Model **SRN4026 - 4R7M**
Value Code (see table)


General Specifications

Operating Temperature -40 °C to +125 °C
(Temperature rise included)
Storage Temperature -10 °C to +40 °C
Resistance to Solder Heat +260 °C for 10 sec.
Temperature Rise 40 °C at rated I_{rms}
Rated Current Inductance drops 30 % at I_{sat}


Materials

Core Ferrite
Wire Enameled copper
Terminal Finish Sn
Coating Magnetic epoxy resin
Packaging 3000 pcs. per 13-inch reel

Product Dimensions

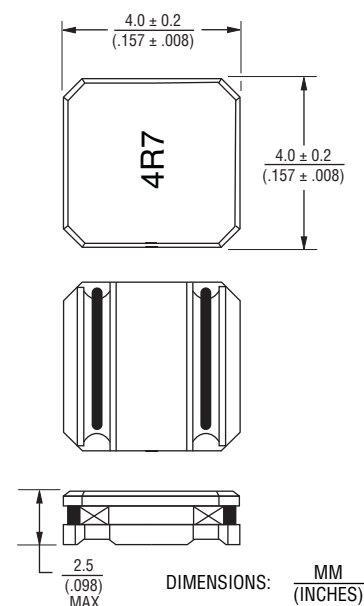

Recommended Layout

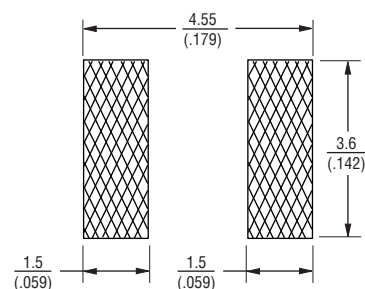

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

**Bourns follows the prevailing definition of "halogen free" in the industry. Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

SRN4026 Series - Semi-shielded Power Inductors

BOURNS®

Packaging Specifications

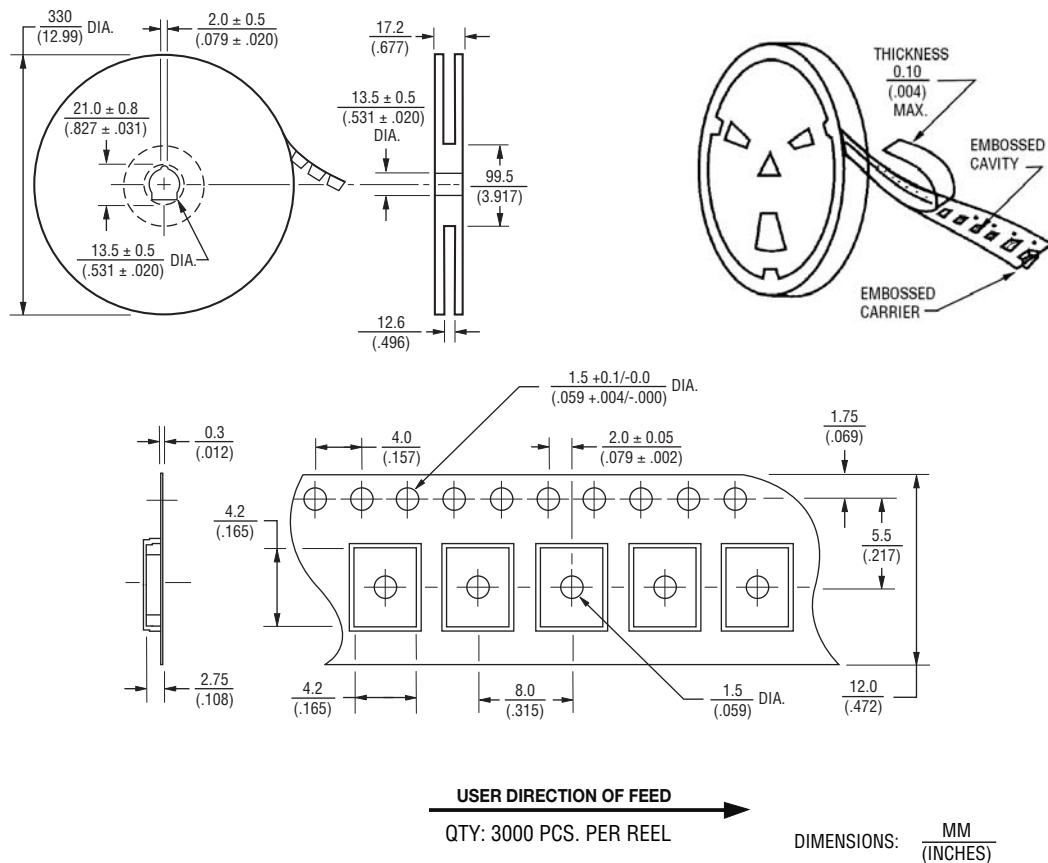

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

EMEA: Tel: +36 88 520 390 • Fax: +36 88 520 211

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[SRN4026-4R7M](#) [SRN4026-150M](#) [SRN4026-151M](#) [SRN4026-3R3M](#) [SRN4026-2R2Y](#) [SRN4026-470M](#) [SRN4026-221M](#) [SRN4026-220M](#) [SRN4026-6R8M](#) [SRN4026-1R0Y](#) [SRN4026-101M](#) [SRN4026-1R2Y](#) [SRN4026-100M](#) [SRN4026-330M](#) [SRN4026-680M](#)