


Industrial 24mm Diameter 5 Watt, Wirewound Rotary Potentiometer

Features

- Dust-proof construction
- Precision linearity
- 5 watt power rating
- Superior resistance stability in temperature and environment change
- Tandem constructions available
- Bushing or twist tab mounting
- Available with pull-push and rotary power switches
- RoHS compliant

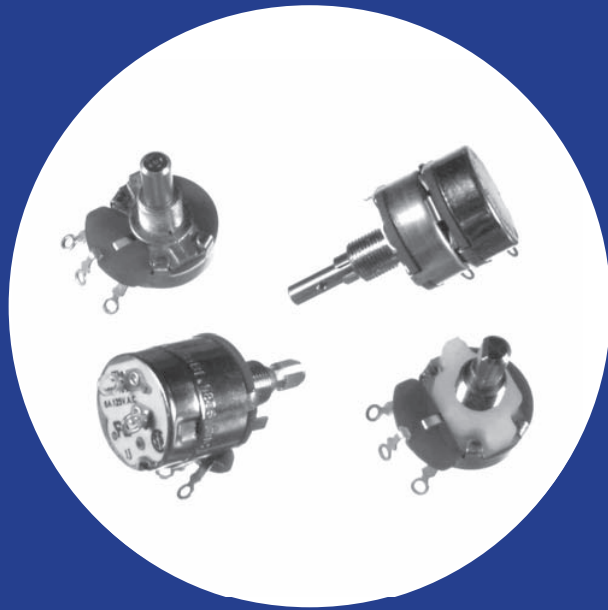

Electrical and Mechanical Specifications

Resistance Range

Linear : 1 ohm through 25K ohms
Audio : 20 ohms through 10K ohms

Resistance Tolerance

±20%, ±10%, ±5%

Power Rating

5 watts @ 25°C

Dielectric Strength

1,000 VAC for 1 minute

Maximum Operating Voltage

500 VDC

Insulation Resistance

100 Megohms minimum @ 250 VDC

Rotational Angle

Mechanical Angle: 300°±5°
Effective Angle:
Without switch: 280°
With switch: 240°

Rotational Torque

3/4 to 6 in. oz. (54 - 432 gf-cm)

Linearity (linear curve only)

Standard: 3% linearity
Special : 2% linearity

Mounting Information

Bushing Mount
Twisted Tab

Power Switch

Rotary Switch-SPST, DPST, SPDT
Pull-Push Switch-SPST (Pull-ON, Push-OFF)

Rotational Life

standard : 10,000 cycles
special : 50,000 , 100,000 cycles


Solder Heat Resistance

Maximum 350° C for 3 sec


Operating Temperature

-30° C to +105° C


T026 Metal Shaft, Bushing Mounting, Type "T" Solder Lug Terminals

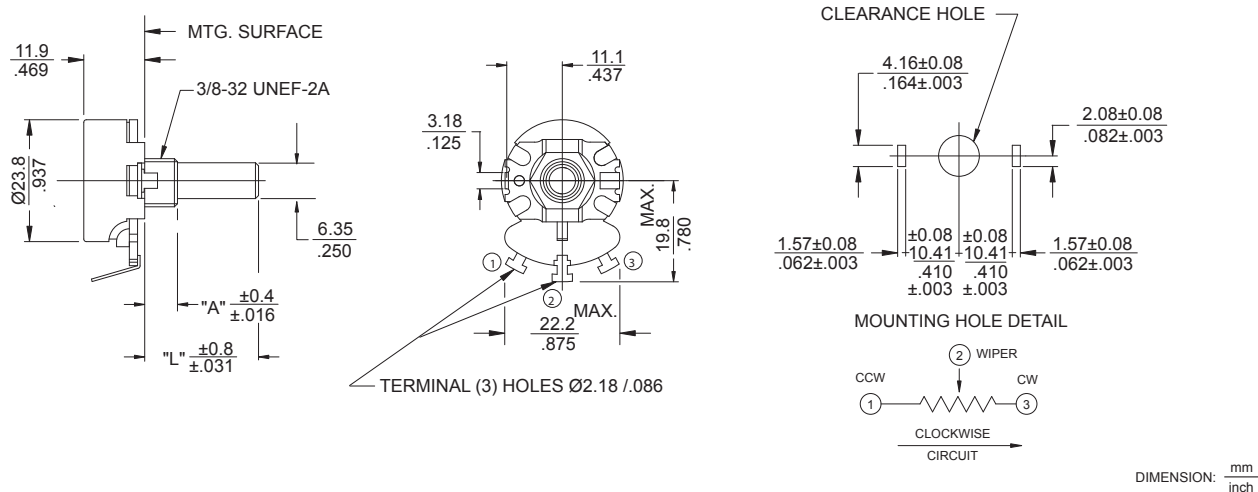


X026 / Y026 Metal Shaft, Bushing Mounting, Printed Circuit Type X/Y Terminals

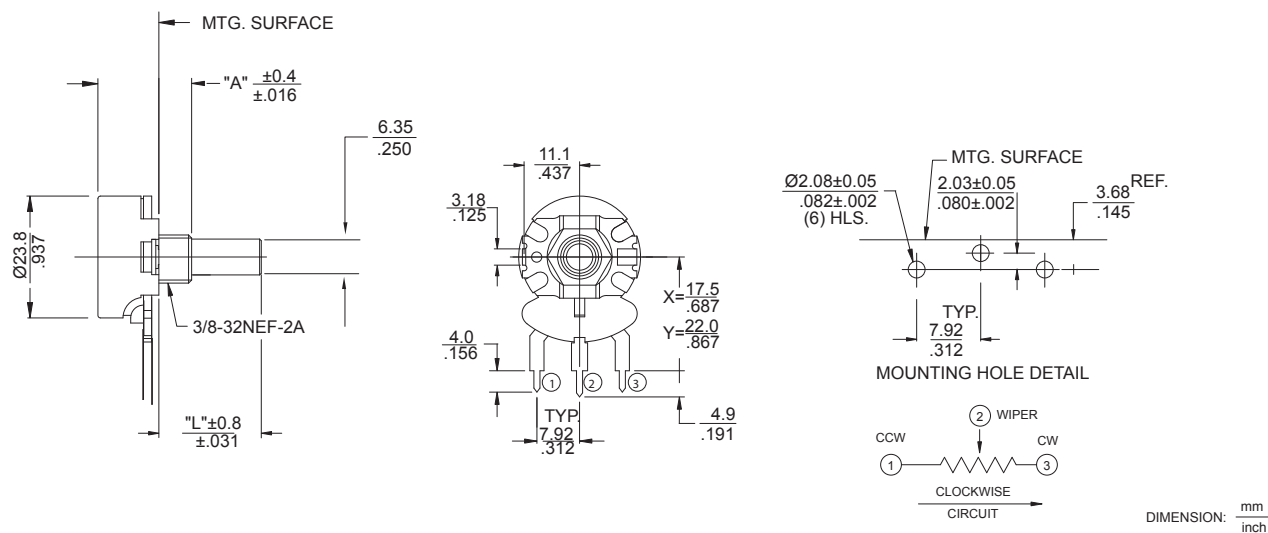


U026 Metal Shaft, Bushing Mounting, Printed Circuit Type “U” Formed Terminals

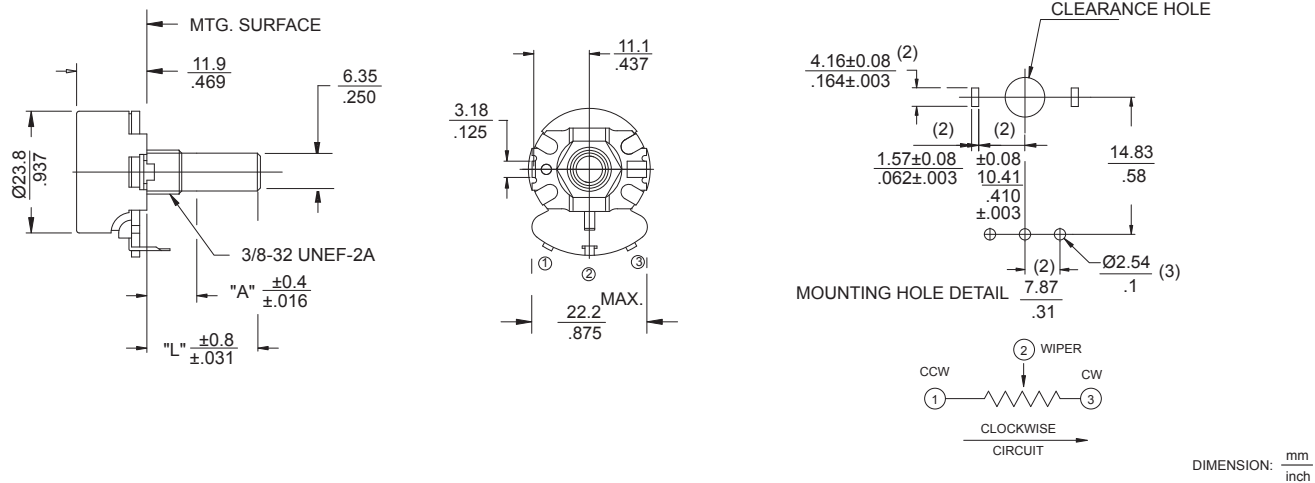


V026 Metal Shaft, Bushing Mounting, Printed Circuit Type “V” Formed Terminals

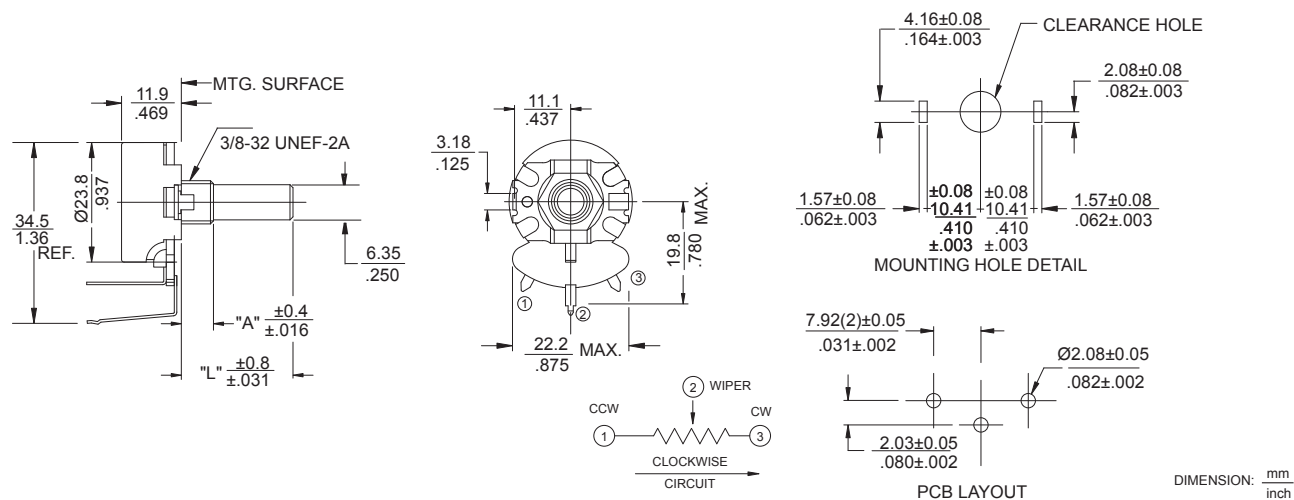


S026 Metal Shaft, Bushing Mounting, Faston Type “S” Formed Terminals

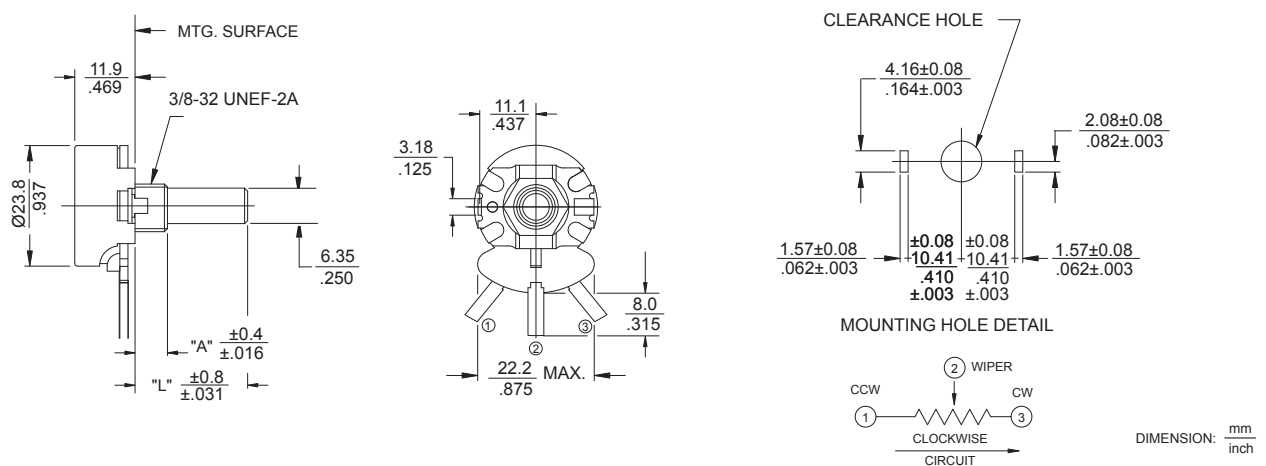

VPE026 Metal Shaft, Twist TAB Mounting, Type "V" Formed Terminals

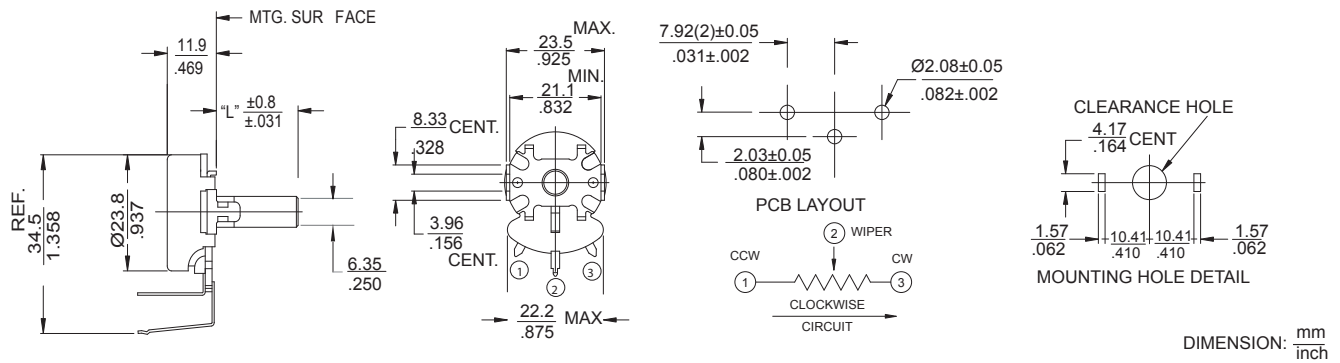

T2-026 Dual-section, Metal Shaft, Bushing Mounting, Type "T" Solder Lug Terminals

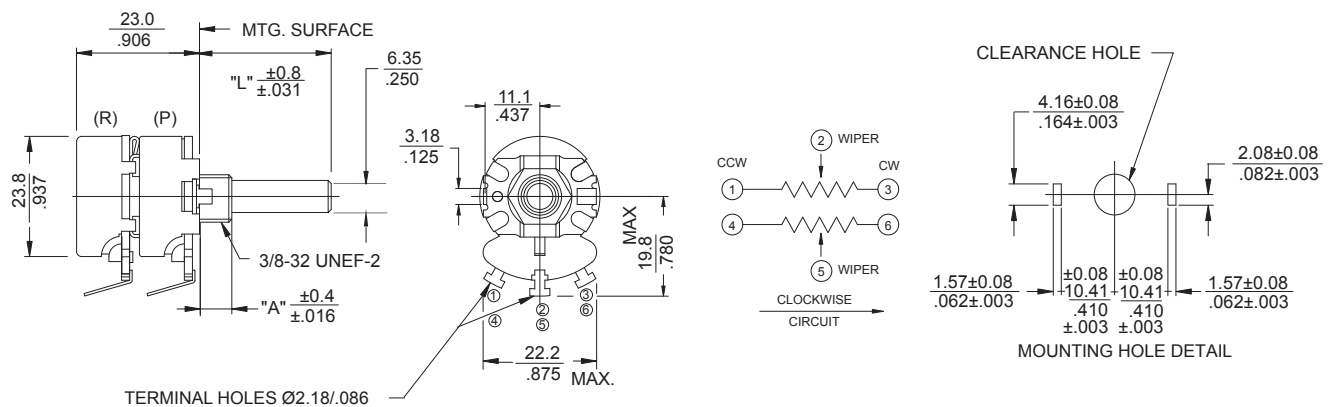

* More multi-section models available, consult CTS for details

Ordering Information

026	T	2	20	R	103	B	1	A	1																																													
TERMINAL STYLE T - SOLDER LUG X - PC .687"(17.5mm) Y - PC .867"(22.0mm) U - FORMED TO FRONT V - FORMED TO REAR S - FASTON	METAL MOUNTING STYLE "A" BUSHING LENGTH: 1/8" INCREMENTS EXAMPLES: 2 - .250"(6.35mm) 3 - .375"(9.53mm) 8 - 1.000"(25.4mm) 1 - TWIST TAB MOUNT A - .250"(6.35mm) DIECAST B - .375"(9.53mm) DIECAST	SHAFT TRIM R - ROUND F - FLATTED .375"X.156" (9.53mmX4.0mm) K - KNURLED EIA S148 24 TEETH S - SD SLOT .063" DEEP X.047" WIDE (1.6mmX1.2mm)	RESIST TOL A - ±10% B - ±20% D - ±5%	TAPER 1 - LINEAR 2 - 20%AUD 3 - 20%CCW AUD	SPECIALS 1 - LOCATING LUG LEFT SIDE 2 - LOCATING LUG RIGHT SIDE 3 - NO LOCATING LUG LOCATING 5 - LOCATING LUG BOTH SIDE																																																	
METAL SHAFT LENGTH "L" FROM MOUNTING SURFACE 1/32"INCREMENTS EXAMPLES: 20 - .625"(6.35mm) 24 - .750"(19.5mm) 28 - .875"(22.2mm) 32 - 1.000"(25.4mm)	RESISTANCE CODE EXAMPLES <table><thead><tr><th>CODE</th><th>RESISTANCE</th></tr></thead><tbody><tr><td>5A0</td><td>5 OHMS</td></tr><tr><td>501</td><td>500 OHMS</td></tr><tr><td>102</td><td>1K</td></tr><tr><td>252</td><td>2.5K</td></tr><tr><td>502</td><td>5K</td></tr><tr><td>103</td><td>10K</td></tr><tr><td>253</td><td>25K</td></tr></tbody></table>	CODE	RESISTANCE	5A0	5 OHMS	501	500 OHMS	102	1K	252	2.5K	502	5K	103	10K	253	25K	<table><thead><tr><th>SWITCHES</th><th>FUNCTION</th><th>CTS TYPE</th><th>CURRENT RATING</th></tr></thead><tbody><tr><td>A - NONE</td><td></td><td></td><td></td></tr><tr><td>B - SPST</td><td>ROTARY</td><td>TGC</td><td>6AMP @ 125VAC</td></tr><tr><td>C - DPST</td><td>ROTARY</td><td>027</td><td>3AMP @ 125VAC</td></tr><tr><td></td><td></td><td></td><td>1AMP @ 250VAC</td></tr><tr><td>D - SPDT</td><td>ROTARY</td><td>028</td><td>3AMP @ 125VAC</td></tr><tr><td>E - SPST</td><td>PULL-PUSH</td><td>FR-K</td><td>3AMP @ 125VAC</td></tr><tr><td>F - SPST</td><td>ROTARY</td><td>FR-GC</td><td>3AMP @ 125VAC</td></tr><tr><td></td><td></td><td></td><td>1AMP @ 250VAC/DC</td></tr></tbody></table> * Refer to series 450 data sheet for power switch detail	SWITCHES	FUNCTION	CTS TYPE	CURRENT RATING	A - NONE				B - SPST	ROTARY	TGC	6AMP @ 125VAC	C - DPST	ROTARY	027	3AMP @ 125VAC				1AMP @ 250VAC	D - SPDT	ROTARY	028	3AMP @ 125VAC	E - SPST	PULL-PUSH	FR-K	3AMP @ 125VAC	F - SPST	ROTARY	FR-GC	3AMP @ 125VAC				1AMP @ 250VAC/DC
CODE	RESISTANCE																																																					
5A0	5 OHMS																																																					
501	500 OHMS																																																					
102	1K																																																					
252	2.5K																																																					
502	5K																																																					
103	10K																																																					
253	25K																																																					
SWITCHES	FUNCTION	CTS TYPE	CURRENT RATING																																																			
A - NONE																																																						
B - SPST	ROTARY	TGC	6AMP @ 125VAC																																																			
C - DPST	ROTARY	027	3AMP @ 125VAC																																																			
			1AMP @ 250VAC																																																			
D - SPDT	ROTARY	028	3AMP @ 125VAC																																																			
E - SPST	PULL-PUSH	FR-K	3AMP @ 125VAC																																																			
F - SPST	ROTARY	FR-GC	3AMP @ 125VAC																																																			
			1AMP @ 250VAC/DC																																																			

* Refer to series 450 data sheet for power switch detail