



FINISHED WIRE DATA		
CONDUCTORS		MATERIAL
INSULATION	MATERIAL	SOLID BARE COPPER
JACKET	MATERIAL	FEP
FILLER	MATERIAL	FR PVC
		POLYOLEFIN

COLOR CODE	
PAIR COLOR CODE	
1	WHT-BLU/BLU
2	WHT-ORG/ORG
3	WHT-GRN/GRN
4	WHT-BRN/BRN

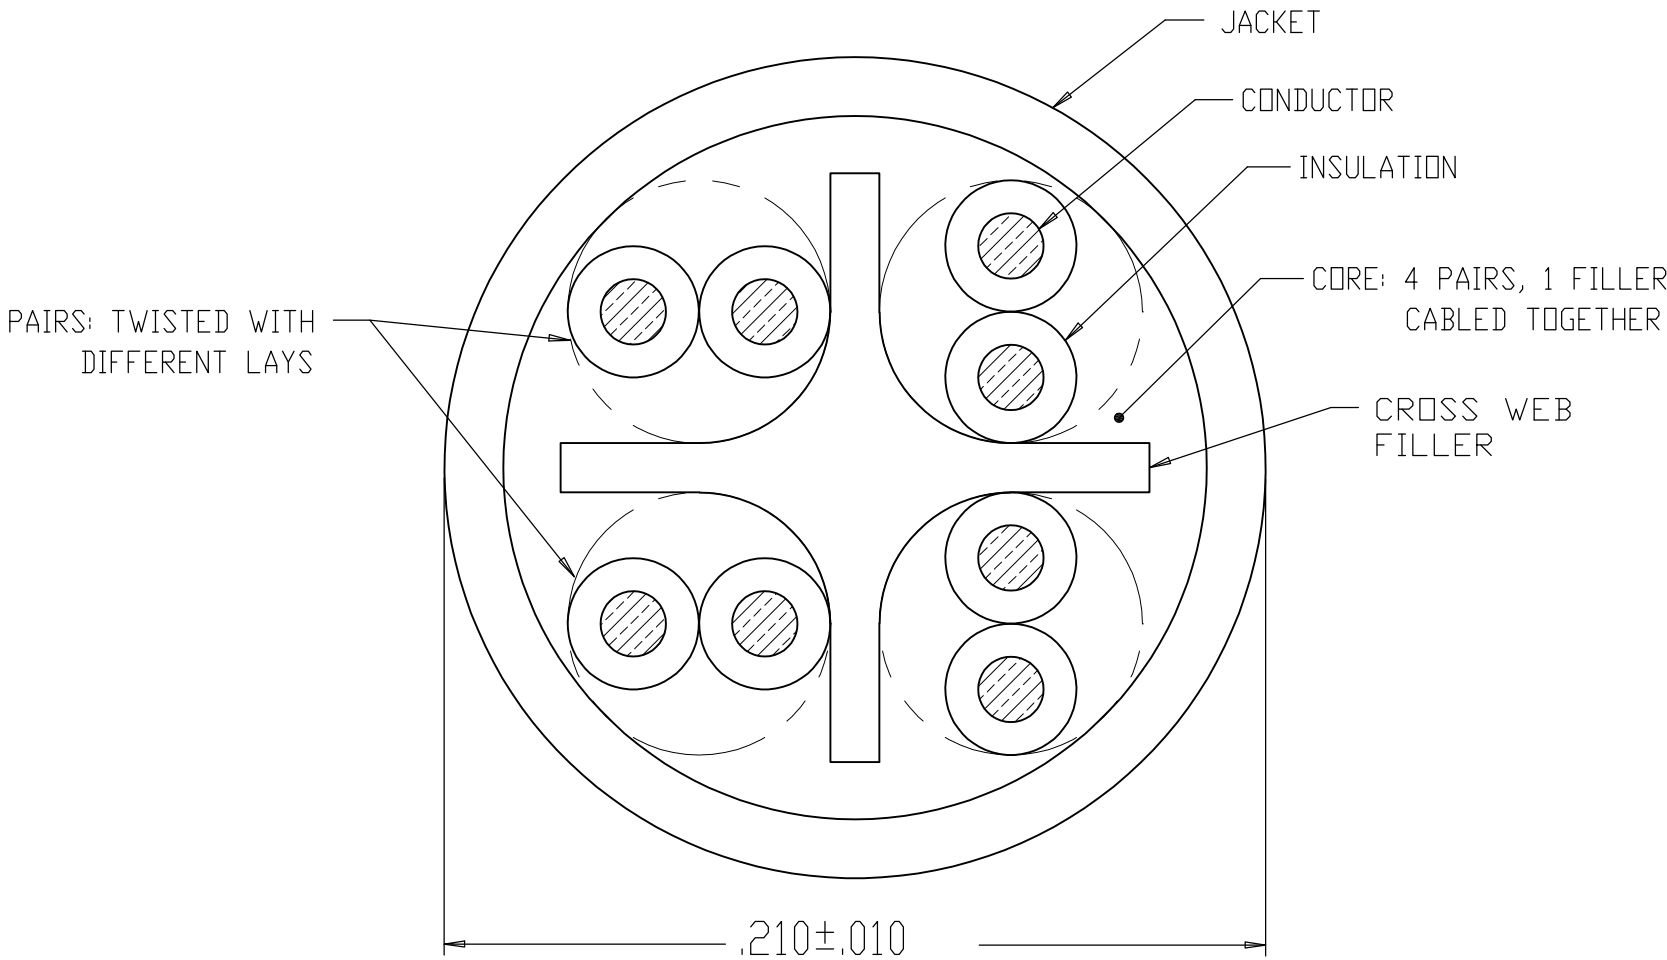

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
HM	00		L	REV ECO-12-012937	18JUL2012	GG

- 1

SEQUENTIAL FOOTAGE RETURNED TO ZERO FOR EACH LENGTH. ON PUTUP LENGTHS 3000 FT OR LESS.
- 2

MATERIALS ARE SELECTED BASED ON THEIR ABILITY TO CONFORM TO UL 444.
- 3

INSULATION COLORS SHALL BE BLUE, ORANGE, GREEN, BROWN AND WHITE WITH CORRESPONDING COLORED STRIPES. THE INSULATION COLOR MAY BE TRANSLUCENT.
- 4

XX = JACKET COLOR - BL = BLUE, WT = WHITE, GY = GRAY, GN = GREEN, YL = YELLOW, OR = ORANGE, RD = RED, VT = VIOLET, BK = BLACK.
- 5

PRINT COLOR SHALL BE DARK BLUE, EXCEPT WHITE ON BLACK JACKET.
- 6

DATE CODE.
- 7

GOVERNING SPECIFICATIONS - LATEST REVISIONS  
NEC 800  
UL444 CMP  
TIA 568-C.2 CAT 6
- 8

REPLACE "02" FOR THE FOLLOWING FOOTAGES:  
04=2000', 05=2500', CALL FOR ADDITIONAL OPTIONS.

CATALOG NUMBER	WEIGHT		PACKAGING
	LBS/KFT	KG/KM	
TE63DP-XX02	30	45	1,000' REEL
TE63DP-XXRB	32	48	1,000' REEL IN A BOX

4



8

LEGEND TO BE REPEATED EVERY 24"

TE CONNECTIVITY 630 SERIES 4/23 AWG T256 CMP CULUS ETL VERIFIED TIA-568-C.2 CAT 6 PAT 6153826, 6150612, 6743983 XXXX FT

1

6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 25JUL2002		 TE Connectivity	
		CHK R. SPEER 25JUL02			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME  CABLE CATEGORY 6E, 4UTP, CMP	
		APVD R. SPEER 25JUL02			
		PRODUCT SPEC  —		SIZE CAGE CODE DRAWING NO  RESTRICTED TO	
APPLICATION SPEC  —					
MATERIAL  —		FINISH  —		A2 00779 C=1499033  —	
		WEIGHT  —			
CUSTOMER DRAWING				SCALE NTS	
				SHEET 1 of 1	
				REV L	