

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F






E

D

C

B

A

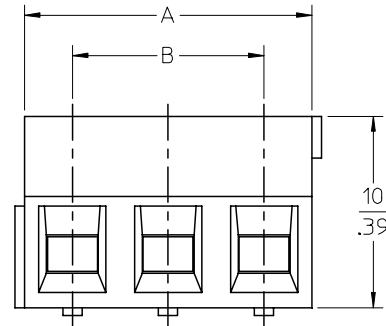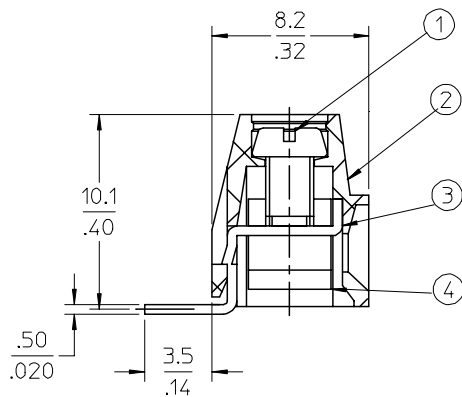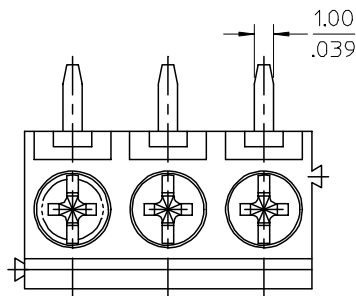

NOTES:

SPECIFICATIONS:

- Material:
 - Screw: C1010,
 - Body: PA66
 - Terminal: Brass
 - Cage: Brass
- Wire range: 24 - 16AWG.
- Electrical rating: 300V, 10A.
- MAX TORQUE: 3.5 in.-lbs.
- Wire strip length: 5.5mm.
- Dielectric withstands: AC2500V for 1 minute.
- Breakdown voltage: 4000v(12/50us), 5 times.
- Insulation resistance: DC500V, 1000M.
- Operating temperature: -40C to +105C.
- A = N x P.
- B = (N - 1) x P
- P = (Pitch) = 5.00MM (.197").
- N = Number of positions available 2 through 24.

ENTER DESCRIPTION EC NO: NEO2006-0310 DRWN: LROTHAUS 2006/01/09 CHKD: CYORK 2006/01/09 APPR: JPAWLICK 2006/01/10		QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY LROTHAUS	DATE 12/6/05	TITLE 5.0MM, EURO TERM BLOCK RIGHT ANGLE, PC MOUNT STACKABLE, STAMPED TERM	MOLEX MOLEX INCORPORATED		
			4 PLACES	± ---	±.0015	CHECKED BY	DATE				
			3 PLACES	± 0.038	±.005	C. YORK	01/06/06				
			2 PLACES	± 0.13	±.01	APPROVED BY	DATE				
			1 PLACE	± 0.3	± ---						
			ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-39543-006		1 OF 1		
A		REV			SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

