



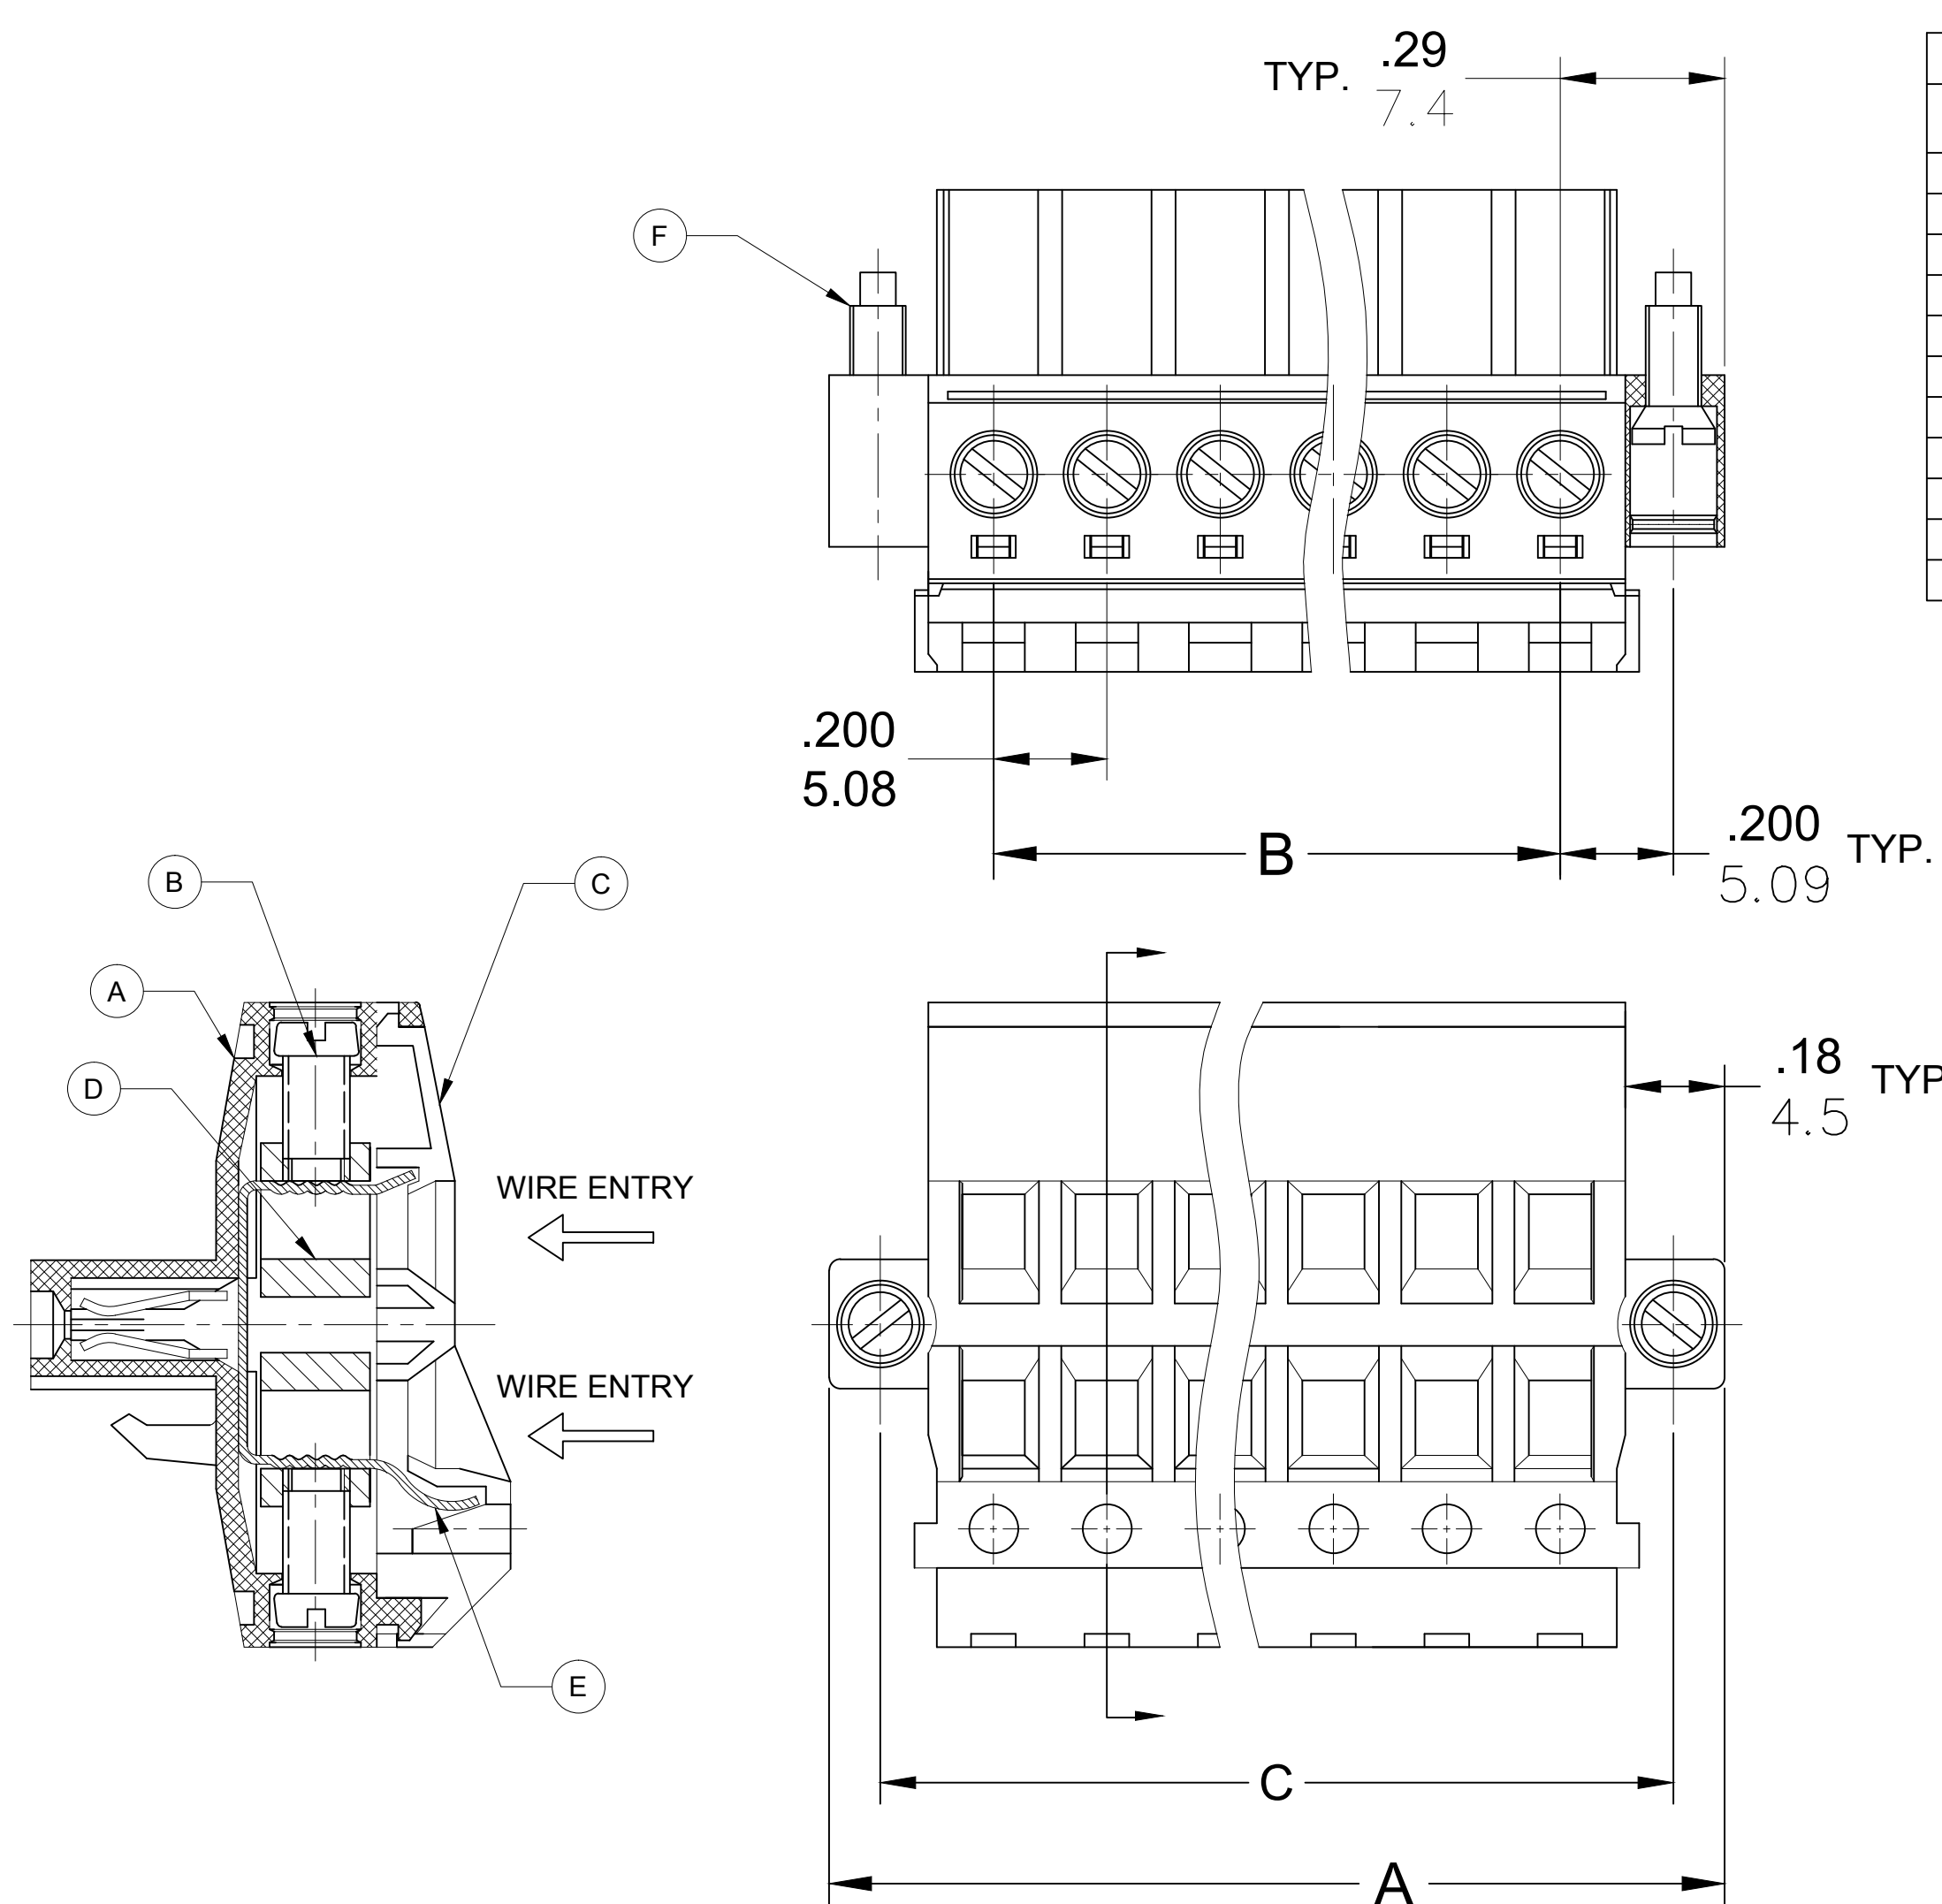


- SPECIFICATIONS
1. MATERIAL:
- A. BODY : PA66, UL94 V-0
 - B. SCREW: M3 STEEL, ZINC PLATED
 - C. COVER: PA66, UL94 V-0
 - D. CAGE: BRASS, NI PLATED
 - E. CONTACT: Cu ALLOY, TIN PLATED
 - F. MTG SCREW: M2.5, STEEL, ZINC PLATED
2. WIRE SIZE: 24~12AWG
3. RATING: 250V, 12A
4. MAX TORQUE: 4.9 IN LBS.
5. WIRE STRIP LENGTH: .39in. (10.0mm)
6. OPERATING TEMPERATURE: -40°C TO +105°C
7. DIMS SHOWN ARE FOR REFERENCE ONLY

PART NUMBER DATA									
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm		B IN mm		C IN mm	
2	397160002	M750B-20-2-02-3	GREEN	.78	19.8	.200	5.08	.600	15.24
3	397160003	M750B-20-2-03-3	GREEN	.98	24.9	.400	10.16	.800	20.32
4	397160004	M750B-20-2-04-3	GREEN	1.18	30.0	.600	15.24	1.000	25.40
5	397160005	M750B-20-2-05-3	GREEN	1.38	35.1	.800	20.32	1.200	30.48
6	397160006	M750B-20-2-06-3	GREEN	1.58	40.2	1.000	25.40	1.400	35.56
7	397160007	M750B-20-2-07-3	GREEN	1.78	45.2	1.200	30.48	1.600	40.64
8	397160008	M750B-20-2-08-3	GREEN	1.98	50.3	1.400	35.56	1.800	45.72
9	397160009	M750B-20-2-09-3	GREEN	2.18	55.4	1.600	40.64	2.000	50.80
10	397160010	M750B-20-2-10-3	GREEN	2.38	60.5	1.800	45.72	2.200	55.88
11	397160011	M750B-20-2-11-3	GREEN	2.58	65.6	2.000	50.80	2.400	60.96
12	397160012	M750B-20-2-12-3	GREEN	2.78	70.6	2.200	55.88	2.600	66.04


REF. LAST 2 DIGITS OF PART NUMBER EQUALS CIRCUIT COUNT

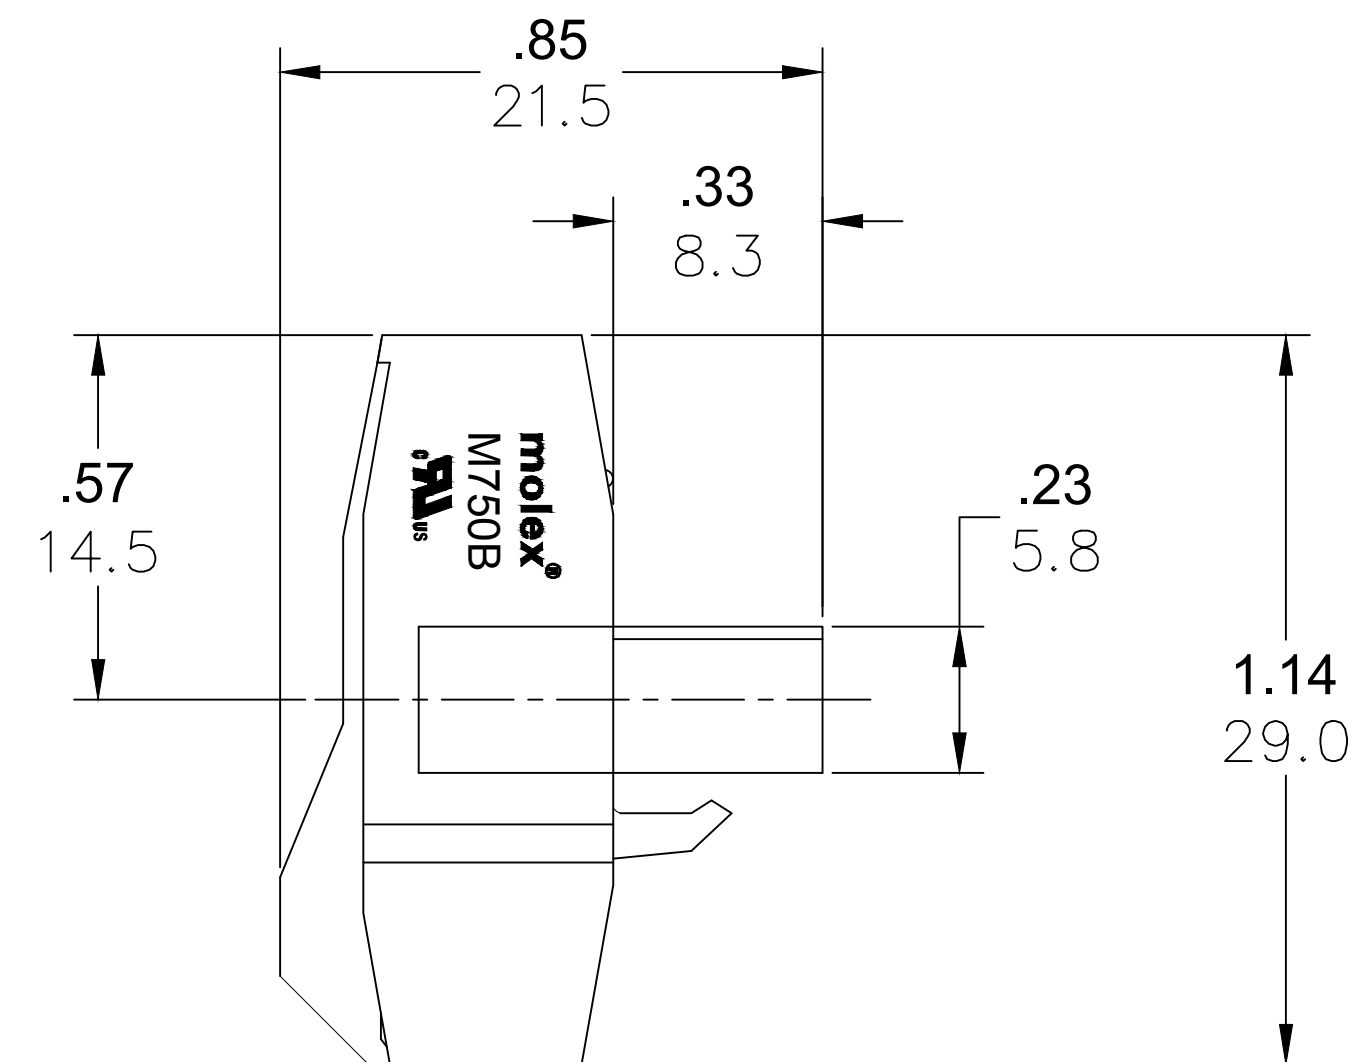

ENGINEERING NUMBER LEGEND

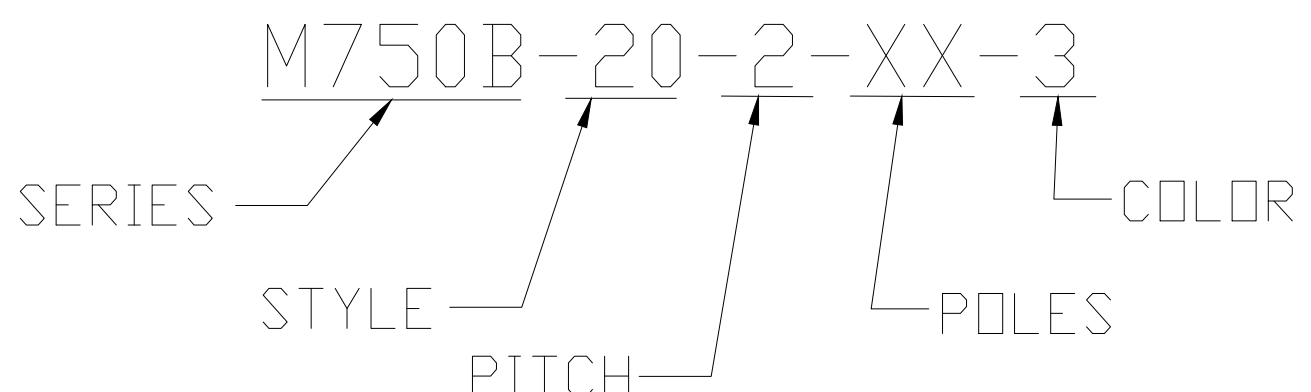

CONTACT FACTORY FOR OPTIONAL COLORS

RELEASED EC NO.: IPG2014-1781 DRWN.: RSTONE 2014/04/24 CHKD.: G FARNSW APPR.: JFMURPHY 2014/10/16 A	DESCRIPTION REV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		 =0		mm	INCH	DRAWN BY RSTONE	DATE 2014/04/24	TITLE TERMINAL PLUG-HORIZ. 5.08MM, DBL WIRE ENTRY WITH MOUNTING ENDS				
		 =0	4 PLACES	±---	±---	CHECKED BY G FARNSW	DATE ----					
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY	DATE 2014/10/16					
			2 PLACES	±0.13	±.01	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-39716-001		SHEET NO. 1 OF 1		
			1 PLACE	±0.3	±---							
					ANGULAR ±---°							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									