

J

I

H

G

F

E

D

C

B

A

13

12

11

10

9

8

7

6

5

4

3

2

1

J

I

H

G

F



E

D

C


B

A

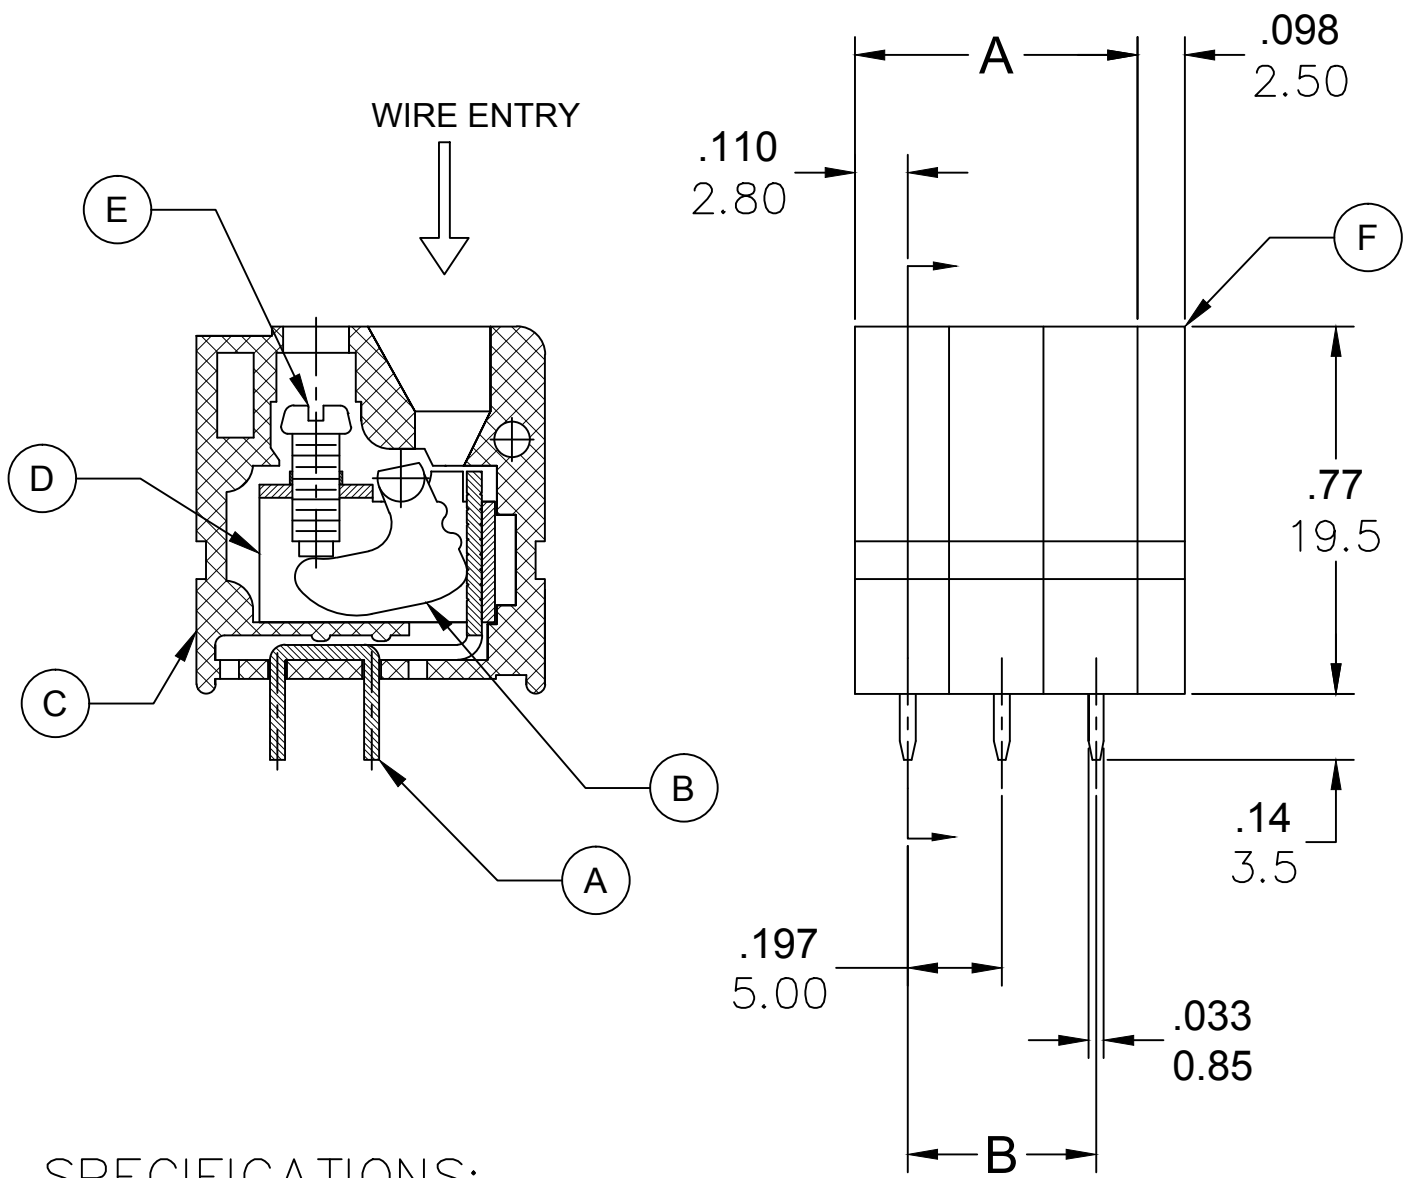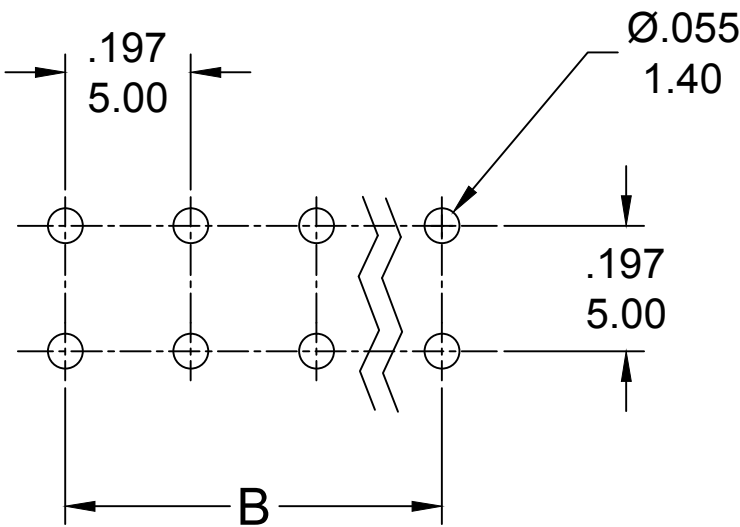

SPECIFICATIONS:


- MATERIAL:
 - A. TERMINAL: BRASS, TIN PLATED
 - B. CAM: STEEL, ZINC PLATED
 - C. BODY: PA66, UL94 V-0
 - D. CAGE: STEEL, ZINC PLATED
 - E. SCREW: M2.5, STEEL, ZINC PLATED
 - F. COVER: PA66, UL94 V-0
- RATING: 300V, 20A
- MAX TORQUE: 4.4 LBF. IN
- WIRE RANGE: 30-12 AWG
- WIRE STRIP: .39 (10.0MM)
- DIELECTRIC VOLTAGE WITHSTAND: AC 2500V FOR 1 MINUTE
- INSULATION RESISTANCE: DC 500V, 500MΩ
- RATED IMPULSE VOLTAGE: 4000V PLUS AND MINUS 5 TIMES EACH
- OPERATING TEMPERATURE: -40°C TO +105°C
- MAX SOLDERING TEMP: +260°C (500°F) FOR 5 SECONDS
- DIMS SHOWN ARE FOR REFERENCE ONLY

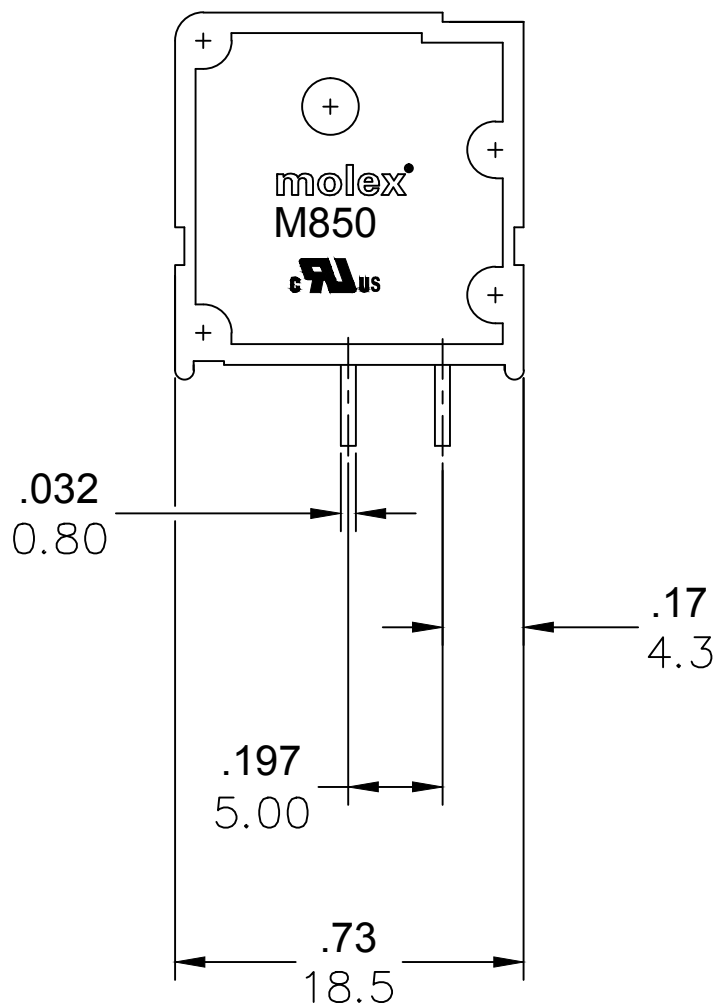

PART NUMBER DATA

CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm		B IN mm	
1	397440001	M850-01-1-01-3	GREEN	.20	5.0	.000	.00
2	397440002	M850-01-1-02-3	GREEN	.39	10.0	.197	5.00
3	397440003	M850-01-1-03-3	GREEN	.59	15.0	.394	10.00
4	397440004	M850-01-1-04-3	GREEN	.79	20.0	.591	15.00
5	397440005	M850-01-1-05-3	GREEN	.98	25.0	.787	20.00
6	397440006	M850-01-1-06-3	GREEN	1.18	30.0	.984	25.00
7	397440007	M850-01-1-07-3	GREEN	1.38	35.0	1.181	30.00
8	397440008	M850-01-1-08-3	GREEN	1.57	40.0	1.378	35.00
9	397440009	M850-01-1-09-3	GREEN	1.77	45.0	1.575	40.00
10	397440010	M850-01-1-10-3	GREEN	1.97	50.0	1.772	45.00
11	397440011	M850-01-1-11-3	GREEN	2.17	55.0	1.969	50.00
12	397440012	M850-01-1-12-3	GREEN	2.36	60.0	2.165	55.00
13		M850-01-1-13-3	GREEN	2.56	65.0	2.362	60.00
14		M850-01-1-14-3	GREEN	2.76	70.0	2.559	65.00
15		M850-01-1-15-3	GREEN	2.95	75.0	2.756	70.00
16		M850-01-1-16-3	GREEN	3.15	80.0	2.953	75.00
17		M850-01-1-17-3	GREEN	3.35	85.0	3.150	80.00
18		M850-01-1-18-3	GREEN	3.54	90.0	3.346	85.00
19		M850-01-1-19-3	GREEN	3.74	95.0	3.543	90.00
20		M850-01-1-20-3	GREEN	3.94	100.0	3.740	95.00
21		M850-01-1-21-3	GREEN	4.13	105.0	3.937	100.00
22		M850-01-1-22-3	GREEN	4.33	110.0	4.134	105.00
23		M850-01-1-23-3	GREEN	4.53	115.0	4.331	110.00
24		M850-01-1-24-3	GREEN	4.72	120.0	4.528	115.00

REF. LAST 2 DIGITS OF PART NUMBER EQUAL CIRCUIT COUNT

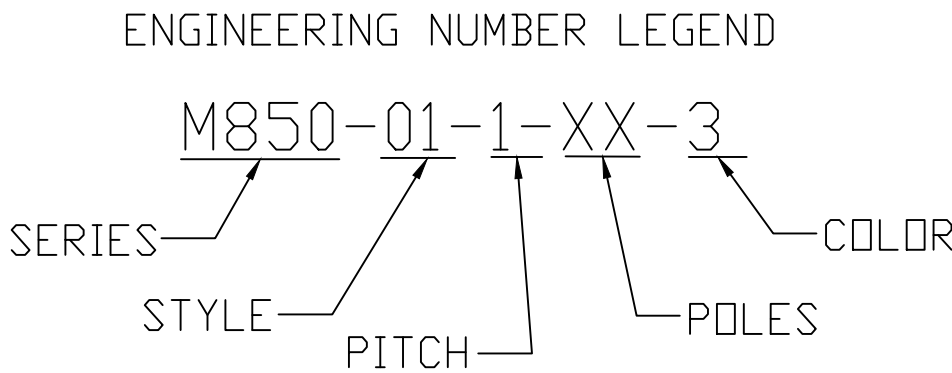

CONTACT FACTORY FOR OPTIONAL COLORS

RELEASED EC NO.: IPG2014-1936 DRWN: RSTONE 2014/06/30 CHKD: - APPR: JFMURPHY 2014/10/16	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY RSTONE	DATE 2014/06/30	TITLE TERM BLOCK, VERTICAL MODULAR, BOX 5.0MM ----					
			4 PLACES	±---	±---	CHECKED BY	DATE						
			3 PLACES	±---	±.005	----		MOLEX INCORPORATED					
			2 PLACES	±0.13	±.01	APPROVED BY	DATE						
			1 PLACE	±0.3	±---	JFMURPHY	2014/10/16	DOCUMENT NO. SD-39744-001					
			ANGULAR ±2°			MATERIAL NO. SEE CHART						SHEET NO. 1 OF 1	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						