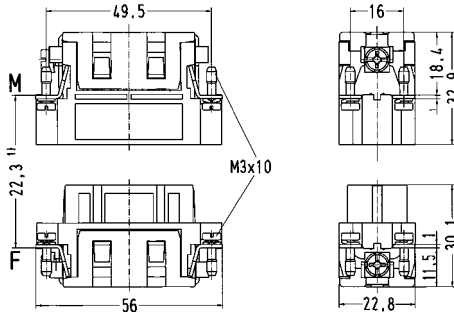
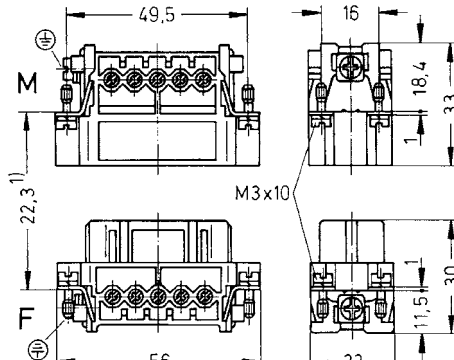
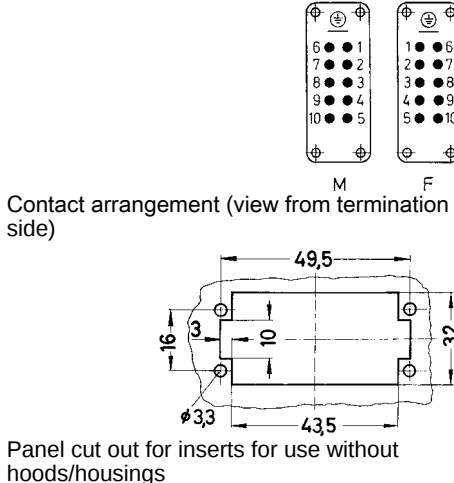


Number of contacts

10+ 
250 V
16 A

Han A

Identification	Wire cross section (mm²)	Part number		Drawing
		male	female	Dimensions in mm
Han A®, Crimp terminal  Please order crimp contacts separately.		09 20 010 3001	09 20 010 3101	 1) Distance for contact max. 24 mm
Han A®, Screw terminal 	0.75–2.5	09 20 010 2612	09 20 010 2812	 1) Distance for contact max. 24 mm
Han A®, Screw terminal, with wire protection 	0.75–2.5	09 20 010 2614	09 20 010 2814	 Contact arrangement (view from termination side) Panel cut out for inserts for use without hoods/housings