

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0461144360

Status:

Active

Overview:

EXTreme LPHPower™ Connectors

Description:

1.27mm, 12.00mm Pitch, EXTreme LPHPower™ Receptacle Header, Vertical, 4 Power Contacts, 36 Signal Contacts, Select Gold (Au) Plating, with BMI Guides

Documents:

3D Model

Drawing (PDF)

Product Specification PS-46114-001-001 (PDF)

Application Specification AS-46114-001-001 (PDF)

Packaging Specification PK-46114-003 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19880

UL

E29179

General

Product Family

PCB Receptacles

Series

46114

Application

Board-to-Board, Power

Application Tooling Part Link

62100-6300

Application Tooling Part Link

62201-8672

Comments

Press Fit Pin

Overview

EXTreme LPHPower™ Connectors

Product Name

EXTreme LPHPower™

UPC

800756886640

Physical

(p)ower-(s)ignal Configuration

4p - 36s

Circuits (Loaded)

40

Circuits (maximum)

40

Color - Resin

Black

Durability (mating cycles max)

250

Flammability

94V-0

Glow-Wire Compliant

No

Guide to Mating Part

Yes

Keying to Mating Part

None

Lock to Mating Part

None

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

8.414/g

Number of Rows

2

Orientation

Vertical

PCB Locator

No

PCB Retention

None

Packaging Type

Tray

Pitch - Mating Interface

1.27mm, 12.00mm

Pitch - Termination Interface

1.27mm, 2.50mm

Plating min - Mating

0.762µm

Plating min - Termination

2.540µm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Stackable

No

Surface Mount Compatible (SMC)


Yes

Temperature Range - Operating

-40°C to +105°C

Termination Interface: Style

Through Hole - Compliant Pin

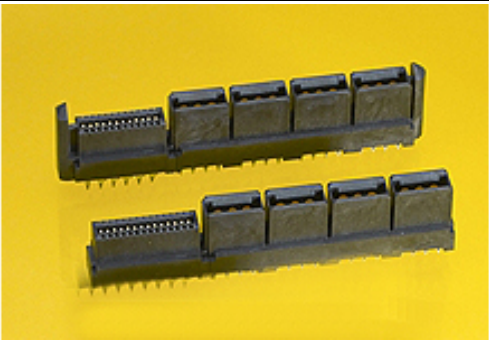

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product
environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

46114 Series

Mates With

45985 EXTreme LPHPower™ Header

Electrical

Current - Maximum per Contact	30.0A
Grounding to PCB	No
Voltage - Maximum	250V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-46114-001-001
Packaging Specification	PK-46114-003
Product Specification	PS-46114-001-001
Sales Drawing	SD-46114-400

This document was generated on 02/21/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION