


MIDI® STYLE BOLT-DOWN FUSE RATED 32V



Also available:
Clear MIDI® version &
MIDI® one hole version















(transparent nylon composite cover / *not UL recognized)

Description

This MIDI® style fuse offers a bolt-on space saving fuse for high current wiring protection and provides time delay characteristics with “Diffusion Pill Technology”. The MIDI® was designed and patented by Littelfuse.

Ratings

Part Number	Current Rating	Housing Material Color	Typ. Voltage Drop Littelfuse max.	Cold Resistance	I ² t
0498023._ ²	23 A		90 mV	3.43 mΩ	1,800 A ² s
0498030._ ²	30 A		65 mV	2.06 mΩ	4,200 A ² s
0498040._	40 A		65 mV	1.398 mΩ	10,000 A ² s
0498050._	50 A		65 mV	1.025 mΩ	13,000 A ² s
0498060._	60 A		68 mV	0.865 mΩ	21,700 A ² s
0498070._	70 A		70 mV	0.72 mΩ	24,000 A ² s
0498080._	80 A		58 mV	0.541 mΩ	24,600 A ² s
0498100._	100 A		60 mV	0.457 mΩ	51,300 A ² s
0498125._ ²	125 A		71 mV	0.394 mΩ	73,200 A ² s
0498150._ ^{1,2}	150 A		77 mV	0.323 mΩ	81,900 A ² s
0498175._ ^{1,2}	175A		77 mV	0.285 mΩ	100,000 A ² s
0498200._ ^{1,2}	200A		77 mV	0.261 mΩ	125,000 A ² s

Note 1: Short circuit protector only Note 2: not UL recognized

Specifications

Interrupting Rating:	1000A @ 32 VDC
Voltage Rating:	32 VDC
Operating Temperature Range:	-40°C to + 125°C
Housing Material:	Out of 94-V0 thermoplastic
Terminal:	Tin plated Copper
Mounting Torque M5:	4.5 Nm +/- 1Nm
Mounting Torque M6:	5.5-6.5 Nm +/- 1Nm
Complies with:	ISO 8820-5 UL 248 Special Purpose Fuses

Ordering Information

Part Number	Package Size
M5 Version	
0498xxx.H	100
0498xxx.M	1000
M6 Version	
0498xxx.MXM6	1000
Clear MIDI® Version	
0498xxx.SXT	20
0498xxx.MXT	1000
One Hole Version	
0498xxx.MX1M5	1000


Time-Current Characteristics

% of Rating	Opening Time Min / Max (s)	
	30-125A	150-200A
75	- / -	360,000 s / -
100	360,000 s / -	- / -
110	14,400 s / -	- / -
150	90 s / 3,600 s	- / -
200	3 s / 100 s	1 s / 15 s
300	0.3 s / 3 s	- / -
350	- / -	0.3 s / 5 s
500	0.1 s / 1 s	0.1 s / 1 s


MIDI® STYLE BOLT-DOWN FUSE RATED 32V



Temperature Derating Curve

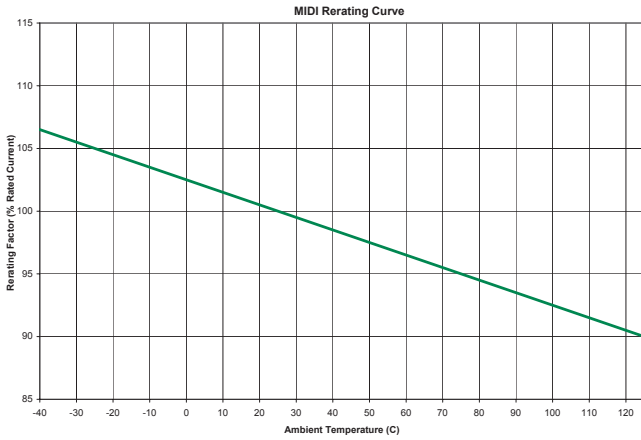


Time-Current Characteristic Curves

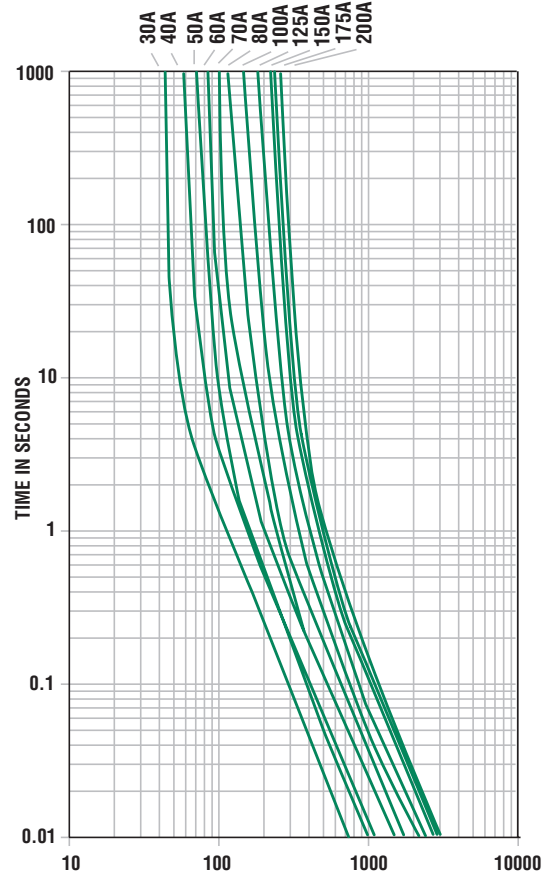

Dimensions

Dimensions in mm

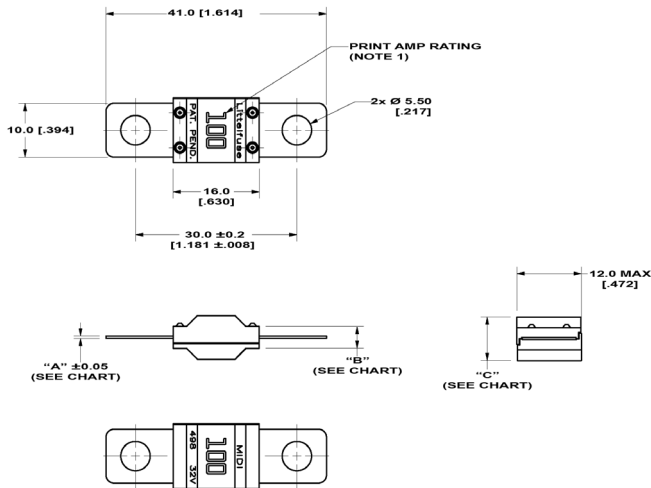

Part Number	"A" mm (inch)	"B" mm (inch)	"C" mm (inch)
0498030_	0.41 (0.016)	4.0 (0.157)	8.0 (0.315)
0498040_	0.41 (0.016)	4.0 (0.157)	8.0 (0.315)
0498050_	0.41 (0.016)	4.0 (0.157)	8.0 (0.315)
0498060_	0.41 (0.016)	4.0 (0.157)	8.0 (0.315)
0498070_	0.41 (0.016)	4.0 (0.157)	8.0 (0.315)
0498080_	0.41 (0.016)	4.0 (0.157)	8.0 (0.315)
0498100_	0.63 (0.025)	4.3 (0.169)	8.3 (0.327)
0498125_	0.63 (0.025)	4.3 (0.169)	8.3 (0.327)
0498150_	0.63 (0.025)	4.3 (0.169)	8.3 (0.327)
0498175_	0.63 (0.025)	4.3 (0.169)	8.3 (0.327)
0498200_	0.63 (0.025)	4.3 (0.169)	8.3 (0.327)