

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705510003

Status:


Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Beveled Plastic Peg, 4 Circuits, Tin (Sn) Plating

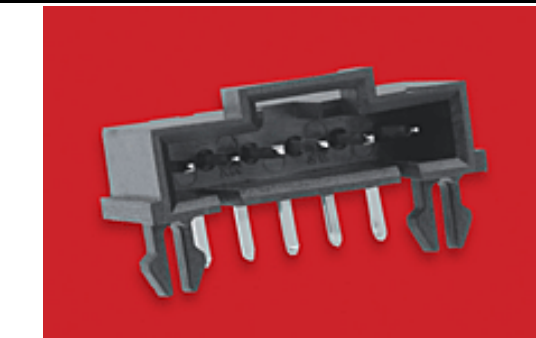

Series image - Reference only

Documents:	
3D Model	Product Specification TS-70541-001-001 (PDF)
Drawing (PDF)	Product Specification TS-70541-100-001 (PDF)
Product Specification PS-70400-001 (PDF)	Packaging Specification PK-70873-0015 (PDF)
Product Specification PS-70541-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	70551
Application	Signal, Wire-to-Board
Data Load Status	Post Go-Live Rev. Not Verified
Made From	0705370307, 0741001002
Overview	SL Modular Connectors
Product Name	SL
UPC	800753762831
Physical	
Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.027/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	3.810µm
Plating min - Termination	3.810µm
Polarized to Mating Part	Yes
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40°C to +105°C

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per	
-ED/01/2018 (15	
January 2018)	
Halogen-Free	
Status	
Not Low-Halogen	
Need more information on product	
environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any	
non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

70551 Series

Mates With

SL Crimp Housing 70066 , 70430 , 70400

Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	003
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0015
Product Specification	PS-70400-001, PS-70541-001, TS-70541-001-001, TS-70541-100-001
Sales Drawing	SDA-70551-****

This document was generated on 03/01/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[70551-0003](#)